

***Analog LCD Monitor  
AL502 User's Manual***

## ***TABLE OF CONTENTS***

---

FCC compliance statement .....	1
DOC compliance notice .....	1
Introduction .....	2
Features .....	2
Unpacking .....	3
Screen position adjustment .....	4
Connecting the power cord .....	4
Safety precaution .....	5
Cleaning your monitor .....	5
Preset modes .....	6
Power saving .....	7
DDC .....	7
Installation .....	8
User controls .....	9
Front panel controls .....	9
Basic section of a OSD screen .....	10
Standard OSD operation .....	11
OSD function description .....	11
Troubleshooting .....	13
Specification .....	14

---

## **FCC Compliance Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against radio frequency interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. If not installed and used in accordance with the instructions, it may cause interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception (this can be determined by turning this equipment off and on), the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between this equipment and the receiver.
- Connect this equipment to an outlet on a circuit different from which the receiver is connected to.
- Consult the dealer or an experienced radio/TV technician for help.

### **Caution:**

To comply with the limits for an FCC Class B computing device, always use the shielded signal cord and shielded DC power cord supplied with this unit.

### **Caution to the user:**

The Federal Communications Commission warns the user that changes or modifications to the unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## **Notice of Compliance Canadian Interference-causing Equipment Regulations**

### **DOC Compliance Notice:**

This digital apparatus does not exceed the Class B limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

### **DOC Avis de Conformation**

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicable aux appareils numériques de la class B prescrites dan le Règlement sur le brouillage radioélectriques édicté par le ministère des Communications du Canada.

### **INTRODUCTION**

Congratulations for purchasing model AL502, a high performance 15-inch color TFT LCD monitor. The AL502 monitor provides flicker-free and color images at optional resolutions. Through this user guide, we will introduce you step-by-step all the features, functions and technical specifications of the LCD monitor. Surely you will have a refreshing experience working with the monitor.

### **FEATURES**


The AL502 is a 15-inch TFT LCD monitor that is intelligent, microprocessor-based and ergonomically designed display, compatible with most analog RGB (Red, Green, Blue) display standards, including PS/V, PS/2, optional for Apple Macintosh Centris, Quadra, and Macintosh II family signals. The LCD monitor is capable of displaying crisp and vibrant color graphics with VGA, SVGA, XGA (non-interlaced), and most Macintosh compatible color video cards.

- The monitor is able to properly function even in case of upgrade video cards or software because of the wide auto-scanning compatibility range without requiring to buy a new monitor.
- The internal microprocessor digitally controls auto-scanning. For horizontal scan frequencies between 31.5 KHz and 60.2 KHz, and vertical scan frequencies between 56.3 Hz and 75.0 Hz. In each frequency mode, the microprocessor-based circuitry allows the monitor to function at the precision-of a fixed frequency.
- The resident memory allows for storing factory default settings and also additional user adjustment parameters.
- The maximum resolution achievable is XGA (1024 x 768), best suited for Windows applications
- The compact and sleek cabinet design saves lot of your desk space and makes your desk look neat and tidy.
- The monitor is compliant with VESA-DPMS power management standard. In order to save energy, the monitor must be connected to a system compliant with the standard.
- The monitor is also compliant with the most stringent environmental scheme of TCO 99. In this scheme, no environmental harmful substances are used during the entire manufacturing process.


## **UNPACKING**

Please check the following items are present when you unpack the box, and save the packing materials in case you will need to ship or transport the monitor in future.


- LCD Monitor (AL502 model)

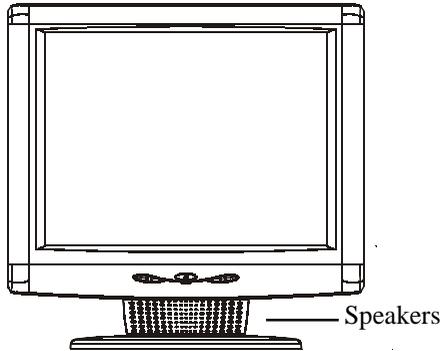


- AC Power Cord




- Audio-In Cable



- User Manual




- Floppy Disk  
(for test pattern and set up)



## **SCREEN POSITION ADJUSTMENT**

In order to optimize the best viewing position, you can adjust the tilt of the monitor by using both of your hands to hold the edges of the monitor as shown in the figure below. The monitor can be adjusted to 30 degrees up or 5 degrees down as indicated by arrow below.

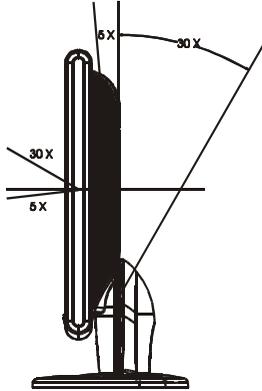

## **CONNECTING THE POWER CORD**

- Check first to make sure that the power cord you use is the correct type required for your area.
- This monitor has a universal power supply that allows operation in either 100/120V AC or 220/240 V AC voltage area. No user-adjustment is required.
- Plug one end of the power cord to the power connector, plug another end to a proper AC outlet.
- For unit using at 120 V AC:  
Use a UL Listed Cord Set, Type SVT wire and plug rated 10 A/125 V.
- For unit using at 220/240 V AC (outside of U.S.):  
Use a Cord Set consisting of H05VV-F cord and plug rated 16 A, 250 V. The cord set should have the appropriate safety approvals for the country in which the equipment will be installed.

---

## ***SAFETY PRECAUTION***

- *Avoid placing the monitor, or any other heavy object, on the power cord to prevent it from fire or electrical shock.*
- *Do not expose the monitor to rain, excessive moisture, or dust to avoid fire or shock hazard.*
- *Do not cover the slots or openings of the monitor for proper heat dissipation. Always put the monitor in a place where there is adequate ventilation.*
- *Avoid placing the monitor against a bright background or where sunlight or other light sources may reflect on the face of the monitor. Place the monitor just below eye level.*
- *Handle with care when transporting the monitor.*
- *Refrain from giving shock or scratch to the screen, as screen is fragile.*

## ***CLEANING YOUR MONITOR***

Please carefully follow the below guidelines when cleaning the monitor.

- Always unplug the monitor before cleaning.
- Use a soft cloth to wipe the screen and cabinet front and sides.
- Apply a small quantity of alcohol to a soft cloth to clean the monitor screen, if requires more than dusting.

**PRESET MODES**

To reduce the need for adjustment for different modes, the monitor has default setting modes that are most commonly used as given in the table below. If any of these display modes are detected, the monitor can self adjust the picture size and centering. For optimum adjustment, the user is suggested to perform the Auto Setup under Windows “Full Screen” pattern or using the pattern in the floppy disk provided. When none of the mode is matched, the user can store their preferred modes in the user modes. The monitor is capable of storing up to 9 user modes. The only condition to store as a user mode is the new display information must have 1 KHz difference for horizontal frequency or 1 Hz for vertical frequency or the sync signal polarities are different from the default modes.

Mode	Resolution			H. Freq. (KHz)	Band Width (MHz)	Polarity	
						H	V
1	VGA	720 x 350	70 Hz	31.47	28.322	+	-
2	VGA	720 x 400	70 Hz	31.47	28.322	-	+
3	VGA	640 x 480	60 Hz	31.47	25.175	-	-
4	MAC	640 x 480	66 Hz	35.00	32.24	-	-
5	VESA	640 x 480	72 Hz	37.86	31.5	-	-
6	VESA	640 x 480	75 Hz	37.50	31.5	-	-
7	VESA	800 x 600	56 Hz	35.16	36	+	+
8	VESA	800 x 600	60 Hz	37.88	40	+	+
9	VESA	800 x 600	75 Hz	46.88	49.5	+	+
10	VESA	800 x 600	72 Hz	48.08	50	+	+
11	MAC	832 x 624	75 Hz	49.72	57.283	-	-
12	VESA	1024 x 768	60 Hz	48.36	65	-	-
13	SUN	1024 x 768	65 Hz	52.45	70.49	-	-
14	VESA	1024 x 768	70 Hz	56.48	75	-	-
15	VESA	1024 x 768	75 Hz	60.02	78.75	+	+

---

## **POWER SAVING**

The monitor will be driven into “Power Saving” mode by the control signal from the display controller, as indicated by the amber-color power LED.

<b>State</b>	<b>Power Consumption</b>	<b>LED Light</b>
ON	Normal	Green
OFF	< 5 W	Amber

The power saving states will be kept until a control signal has been detected or the keyboard or mouse is activated. The recovery time from Active OFF state back to ON state is around 10 seconds.

## **DDC**


To make your installation easier, the monitor is able to Plug and Play with your system if your system also supports DDC protocol. The DDC (Display Data Channel) is a communication protocol through which the monitor automatically informs the host system about its capabilities, for example, supported resolutions and corresponding timing. The monitor supports and DDC2B standard.

## **INSTALLATION**

To install the monitor to your host system, please follow the steps as given below:


### **Steps**

1. Connect Video Cable
  - a. Make sure both the monitor and computer are powered-OFF.
  - b. Connect the video cable to the computer.
2. Connect power cord  
Connect the power cord to the monitor, then to a properly grounded AC outlet.
3. Connect the Audio cable.
4. Power-ON Monitor and Computer  
Power-ON the monitor first, then power-ON the computer.  
This sequence is very important.
5. If the monitor still does not function properly, please refer to the troubleshooting section to diagnose the problem.

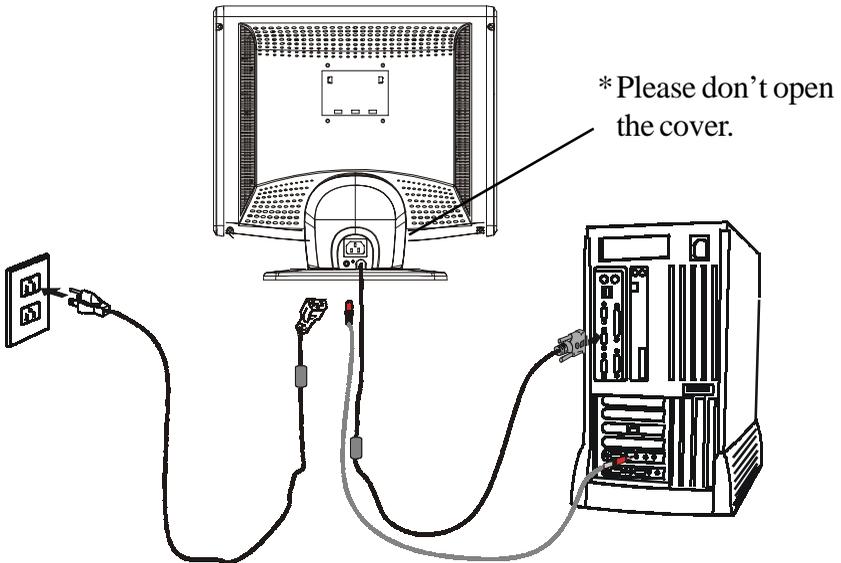

---

## USER CONTROLS

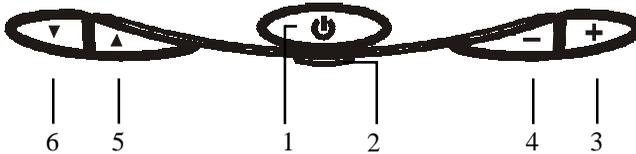

### Front Panel Controls

1. Power Switch: To turn ON or OFF the power.
2. Power LED: Lights up to indicate the power is turned ON.
3. +: To increase the value of the parameter in the OSD, which has been selected for adjustment.
4. -: To decrease the value of the parameter in the OSD, which has been selected for adjustment.
5. Select Up: To move upward in the OSD menu.
6. Select Down: To move downward in the OSD menu.

Basic Sections of a OSD Screen

	BRIGHTNESS
	CONTRAST
	H-POSITION
	V-POSITION
100	

	AUTO ADJUST
	RECALL DEFAULTS
	MUTE ON
	OSD LANGUAGE
	INFORMATION
	NO
	YES

	PHASE
	CLOCK
	OSD H-POSITION
	OSD V-POSITION
	VOLUME
57	

	AUTO ADJUST
	RECALL DEFAULTS
	MUTE ON
	OSD LANGUAGE
	INFORMATION
ENG	FRA ITA DEU ESP

	COLOR BALANCE
9300 7500 6500	USER
R	100
G	94
B	92

	AUTO ADJUST
	RECALL DEFAULTS
	MUTE ON
	OSD LANGUAGE
	INFORMATION
1024 x 768	
FH:60.1KHz	FV:75.1Hz

	AUTO ADJUST
	RECALL DEFAULTS
	MUTE ON
	OSD LANGUAGE
	INFORMATION
	NO
	YES

	OSD DURATION
10 SEC	

	AUTO ADJUST
	RECALL DEFAULTS
	MUTE ON
	OSD LANGUAGE
	INFORMATION
	NO
	YES

## Standard OSD Operation

1. Press any front panel key to activate the OSD menu.
2. Use Select Up or Down keys to move up or down through the menu. The parameter will be highlighted when selected.
3. Then use + or - to increase or decrease the value of the parameter, or make selection between different options.
4. To quit the OSD screen at any time during the operation, press Select Up and Down keys together at the same time. If no keys are pressed for a time period, the OSD automatically disappears.

## OSD Function Description

Item	Function Description
Brightness	To increase or decrease the brightness.
Contrast	To increase or decrease the contrast.
H-Position	To move the screen toward left or right.
V-Position	To move the screen upward or downward.
Phase	To increase or decrease the snow noise of the image.
Clock	The dot clock is fine-adjusted after auto adjust.
OSD H-Position	To move the OSD position horizontally on the screen. When the "+" key is pressed, the OSD control menu will move to the right side of the screen. Likewise when the "-" key is pressed, the OSD control menu will move to the left side.
OSD V-Position	To move the OSD position vertically on the screen. When the "+" key is pressed, the OSD control menu will move to the up side of the screen. Likewise when the "-" key is pressed, the OSD control menu will move to the lower side.
Volume	To increase or decrease the sound level.

## 12 User's Guide

Item	Function Description
Color Balance	Pressing "-" or "+" to select 9300, 7500, 6500 and USER. Only when selecting USER, you can make adjustments to the R/G/B content, otherwise not. Press + and - simultaneously to restore to factory default setting.
Auto-Adjust	Press + to turn on this function. The Auto-Adjust will automatically adjust V-Position, H-Position, Clock, and Clock-Phase, the whole process takes about 5 seconds. (Please install the attached LCD monitor utility disk for Auto-Adjust).
Recall Defaults	To return the monitor to its default settings.
OSD Language	Select among English, French, Italian, Deutsch and Spanish.
Information	Indicates the current resolution, H-Frequency, and V-Frequency.

Note: For above adjustment action, press + and - simultaneously will return to the factory default setting.

## TROUBLESHOOTING

Before sending your LCD monitor for servicing, please check the troubleshooting list below to see if you can self-diagnose the problem.

Problems	Current Status	Remedy
No Picture	LED ON	<ul style="list-style-type: none"> <li>Using OSD, adjust brightness and contrast to maximum or reset to their default settings.</li> </ul>
	LED OFF	<ul style="list-style-type: none"> <li>Check the power switch.</li> </ul>
		<ul style="list-style-type: none"> <li>Check if AC power cord is properly connected to the monitor.</li> </ul>
	LED displays amber color	<ul style="list-style-type: none"> <li>Check if video signal cable is properly connected at the back of monitor.</li> </ul>
<ul style="list-style-type: none"> <li>Check if the power of computer system is ON.</li> </ul>		
Abnormal Picture	Unstable Picture	<ul style="list-style-type: none"> <li>Check if the specification of graphics adapter and monitor is in compliance which may be causing the input signal frequency mismatch.</li> </ul>
	Display is missing, center shift, or too small or too large in display size	<ul style="list-style-type: none"> <li>Using OSD, adjust RESOLUTION, CLOCK, CLOCK-PHASE, H-POSITION and V-POSITION with non-standard signals.</li> </ul>
		<ul style="list-style-type: none"> <li>Using OSD, in case of missing full-screen image, please select other resolution or other vertical refresh timing.</li> </ul>
Abnormal Sound	No sound, or sound level is too low	<ul style="list-style-type: none"> <li>Check the audio cable with the host PC is connected.</li> </ul>
		<ul style="list-style-type: none"> <li>Check the setups of the host PC a minimum or off status.</li> </ul>

**SPECIFICATION**

<b>Model Name</b>	AL502
<b>LCD Display</b>	
Display Type	15" TFT LCD
Power Input Voltage: Frequency:	100-240V AC 50-60 Hz
Current Rating	0.5 A
Display Area (H x V)	304.128 x 228.096 mm
Contrast Ratio	250:1 (Typ.)
Viewing Angle	120°H 75°V (Typ.)
<b>Operational Features</b>	
Display Colors	16,194,277
Resolution	XGA (1024 x 768) at 75Hz maximum.
Brightness	200 cd/m <sup>2</sup> (Typ.)
Response Time	Tr: 15 ms Tf: 35 ms (Typ.)
Interface	Analog RGB
<b>Input Connector</b>	15-pin D-sub / Audio input
<b>Multimedia</b>	
Two Internal Speakers	1 watt output (Max.) x 2
<b>Users Controls</b>	
Front Panel Controls	Power On/Off, Select (Up/ Down) , Value (+/ -)
OSD Controls	Contrast, Brightness, H-Position, V-Position, Phase, Clock, Factory Defaults, Auto-Setup, Color, Language, Volume
<b>Physical Specification</b>	
Dimension (H x W x D)	370 x 385 x 172 (mm)
Net Weight	4.1 Kg
<b>Power</b>	
Power Saving	VESA DPMS standard
Power Consumption	30 W (Typ.)
<b>Regulation</b>	
Safety & EMI	UL, CUL, TUV-GS, TUV-Ergonomics, FCC-B, CE, TCO99 (optional)

\* All specifications are subject to change without notice.