### **EMISSION COMPLIANCE REPORT**

for

Electromagnetic Emissions

of

#### **LCD Monitor**

Trade Name : Compal; acer

**Model Number** : CM870

**Part Number** : CM570; CM670; AM670; AL722

**Serial Number** : N/A

**Report Number**: 020409-C

**Date** : May 13, 2002

Prepared for:

Compal Electronics Inc. No. 581, Juikuang Rd., Neihu, Taipei, Taiwan, R.O.C.

Prepared by:

### **C&C LABORATORY, CO., LTD.**



#B1, 1<sup>st</sup> Fl., Universal Center, No. 183, Sec. 1, Tatung Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

> TEL: (02)8642-2071~3 FAX: (02)8642-2256

This report shall not be reproduced, except in full, without the written approval of C&C Laboratory Co., Ltd.

# TABLE OF CONTENTS

DESCRIPTION	PAGE
VERIFICATION OF COMPLIANCE	3
SYSTEM DESCRIPTION	4
PRODUCT INFORMATION	5
SUPPORT EQUIPMENT	6
MEASUREMENT PROCEDURE & LIMIT (LINE CONDUCTED EMISSION TEST)	7
MEASUREMENT PROCEDURE & LIMIT (RADIATED EMISSION TEST)	9
SUMMARY DATA	12
TEST FACILITY	15
TEST EQUIPMENT	23
BLOCK DIAGRAM OF TEST SETUP	24
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	25
APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT	28

### VERIFICATION OF COMPLIANCE

**Equipment Under Test:** LCD Monitor

Trade Name: Compal Model Number: CM870

**Part Number:** CM570; CM670; AM670; AL722

**Serial Number:** N/A

**Applicant:** Compal Electronics Inc.

No. 581, Jui Kuang Rd., Neihu, Taipei, Taiwan, R.O.C.

Manufacturer: Compal Electronics (China) Co., Ltd.

No. 988, Tung Fen East Rd., Economic & Technical Development Zone

Kunshan, Jiangsun, P.R. China

**Type of Test:** C-Tick Class B

**Measurement Procedure:** AS/NZS 3548:1995+A1: 1997+A2: 1997

**File Number:** 020409-C

**Date of test:** May  $9 \sim 10, 2002$ 

**Deviation:** None **Condition of Test Sample:** Normal

The above equipment was tested by C&C Laboratory Co., Ltd. for compliance with the requirements set forth in the Australian EMC regulations and the requirements procedure according to AS/NZS 3548. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Kurt Chen / Q.A. Manager

### **SYSTEM DESCRIPTION**

# **EUT Test Program:**

- 1. EMI test program was loaded and executed in Windows 98 mode.
- 2. Data was sent to EUT filling the screen with upper case of "H" patterns.
- 3. Test program sequentially exercised printer and modem, then sent "H" patterns to them individually.
- 4. PC plays music on CD-ROM and sends to EUT via an audio cable.
- 5. Repeat 2 to 4. Test program is self-repeating throughout the test.

### PRODUCT INFORMATION

**Housing Type:** Plastic

**EUT Power Rating:** DCV from Power Adapter

**AC power during Test:** 240VAC/50Hz to Power Adapter

**Power Adapter Manufacturer:** LI SHIN

Power Adapter Model Number: LSE9901B1260

**Power Adapter Power Rating:** I/P: 100-240VAC, 50/60Hz, 1.5A

O/P: 12VDC, 5A

**AC Power Cord Type:** Unshielded, 1.8m (Detachable) to Power Adapter

**DC Power Cable Type:** Unshielded, 1.8m (Non-detachable) at Power Adapter

with a core

**OSC/Clock Frequencies:** 11.0592MHz/14.318MHz

**17.4" LCD Panel Manufacturer:** Fujitsu **Model:** FLC445XC8V

AU L170E3-1-M170EN04

HYUNDAI HT17E11

**VGA Cable Type:** Shielded, 1.8m with two cores (Detachable)

#### I/O Port of EUT:

	I/O Port Type	Q'TY	Tested with
1.	Video Port	1	1
2.	Line in Port	1	1
3.	Earphone Port	1	1

# SUPPORT EQUIPMENT

No.	Equipment	Model #	Serial #	FCC ID	Trade Name	Data Cable	Power Cord
1.	PC	Presario 5180	1L8ABX422174	FCC DoC	Compaq	Audio Cable: Unshielded, 1.8m	Unshielded, 1.8m
2.	Modem	2400	94-364-176-277	DK467GSM24	Computer Peripherals	Shielded, 1.8m	Unshielded, 1.8m
3.	Printer	2225C	3050S82775	DSI6XU2225	HP	Shielded, 1.8m	Unshielded, 1.8m
4.	PS/2 Keyboard	SK-2800C	B1C790BCPJCN6L	GYUR79SK	Compaq	Shielded, 1.8m	N/A
5.	PS/2 Mouse	M-CAA43	LZA11750827	FCC DoC	Logitech	Shielded, 1.8m	N/A
6.	Earphone	GT-2004V	A5-1	N/A	GITON	Shielded, 1.8m	N/A

**Note:** All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

**Grounding:** Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

# MEASUREMENT PROCEDURE (PRELIMINARY LINE CONDUCTED EMISSION TEST)

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per AS/NZS 3548 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per AS/NZS 3548.
- 3) All I/O cables were positioned to simulate typical actual usage as per AS/NZS 3548.
- 4) The EUT received AC power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5) All support equipment received power from a second LISN supplying power of 110VAC/60Hz, if any.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

#### Mode(s):

- 1.  $1280 \times 1024$  Resolution (75Hz) + AU LCD Monitor
- 2.  $1024 \times 768$  Resolution (75Hz) + AU LCD Monitor
- 3.  $800 \times 600$  Resolution (75Hz) + AU LCD Monitor
- 4. 1280 × 1024 Resolution (75Hz) + HYUNDAI LCD Monitor
- 5. 1280 × 1024 Resolution (75Hz) + Fujitsu LCD Monitor
- 10) After the preliminary scan, we found the following test mode producing the highest emission level.

#### Mode: 1.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for final testing.

# MEASUREMENT PROCEDURE (FINAL LINE CONDUCTED EMISSION TEST)

- 1) EUT and support equipment was set up on the test bench as per step 10 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Q.P. mode, then the emission signal was re-checked using an A.V. detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

#### **Data Sample:**

Freq.	Q.P.	Average	Q.P.	Average	Q.P.	Average	Note
MHz	Raw	Raw	Limit	Limit	Margin	Margin	
	dBuV	dBuV	dBuV	dBuV	dB	dB	
X.XX	43.95		56	46	-12.05	-2.05	L 1

Freq. = Emission frequency in MHz

Raw dBuV = Uncorrected Analyzer/Receiver reading

Limit dBuV = Limit stated in standard

Margin dB = Reading in reference to limit

Note = Current carrying line of reading

"---" = The emission level complied with the Average limits,

at least 2dB margin, so no recheck anymore.

# LINE CONDUCTED EMISSION LIMIT

Frequency	Maximum	RF Line Voltage
	Q.P.	AVERAGE
150kHz-500kHz	66-56dBuV	56-46dBuV
500kHz-5MHz	56dBuV	46dBuV
5MHz-30MHz	60dBuV	50dBuV

\*\*Note: The lower limit shall apply at the transition frequency.

# MEASUREMENT PROCEDURE (PRELIMINARY RADIATED EMISSION TEST)

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per AS/NZS 3548 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per AS/NZS 3548.
- 3) All I/O cables were positioned to simulate typical actual usage as per AS/NZS 3548.
- 4) The EUT received AC power source from the outlet socket under the turntable. All support equipment received 110VAC/60Hz power from another socket under the turntable, if any.
- 5) The antenna was placed at 10 meter distance away from the EUT as stated in AS/NZS 3548. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7) The following test mode(s) were scanned during the preliminary test:

#### Mode(s):

- 1.  $1280 \times 1024$  Resolution (75Hz) + AU LCD Monitor
- 2.  $1024 \times 768$  Resolution (75Hz) + AU LCD Monitor
- 3.  $800 \times 600$  Resolution (75Hz) + AU LCD Monitor
- 4. 1280 × 1024 Resolution (75Hz) + HYUNDAI LCD Monitor
- 5. 1280 × 1024 Resolution (75Hz) + Fujitsu LCD Monitor
- 8) After the preliminary scan, we found the following test mode producing the highest emission level.

#### Mode: 1.

Then, the EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for final testing.

# MEASUREMENT PROCEDURE (FINAL RAIDATED EMISSION TEST)

- 1) EUT and support equipment were set up on the turntable as per step 8 of the preliminary test.
- 2) The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 3) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit, and only QP reading will record in this report.
- 4) The test data of the worst case condition(s) was reported on the Summary Data page.

#### **Data Sample:**

Freq.	Raw Data	Corr. Factor	Emiss. Level	Limits	Margin
(MHz)	( dBuV/m )	(dB)	( dBuV/n	n ) =======	(dB)
XX.XX	12.20	10.88	23.08	30.0	-6.92

Freq. = Emission frequency in MHz

Raw Data (dBuV/m) = Uncorrected analyzer/Receiver reading

Corr. Factor (dB) = Correction factors of antenna factor and cable loss Emiss. Level (dBuV/m) = Raw reading converted to dBuV and CF added

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Reading in reference to limit

# **RADIATED EMISSION LIMIT**

Frequency	Distance	Maximum Field Strength Limit
(MHz)	(m)	(dBuV/m/ Q.P.)
30-230	10	30
230-1000	10	37

<sup>\*\*</sup>Note: The lower limit shall apply at the transition frequency.

# SUMMARY DATA (LINE CONDUCTED TEST)

**Model Number:** CM870 **Location:** Site # 3

**Tested by:** Tommy Lin

**Test Mode:** Mode 1

Test Results: Passed

Temperature: 25? Humidity: 55? RH

(The chart below shows the highest readings taken from the final data)

FREQ MHz	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.169	45.00		65.01	55.01	-20.0		L1
2.181	26.40		56.00	46.00	-29.6		L1
3.052	36.35		56.00	46.00	-19.7		L1
4.072	36.80		56.00	46.00	-19.2		L1
14.319	27.50		60.00	50.00	-32.5		L1
14.781	27.60		60.00	50.00	-32.4		L1
0.169	44.80		65.01	55.01	-20.2		L2
2.348	27.80		56.00	46.00	-28.2		L2
3.668	35.70		56.00	46.00	-20.3		L2
3.901	37.10		56.00	46.00	-18.9		L2
14.501	31.90		60.00	50.00	-28.1		L2
14.682	31.80		60.00	50.00	-28.2		L2

L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

\*\*NOTE: "---" denotes the emission level complied with the Average limit, with at least 2dB margin,

so no further recheck.

# **SUMMARY DATA**

# (RADIATED EMISSION TEST)

Model Number: CM870 Location: Site # 1

**Tested by:** Tommy Lin **Polar:** Vertical – 10m

**Test Mode:** Mode 1

**Detector Function:** Quasi-Peak **Test Results:** Passed

Temperature: 28? Humidity: 69? RH

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	Raw Data ( dBuV/m )	Corr. Factor (dBuV)	Emiss. Level ( dBuV/m	Limits	Margin (dB)
33. 06	8. 3	18. 9	27. 2	30.0	-2.8
47. 67	11. 5	12. 6	24. 1	30. 0	-5.9
135. 25	14. 0	12. 2	26. 2	30. 0	-3.8
210. 88	13. 7	10. 6	24. 3	30. 0	-5.7
629. 27	10. 9	23. 0	33. 9	37. 0	-3. 1
840. 06	5. 0	28. 5	33. 5	37. 0	-3.5

### **SUMMARY DATA**

# (RADIATED EMISSION TEST)

**Model Number:** CM870 **Location:** Site # 1

**Tested by:** Tommy Lin **Polar:** Horizontal – 10m

**Test Mode:** Mode 1

**Detector Function:** Quasi-Peak **Test Results:** Passed

Temperature: 28? Humidity: 69? RH

(The chart below shows the highest readings taken from the final data)

Freq.	Raw Data ( dBuV/m )	Corr. Factor (dBuV)	Emiss. Level ( dBu	Limits V/m )	Margin (dB)
139. 72	12.8	12. 3	25. 1	30.0	-4.9
210. 27	12. 5	10. 6	23. 1	30.0	-6. 9
280. 12	14. 9	16. 1	31.0	37. 0	-6. 0
349. 52	15. 2	17. 7	32. 9	37. 0	-4.1
629. 63	10. 5	23. 0	33. 5	37. 0	-3. 5
768. 20	8. 3	26. 2	34. 5	37. 0	-2.5

### **TEST FACILITY**

**Location:** No. 81-1, 210 Lane, Pa-de 2<sup>nd</sup> Road, Lu-Chu Hsiang, Taoyuan, Taiwan,

R.O.C.

**Description:** There are four 3/10m open area test sites and three line conducted labs for

final test.

The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:

1992 and CISPR 22/EN 55022 requirements.

**Site Filing:** A site description is on file with the Federal Communications

Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Registration also was made with Voluntary Control Council for

Interference (VCCI).

**Site Accreditation:** Accredited by NEMKO (Authorization #: ELA 124) for EMC &

A2LA (Certificate #: 824.01) for Emission

Also accredited by BSMI for the product category of Information

Technology Equipment.

**Instrument Tolerance:** All measuring equipment is in accord with ANSI C63.4 and CISPR 22

requirements that meet industry regulatory agency and accreditation agency

requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

Site # 3 & # 4 Line Conducted Test Site: At Shielding Room





THE AMERICAN FOR LABORATORY

#### ACCREDITED LABORATORY

A2LA has accredited

C & C LABORATORY CO., LTD Hsi Chin, Taipei Hsien, Taiwan, R.O.C

for technical competence in the field of

#### **Electrical Testing**

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This liaboratory meets the requirements of ISO/IEC 17025—1999 "Garman Requirements for the Competence of Testing and Californian Laboratories" and any additional program requirements in the identified field of testing. Testing and californian laboratories that comply with this inharmational Standard also operate in accordance with 150 9001 or ISO 8002 (1994).

Presented this 30° day of January, 2002.



President Programme Accreditation Council Certificate Number 824.01 Valid to January 31, 2004

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scape of Accreditation



SCOPE OF ACCREDITATION TO ISOMEC 17025-1999

C & C LABORATORY CO., LTD<sup>2</sup>
No. 81-1, Laise 210, Ps.-De 2<sup>21</sup> Rd.,
Lu Chu Helsing, Tsoyaun, TAIWAN, R.O.C
Kuri Chee
Phore: 602 886 7 324 5235
Fac: 602 886 7 324 5235

ELECTRICAL (EMC)

Valid to: Jonusey 31, 2004

Conflicte Number: 0824-01

to recognition of the successful completion of the AZLA evaluation process, accretitation is granted to this laboratory to perform the following electromagnetic connectivities seen:

Test Technology Test Methodisco

Extratory Radinted & Conducted

CFR 47, FCC Part 15/18 using ANSI 63.4/1992.6/1000, ASN/23 3348; VCCL V5 (2001); CNS 13438; CNS 11439; CNS 15783; CNS 15803; CNS 14015 CISPR 11; EN 5901; CISPR 24; EN 59014—1; CISPR 18; EN 59015; CISPR 24; EN 55022. EN 50082-1/EN 61000-6-4; 2001 EN 50082-1/EN 61000-6-4; 2001

Blochostair Discharge (ESD)
Radisted Interesting
Radisted Interesting
Radisted Interesting
Radisted Interesting
Radisted Interesting
Radisted Interesting
Radisted
Ra

HECEN 61000-4-2; HEC 101-2 HECEN 61000-4-3; HEC 101-3 HECEN 61000-4-4; HEC 801-4 HECEN 61000-4-5 HECEN 61000-4-6

IBC/EN 61000-4-11 IBC/EN 61000-3-2; IEC/EN 61000-3-3

leter Abye

Note: This accreditation covers testing performed at the main laboratory fixed above, and the satelline laboratory located at No.199, Chang Shang Road, Hain Tien City, Talpel, TAIWAN, R.O.C.

(A2LA Cert. No. 0824.01) 01/30/02

5301 Buckeystown Pike, Suite 350 + Frederick, MD 21784-8373 + Phone: 301-644 3248 + Fax: 301-662 2974

Product Instantly / Generic Instantly ITE Product Home Appliance Residential, communical and light Industry Industry

CISPR 24; EN 55024 CISPR 14-2; EN 530-14-2 EN 310081-2/ EN 63000-6-1; 2001 EN 50082-2/ EN 61000-6-2: 2001

On the following productional production of the Computer Computer Computer Computers and Peripherals: Networking Computers: Wireless Computerations Computers: Infections, Home Appliances

Peter Bloga

(AZLA Cert. No. 0824.01) 01/30/02

Page 2 of 2

May 13, 2002



FEDERAL COMMUNICATIONS COMMISSION Equipment Authorization Division 7435 Oakland Mills Road Columbia, MD. 21046

February 01, 1999

Registration Number: 93105

C & C Laboratory Co., Ltd. 1st Fl., No. 344, Fu Ching Street Taipei Taiwan, R.O.C.

Attention: Charles Wang

Re: Measurement facility located at Taoyuan, Site No. 4 3 & 10 meters Date of Listing: February 01, 1999

Gentlemen

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Societa 2,948 of the FCC Ruiss. The description has, therefore, been placed on file and the same of your organization added to the Commissions like of facilities whose measurement dails be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Ruites. Please note that this filling must be updated for any changes made to the facility, and at least every three years from the date of fisting the date on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement survives for the public on a fee basis. An up-to-date fit of such public test facilities is available on the Internet on the I-CC Website at WWW.ICC.GOV, Lieutronic Filing, OEF Equipment Authorization Lieutronic Filing.

Sincerely,

Thomas W Phillips Electronics Engineer FEDERAL COMMUNICATIONS COMMISSION Laboratory Division 7435 Oakland Mills Road Columbia, MD. 21046

February 27, 2001

Registration Number: 90471

C & C Laboratory Co., Ltd. #B1, 1st Fl., No. 183, Sec. 1 Tatung Rd., Hsi Chih Taipei Taiwan, R.O.C. Attention: Kurt Chen

> Re: Measurement facility located at Taoyuan Sites No. 1 & 3 (3 & 10 meters) Date of Listing: February 27, 2001

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the innex of your organization added to the Commission's live of facilities where measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filling must be undeated for any changes made to the facility, and at least every three years from the data of listing the data on the must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public teat facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, F-Filing, OFT Equipment Authorization Electronic Filing.

Sincerely,

Thomas W Phillips Rectronics Engineer



ENG 3/9

22 January 1998

C & C Laboratory Co Ltd 1st FI No. 344 Fu Ching Street Taipei TAIWAN ROC

Attention: Mr Tony Houng

Dear Sir

#### LABORATORY APPROVAL

Thank you for your submission of 21 January regarding the approval of your testing laboratory to the Ministry of Commerce's laboratory approval criteria. Thank you for your interest in this matter.

I am pleased to advise that your submission has been successful and your laboratory has been added to the list of Ministry-approved laboratories. Your approved status is valid until 31 December 1998. At this time, the Approved Laboratory scheme will cease operation with the implementation of the new radiocommunications regulations. Test reports from your laboratory will be accepted under the new framework. Please find enclosed a copy of the Ministry's discussion paper. DP10, outlining the proposed compliance process from 1 January 1999.

If you have any further questions on this matter please do not hesitate to contact me.

Yours faithfully

Andrew Dyke Senior Technical Officer(Regulatory)

Operations and Risk Management Branch, Ministry of Commerce Building, 35 Bowen Street, Wellington, New Zualand BO, Box 2847, Telephone (04) 472 0030, Fox (04) 473 2489 COMMERCE
MINISTRY OF COMMERCE
Te Manufu Tauhokohoko

ENG 3/9 AJD

22 January 1998

C & C Laboratory Co Ltd 1st FI No. 344 Fu Ching Street Taipei TAIWAN ROC

Attention: Mr Tony Houng

Dear Sir

#### LABORATORY APPROVAL

Thank you for your submission of 21 January regarding the approval of your testing laboratory to the Ministry of Commerce's laboratory approval criteria. Thank you for your interest in this matter.

I am pleased to advise that your submission has been successful and your laboratory has been added to the list of Ministry-approved laboratories. Your approved status is valid until 31 December 1998. At this time, the Approved Laboratory scheme will cease operation with the implementation of the new radiocommunications regulations. Test reports from your laboratory will be accepted under the new framework. Please find enclosed a copy of the Ministry's discussion paper, DP10, outlining the proposed compliance process from 1 January 1999.

If you have any further questions on this matter please do not hesitate to contact me.

Yours faithfully

Andrew Dyke Senior Technical Officer(Regulatory)

Operations and Risk Management Branch, Musistry of Commerce Building, 35 Bowen Niveer, Wellington, New Zealand BO, Bix 2847, Telephone (04) 472 0030, Fax (04) 472 0489

May 13, 2002





#### World-wide Testing and Certification

ELA 4RTTE

#### **EMC Laboratory Authorisation**

Aut. No. : ELA 192

#### Testing of

#### Radio & Telecommunications Terminal Equipment

C & C Laboratory Co., Ltd. No. 15, 14 Lin, Chin Twu Chi, Lu Chu Hsiang, Taoyuan 338, Taiwan R.O.C.

Score of Authorisation:

All CENELEC and ETSI standards [ENs and ETSs that are listed on the accompanying page, and, all of the corresponding CISPR, EC, and ISO EMC standards]. This authorisation covers all of the EMC-related testing and documentation within the scope of the Radio and Telecommunications Terminal Equipment [R&TTE] Directive [i.e. 1999/SEC].

NOTE: This authorisation also covers EMC-related testing and documentation that is within the scope of Article 10.5 of the EMC Directive [Le. 89/336/EEC as amended by 92/31/EEC]

This Authorisation Document confirms that the above mentioned EMC Laboratory has been validated against EM 45001 and found to be compliant. The laboratory has fulfill the conditions described in Nemko Document ELA 10. During Pernko's visit to the laboratory, an assessment was made of the relevant parts of your cognitisation - i.e. refullite, personnel qualifications, see equipment, and existing practices. It was found that the EMC Laboratory is capable of performing tests within the Scope of Authorisation given on the accompanying page. Accordingly, Nemko will accept your test reports as a basis for attenting conformity to these EMC Sundards for the products in question under the European Union's Directives specified above.

For Type Examination Certification(s) to be issued by Nemko, your EMC Laboratory's test report(s) will be accepted by Nemko if they are enclosed with the Application Form submitted by the manufacturer.

In order to maintain the Authorisation, the information given in the embedded HAAINFOR (3 may) must be carefully followed. Nemko is to be promptly notified about any changes in the situation at your EMC Laboratory which may affect considered to be fulfilled. The Authorisation may at any time be withdrawn if the conditions are no longer considered to be fulfilled.

The Authorisation is valid through 31. December 2003.

Oslo 26 April 2001

For Nemko AS: Lell Bergh

Kjell Bergh, Nemko Group EMC Co-ordinator

Telephons: +17 12 96 05 30 Fax: +17 12 96 05 50

(N) Nemko

World-wide Testing and Certification

**EMC Laboratory** Authorisation Aut. No. : ELA 124

EMC Laboratory:

C & C Laboratory Co., Ltd. No. 15, 14 Lin, Chin Twu Chi, Lu Chu Hsiang, Taoyuan 338, Taiwan R.O.C.

Scope of Authorization: All CENELEC standards [ENs] for EMC that are listed on the accompanying page, and, all of the corresponding CISPR, IEC, and ISO EMC standards that are listed on the accompanying page.

This Authorisation Document confirms that the above-mentioned EMC Laboratory has been validated against EN 45001 and found to be compliant. The laboratory also fulfils the conditions described in Nemko Document ELA 10. During Nemko's visit to the laboratory an assessment was made of the relevant parts of your organisation - i.e. facilities, personnel qualifications, test equipment, and testing practices. It was found that the EMC Laboratory is capable of performing tests within the Scope of Authorisation given on the accompanying page. Accordingly, Nemko will accept your test reports as a basis for anesting conforming to these EMC Standards for the products in question under the European Union EMC Directive [89/336/FEC as amended by 92/31/EEC and 98/13/EC].

In case of applications for Product Certification(s) to be issued by Nemko, your EMC Laboratory's test report(s) will be accepted by Nemko if they are enclosed with the Application Form submitted by the manufacturer.

In order to maintain this Authorization, the information given in the enclosed ELA-INFOs (if any) must be carefully followed. Nemko is to be promptly notified about any changes in the situation at your EMC Laboratory, which may affect the basis for this Authorization. The Authorization may at any time be withdrawn if the conditions are no longer considered to be fulfilled.

The Authorisation is valid through 31 December 2003

Oslo 26 April 2001

For Nemko AS:

Kill Borgh

Kjell Bergh, Nemko Group EMC Co-ordinator

N Nemko

#### World-wide Testing and Certification

ELA 4RTTE

#### **EMC Laboratory Authorisation** Aut. No. : ELA 192

(Page 2 of 2)

#### SCOPE OF AUTHORISATION

Ceneric and product-family standards R&TTE

Generic and product-	iamny standards, K&IIE		
ETS 300 328:1996 + A1:97	ETS 300 342-1 :1997	EN 301 489-08 :2000	
EN 300 328-2:2000	EN 301 489-07 :2000		
10V 300 422-2 :2000	ETS 300 445 :1996 + A1 :97	KN 300 454-2 :2000	
	EN 301 489-09 :2000		
ETS 300 683 :1997	ETS 300 826 :1997	EN 301 357-2:2000	
EN 301 489-03 :2000	EN 301 489-17 :2000		
EN 301 419-1:1999	EN 301 419-2:1999	EN 301 419 3:1999	
EN 301 489-01:2000			

Basic standards

Dubie billian ac		
EN 61000-4-2:1995 + A1:98 IEC 61000-4-2:1995 + A1:98	EN 61000-4-3:1996 + A1:98 IEC 61000 4 3:1995 + A1:98	EN 61000-4-4:1995 IEC 61000-4-4:1995
(EN 60801-1:1993 10C 801.2:1991 IEC 801.2:1984)	(IEC 801.3:1984 ENV 50140:1993 + ENV 50204:1995)	(IEC 801.4:1990)
EN 61000 4 5:1995 IEC 61000-4-5:1995	EN 61000-4-6:1996 IEC 61000-4-6:1996	EN 61000-4-8:1993 IEC 61000-4-8:1993
(KNV 50142:1994)	(10NV 50141:1993)	
EN 61000-4-11:1994 IEC 61000-4-11:1994		

Oslo 26 April 2001

Kjell Bergh, Nemko Group EMC Co-ordinator

Pentral address:
P.O.Bas 18 Billiolem
N-4314 OKLO, NOBWAY

Telephone: +47 23 % 03 % Fax: +47 23 % 05 68 %

N Nemko

**World-wide Testing and Certification** 

ELA 4

**EMC Laboratory** Authorisation Aut. No. : ELA 160

EMC Laboratory:

C & C Laboratory Co., Ltd. No. 15, 14 Lin, Chin Twu Chi, Lu Chu Hsiang, Taoyuan 338, Taiwan R.O.C.

Scope of Authorization:

EN 60601-1-2 and IEC 60601-1-2, the Collateral Standards for electromedical products, with particular application to EMC requirements only.

This Authorisation Document confirms that the above mentioned EMC Laboratory has been validated against EM 45001 and found to be compliant. The laboratory also fulfils the conditions described in Nemko Document ELA 10. During Nemko's visit to the laboratory as assessment was made of the relevant parts of your organisation - i.e. facilities, personnel qualifications, lest equipment, and testing practices. It was found that the EMC Laboratory is capable of performing tests within the Scope of Authorisation listed above. Accordingly, Nemko will accept your test reports as a basis for attesting conformity to these EMC Standards for the products in question under either the Puropean Union Medical Device Directive [MDD], 90/385/EEC, or the European Union Active Implantable Medical Device Directive [AMD], 90/385/EEC, as applicable). This Authorisation Document confirms that the above mentioned EMC Laboratory has

In case of applications for Product Certification(s) to be issued by Nemko, your EMC Laboratory's test report(s) will be accepted by Nemko if they are enclosed with the Application Form submitted by the manufacturer.

In order to maintain the Authorisation, the information given in the enclosed ELA-INFOs (if any) must be carefully followed. Nemko is to be promptly notified about any changes in the situation at your EMC Laboratory which may affect the basis for this Authorisation. The Authorisation may at any time be withdrawn if the conditions are no longer considered to be fulfilled.

The Authorisation is valid through 31. December 2003.

Oslo 26 April 2001

For Nemko AS:


Kill Burgh


Kjell Bergh, Nemko Group EMC Co-ordinator


Postal address: P.O.Ber 73 Blinders N-0314 OSLO, NORWAY

Telephone: +47 22 % 03 30 Fax: +47 22 % 05 50



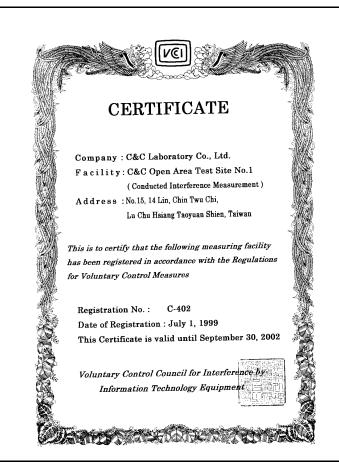

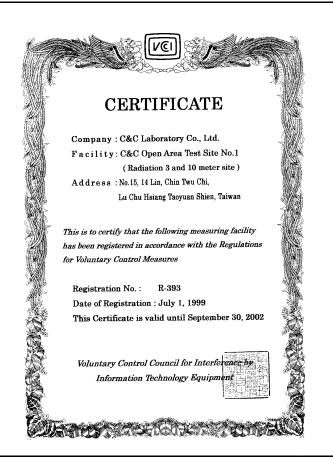


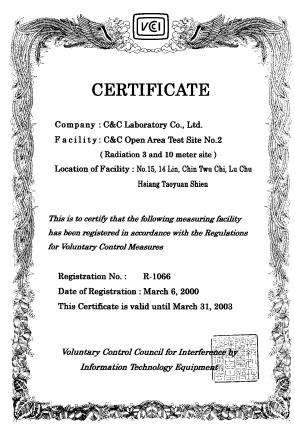









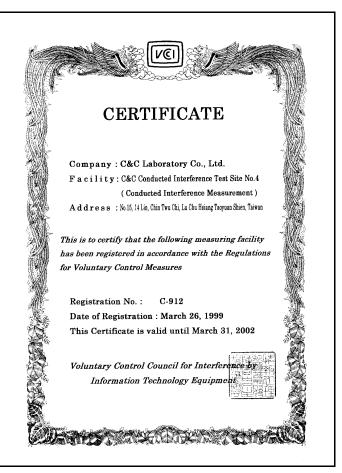


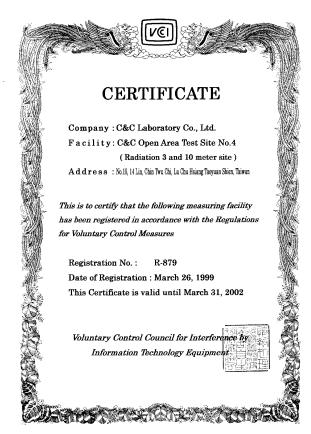






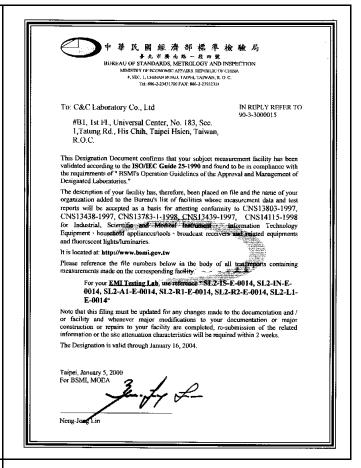

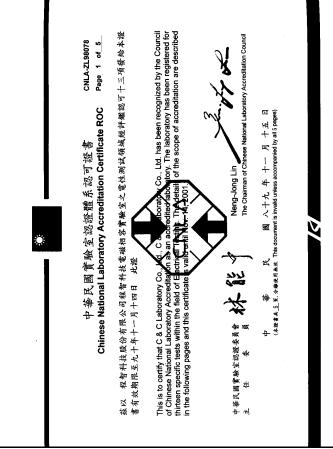



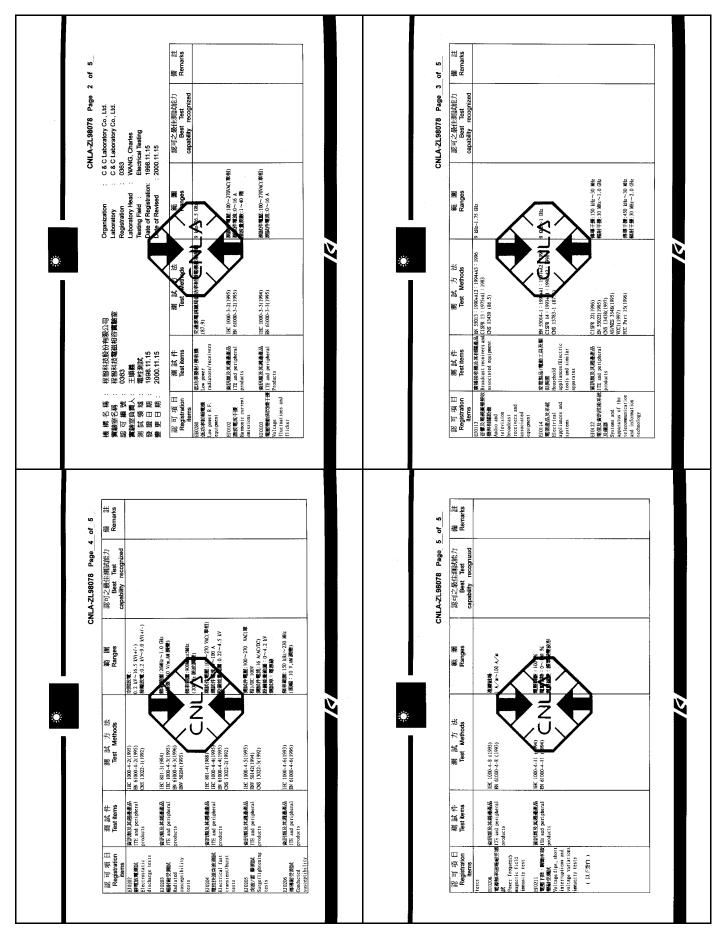

# TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at C & C Laboratory, Co., Ltd. for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2-1988 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10kHz to 1.0 / 2.0 GHz.

#### **Equipment used during the tests:**

Open Area Test Site: #1

Open Area Test Site # 1								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Q.P Adaptor	HP	85650A	2811A01399	06/19/2001	06/18/2002			
RF Pre-selector	HP	85685A	2947A01064	06/19/2001	06/18/2002			
Spectrum Analyzer	HP	8568B	3001A05004	06/19/2001	06/18/2002			
S.P.A Display	HP	85662A	3014A18846	06/19/2001	06/18/2002			
Precision Dipole	SCHWAZBECK	VHAP	998/999	05/17/2001	05/16/2002			
Precision Dipole	SCHWAZBECK	UHAP	981/982	05/17/2001	05/16/2002			
Bilog Antenna	CHASE	CBL6112A	2309	02/09/2002	02/08/2003			
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R			
Antenna Tower	EMCO	2075-2	9707-2604	N.C.R	N.C.R			
Controller	EMCO	2090	N/A	N.C.R	N.C.R			
RF Switch	ANRITSU	MP59B	M54367	N.C.R	N.C.R			
Site NSA	C&C	N/A	N/A	11/03/2001	11/02/2002			
Spectrum Analyzer	ADVANTEST	R3261A	21720279	08/16/2001	08/15/2002			

**Conducted Emission Test Site:** #3

Conducted Emission Test Site # 3								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
EMI Test Receiver	R&S	ESCS30	847793/012	12/19/2001	12/18/2002			
LISN	R&S	ESH2-Z5	843285/010	12/10/2001	12/09/2002			
LISN	EMCO	3825/2	9003-1628	07/16/2001	07/15/2002			

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

# **BLOCK DIAGRAM OF TEST SETUP**


### System Diagram of Connections between EUT and Simulators

EUT: LCD Monitor

Trade Name: Compal; acer

Model Number: CM870

AC Power Cord: Unshielded, 1.8m to Power Adapter

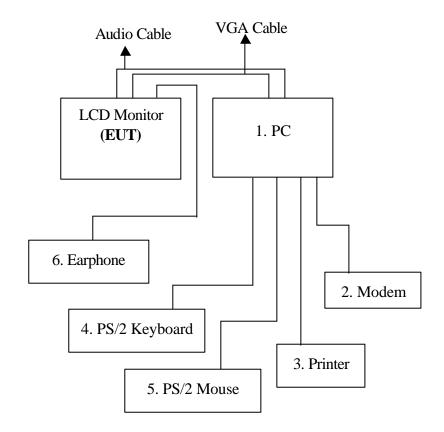

# **APPENDIX 1**

# PHOTOGRAPHS OF TEST SETUP

# LINE CONDUCTED EMISSION TEST

Front View



Back View




# RADIATED EMISSION TEST

### Front View



Back View

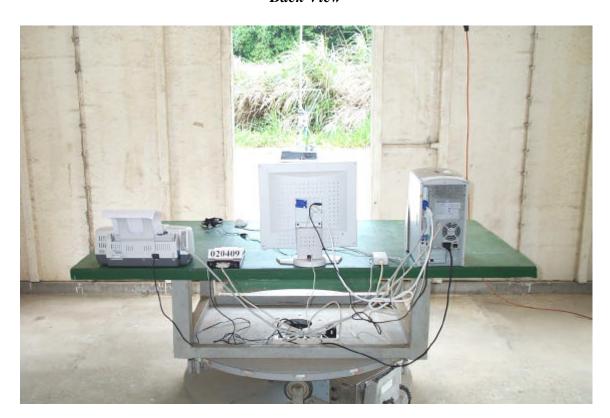

Page 27

# **APPENDIX 2**

# **EXTERNAL OF PHOTOGRAPHS (EUT)**

# **Front View of EUT**



**Back View of EUT** 



# **Left View of EUT**



**Right View of EUT** 



Page 30

# **Bottom View of EUT**



# Front View of AU



Back View of AU



# Front View of HYUNDAI



Back View of HYUNDAI



# Front view of Power Adapter



**Back view of Power Adapter** 



Page 34

