

Acer 34e (14" monitor, 13.1" viewable image)

Installing the Monitor

Product Package


Open the shipping carton and check the contents. If any item is missing or damaged, contact your dealer immediately. The package should include the following items:

- Color monitor
- Power cord
- User's guide
- Swivel base
- Signal cable

Installing the Swivel Base

Follow these steps to install the swivel base:

1. Turn the monitor on its side.
2. Insert the pegs on the swivel base into the cavities at the bottom of the monitor. Push on the swivel base until the latch clicks shut.




Installing the Monitor

Follow these steps to install the monitor:

1. This monitor is equipped with a universal power supply (90-264 VAC) . Before connecting cables, turn OFF the monitor.
2. Plug the 15-pin D-sub signal cable to the video signal connector at the rear of the system.
3. Connect the power cord.

Control Functions

The monitor digital control functions are located on the front panel. Their description are shown in the figure below.

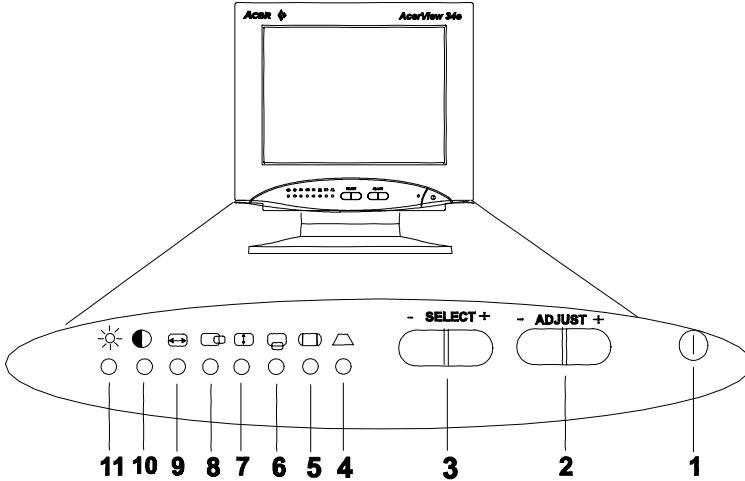

- | | | |
|-----------------|---------------------|--------------------|
| 1. Power Switch | 5. Pincushion | 9. Horizontal Size |
| 2. Adjust | 6. Vertical Center | 10. Contrast |
| 3. Select | 7. Vertical Size | 11. Brightness |
| 4. Trapezoid | 8. Horizontal Phase | |

Select / Adjust

Press the **SELECT** \oplus or \ominus button to cycle through the adjustment options to choose H-Phase, H-Size, V-Center, V-Size, Contrast, Brightness, Trapezoid, and Pincushion. And then press **ADJUST** \oplus or \ominus button to change the settings.

Reset

Reset all settings to factory defaults by pressing both function keys of **SELECT** \oplus and **ADJUST** \ominus .

Display Modes Memory

Our microcontroller feature has the memory capacity to store 24 different display modes, divided into two parts: 16 modes for the user setting area and 8 factory preset display modes

Power Saving Feature

This monitor's power saving feature complies with VESA power saving modes.

Specifications

Picture tube	
Size:	14-inch (35.5 cm) diagonal
Dot pitch:	0.28 mm
Surface/transmission:	Non-glare/semi-tinted
Maximum viewable size	13.1-inch (33.3 cm) diagonal
Video input	15-pin, D-sub connector, analog (positive)
Bandwidth	65 MHz
Display area	260 mm x 195 mm (H x V)
Power supply (Universal)	
Input voltage:	90V~264V / 47~63 Hz
Consumption:	85 watts maximum
External controls	Power switch, brightness, contrast, adjust, select, pincushion, V-size, V-center, H-size, H-phase, trapezoid, reset
Horizontal frequency	30 ~ 54 KHz
Vertical frequency	50 ~ 120 Hz
Dimensions (with stand)	352 mm x 356 mm x 378 mm (W x H x D)

Ambient temperature

Operating: 10°C ~ 40°C

Nonoperating: -40°C ~ 60°C

Humidity

Operating: 20% ~ 90%


Storage: 10% ~ 90%

X-Radiation DHHS, PTB

Regulatory Compliance FCC-B, UL, CSA, BZT-B, CE, TÜV, D.N.S.F, VCCI, MPRII (Optional), ISO9241-3

Factory Preset Display Modes

Mode	Resolution	V. Frequency	H. Frequency
INDUSTRY	640 × 400	70 Hz	31.50 KHz
INDUSTRY	640 × 480	60 Hz	31.50 KHz
INDUSTRY	640 × 480	75 Hz	37.50 KHz
VESA	800 × 600	75 Hz	46.90 KHz
VESA	800 × 600	85 Hz	53.70 KHz
VESA	1024 × 768	60 Hz	48.30 KHz

 Besides above factory preset display modes, this monitor can display the horizontal frequency from 31KHz to 54KHz. And the manual alignment will be needed in some cases out of preset modes.