



# Altos R520 Installation Configuration Guide

---

## Abstract

This document provides you a quick OS installation guide on Altos R520, including Windows Server 2008, Windows Server 2008 x64, Windows Server 2003, Windows Server 2003 x64, Windows 2000, Red Hat Enterprise Linux 4.0 (32-bit & 64-bit), Red Hat Enterprise Linux 5.0 (32-bit & 64-bit), SuSE Linux Enterprise Server 9 (32-bit & 64-bit), SuSE Linux Enterprise Server 10 (32-bit & 64-bit), NetWare 6.5 and VMware ESX Server 3.5.

*Version: 1.4*

*December 2008*

© 2006 Acer Incorporation. All rights reserved.

*This paper is for informational purposes only. ACER MAKES NO WARRANTIES, EXPRESS OR IMPLIED, IN THIS DOCUMENT.*

*Acer, Acer Altos are registered trademarks or trademarks of Acer Incorporation.*

*Other product or company names mentioned herein may be the trademarks of their respective owners.*

---

## CONTENTS

<b>INTRODUCTION.....</b>	<b>1</b>
Where Can I Download the Latest Altos R520 Installation Configuration Guide	1
<b>HARDWARE SPECIFICATION .....</b>	<b>2</b>
<b>BOARD LAYOUT .....</b>	<b>4</b>
System Block Diagram	4
<b>DIMM POPULATION GUIDELINE .....</b>	<b>5</b>
Memory population	5
Memory population with mirroring	5
Memory population with Sparing	5
<b>OS INSTALLATION TIPS .....</b>	<b>6</b>
Windows Server 2008 Enterprise x64 Edition Installation (with integrated SAS hardware RAID)	7
BIOS Required	7
Drivers Required	7
Software Required	7
Configuring integrated SAS hardware RAID	7
Installation Tips	7
Chipset Driver Installation	8
Gigabit Ethernet Driver Installation	8
IOAT Driver Installation	9
VGA Driver Installation	9
RAID Utility Installation	9
Network Utility Installation	9
Windows Server 2008 Enterprise x64 Edition Installation (with integrated SAS hardware RAID 2)	9
BIOS Required	9
Drivers Required	9
Software Required	10
Configuring integrated SAS hardware RAID 2	10
Installation Tips	10
Chipset Driver Installation	11
Gigabit Ethernet Driver Installation	11
IOAT Driver Installation	11
VGA Driver Installation	12
RAID Utility Installation	12
Network Utility Installation	12
Windows Server 2008 Enterprise x64 Edition Installation (with integrated SAS SW RAID)	12
BIOS Required	12
Drivers Required	12
Software Required	13

---

Configuring integrated SAS hardware RAID	13
Installation Tips	13
Chipset Driver Installation	14
Gigabit Ethernet Driver Installation	14
IOAT Driver Installation	14
VGA Driver Installation	15
RAID Utility Installation	15
Network Utility Installation	15
Windows Server 2008 Enterprise x64 Edition Installation (with onboard SATA RAID)	15
BIOS Required	15
Drivers Required	15
Software Required	16
Configuring onboard SATA RAID	16
Installation Tips	16
Chipset Driver Installation	17
Gigabit Ethernet Driver Installation	17
IOAT Driver Installation	17
VGA Driver Installation	18
RAID Utility Installation	18
Network Utility Installation	18
Windows Server 2008 Enterprise Edition Installation (with integrated SAS hardware RAID)	18
BIOS Required	18
Drivers Required	18
Software Required	19
Configuring integrated SAS hardware RAID	19
Installation Tips	19
Chipset Driver Installation	20
Gigabit Ethernet Driver Installation	20
IOAT Driver Installation	20
VGA Driver Installation	21
RAID Utility Installation	21
Network Utility Installation	21
Windows Server 2008 Enterprise Edition Installation (with integrated SAS hardware RAID 2)	21
BIOS Required	21
Drivers Required	21
Software Required	22
Configuring integrated SAS hardware RAID 2	22
Installation Tips	22
Chipset Driver Installation	23
Gigabit Ethernet Driver Installation	23
IOAT Driver Installation	23
VGA Driver Installation	24
RAID Utility Installation	24

---

Network Utility Installation	24
Windows Server 2008 Enterprise Edition Installation (with integrated SAS SW RAID)	24
BIOS Required	24
Drivers Required	24
Software Required	25
Configuring integrated SAS SW RAID	25
Installation Tips	25
Chipset Driver Installation	26
Gigabit Ethernet Driver Installation	26
IOAT Driver Installation	26
VGA Driver Installation	27
RAID Utility Installation	27
Network Utility Installation	27
Windows Server 2008 Enterprise Edition Installation (with onboard SATA RAID)	27
BIOS Required	27
Drivers Required	27
Software Required	28
Configuring onboard SATA RAID	28
Installation Tips	28
Chipset Driver Installation	29
Gigabit Ethernet Driver Installation	29
IOAT Driver Installation	29
VGA Driver Installation	30
RAID Utility Installation	30
Network Utility Installation	30
Windows Server 2003 Enterprise x64 Edition Installation (with integrated SAS hardware RAID)	30
Drivers Required	30
Software Required	30
Configuring integrated SAS hardware RAID	31
Installation Tips	31
Chipset Driver Installation	31
Gigabit Ethernet Driver Installation	32
IOAT Driver Installation	33
Hot-swap Backplane Driver Installation	33
VGA Driver Installation	33
Microsoft Scalable Networking Pack Installation	34
RAID Utility Installation	34
Network Utility Installation	34
Windows Server 2003 Enterprise x64 Edition Installation (with integrated SAS hardware RAID 2)	34
Drivers Required	34
Software Required	35
Configuring integrated SAS hardware RAID 2	35

---

Installation Tips	35
Chipset Driver Installation	35
Gigabit Ethernet Driver Installation	36
IOAT Driver Installation	37
Hot-swap Backplane Driver Installation	37
VGA Driver Installation	37
Microsoft Scalable Networking Pack Installation	38
RAID Utility Installation	38
Network Utility Installation	38
Windows Server 2003 Enterprise x64 Edition Installation (with integrated SAS SW RAID)	38
Drivers Required	38
Software Required	39
Configuring integrated SAS hardware RAID	39
Installation Tips	39
Chipset Driver Installation	39
Gigabit Ethernet Driver Installation	40
IOAT Driver Installation	41
VGA Driver Installation	41
Microsoft Scalable Networking Pack Installation	41
RAID Utility Installation	41
Network Utility Installation	42
Windows Server 2003 Enterprise x64 Edition Installation (with onboard SATA RAID)	42
Drivers Required	42
Software Required	42
Configuring onboard SATA RAID	43
Installation Tips	43
Chipset Driver Installation	43
Gigabit Ethernet Driver Installation	44
IOAT Driver Installation	44
VGA Driver Installation	44
Microsoft Scalable Networking Pack Installation	45
RAID Utility Installation	45
Network Utility Installation	45
Windows Server 2003 Enterprise Edition SP1 Installation (with integrated SAS hardware RAID)	45
Drivers Required	45
Software Required	46
Configuring integrated SAS hardware RAID	46
Installation Tips	46
Chipset Driver Installation	46
Gigabit Ethernet Driver Installation	47
IOAT Driver Installation	48
Hot-swap Backplane Driver Installation	48
VGA Driver Installation	48

---

Microsoft Scalable Networking Pack Installation	49
RAID Utility Installation	49
Network Utility Installation	49
Windows Server 2003 Enterprise Edition SP1 Installation (with integrated SAS hardware RAID 2)	49
Drivers Required	49
Software Required	50
Configuring integrated SAS hardware RAID 2	50
Installation Tips	50
Chipset Driver Installation	50
Gigabit Ethernet Driver Installation	51
IOAT Driver Installation	52
Hot-swap Backplane Driver Installation	52
VGA Driver Installation	52
Microsoft Scalable Networking Pack Installation	53
RAID Utility Installation	53
Network Utility Installation	53
Windows Server 2003 Enterprise Edition SP1 Installation (with integrated SAS SW RAID)	53
Drivers Required	53
Software Required	54
Configuring integrated SAS SW RAID	54
Installation Tips	54
Chipset Driver Installation	54
Gigabit Ethernet Driver Installation	55
IOAT Driver Installation	56
VGA Driver Installation	56
Microsoft Scalable Networking Pack Installation	56
RAID Utility Installation	56
Network Utility Installation	57
Windows Server 2003 Enterprise Edition SP1 Installation (with onboard SATA RAID)	57
Drivers Required	57
Software Required	57
Configuring onboard SATA RAID	57
Installation Tips	58
Chipset Driver Installation	58
Gigabit Ethernet Driver Installation	59
IOAT Driver Installation	59
VGA Driver Installation	59
Microsoft Scalable Networking Pack Installation	60
RAID Utility Installation	60
Network Utility Installation	60
Windows 2000 Advanced Server SP4 Installation (with integrated SAS hardware RAID)	60
Drivers Required	60

---

Software Required	61
Configuring integrated SAS hardware RAID	61
Installation Tips	61
Chipset Driver Installation	61
Gigabit Ethernet Driver Installation	62
IOAT Driver Installation	63
Hot-swap Backplane Driver Installation	63
VGA Driver Installation	63
RAID Utility Installation	64
Network Utility Installation	64
Windows 2000 Advanced Server SP4 Installation (with integrated SAS hardware RAID 2)	64
Drivers Required	64
Software Required	64
Configuring integrated SAS hardware RAID 2	65
Installation Tips	65
Chipset Driver Installation	65
Gigabit Ethernet Driver Installation	66
IOAT Driver Installation	66
Hot-swap Backplane Driver Installation	66
VGA Driver Installation	67
RAID Utility Installation	67
Network Utility Installation	67
Windows 2000 Advanced Server SP4 Installation (with integrated SAS SW RAID)	67
Drivers Required	68
Software Required	68
Configuring integrated SAS SW RAID	68
Installation Tips	68
Chipset Driver Installation	68
Gigabit Ethernet Driver Installation	69
IOAT Driver Installation	69
VGA Driver Installation	70
RAID Utility Installation	70
Network Utility Installation	70
Windows 2000 Advanced Server SP4 Installation (with onboard SATA RAID)	70
Drivers Required	71
Software Required	71
Configuring onboard SATA RAID	71
Installation Tips	71
Chipset Driver Installation	71
Gigabit Ethernet Driver Installation	72
IOAT Driver Installation	72
VGA Driver Installation	73
RAID Utility Installation	73
Network Utility Installation	73



---

Red Hat Enterprise Linux 5.0 EM64T Installation (with integrated SAS hardware RAID)	73
Drivers Required	74
Software Required	74
Configuring integrated SAS hardware RAID	74
Installation Tips	74
Gigabit Ethernet Driver Installation	75
IOAT driver installation	75
RAID Utility Installation	76
Red Hat Enterprise Linux 5.0 EM64T Installation (with integrated SAS hardware RAID 2)	76
Drivers Required	76
Software Required	77
Configuring integrated SAS hardware RAID 2	77
Installation Tips	77
Gigabit Ethernet Driver Installation	77
IOAT driver installation	78
RAID Utility Installation	78
Red Hat Enterprise Linux 5.0 EM64T Installation (with integrated SAS SW RAID)	79
Drivers Required	79
Software Required	79
Configuring integrated SAS hardware RAID	80
Installation Tips	80
Gigabit Ethernet Driver Installation	80
IOAT driver installation	81
RAID Utility Installation	81
Red Hat Enterprise Linux 5.0 EM64T Installation (with Onboard SATA RAID)	82
Drivers Required	82
Software Required	82
Configuring integrated SAS hardware RAID	82
Installation Tips	82
Gigabit Ethernet Driver Installation	83
IOAT driver installation	83
RAID Utility Installation	84
Red Hat Enterprise Linux 5.0 Installation (with integrated SAS hardware RAID)	85
Drivers Required	85
Software Required	85
Configuring integrated SAS hardware RAID	85
Installation Tips	85
Gigabit Ethernet Driver Installation	86
IOAT driver installation	86
RAID Utility Installation	87
Red Hat Enterprise Linux 5.0 Installation (with integrated SAS hardware RAID 2)	87

---

Drivers Required	87
Software Required	88
Configuring integrated SAS hardware RAID 2	88
Installation Tips	88
Gigabit Ethernet Driver Installation	88
IOAT driver installation	89
RAID Utility Installation	90
Red Hat Enterprise Linux 5.0 Installation (with integrated SAS SW RAID)	90
Drivers Required	90
Software Required	91
Configuring integrated SAS hardware RAID	91
Installation Tips	91
Gigabit Ethernet Driver Installation	91
IOAT driver installation	92
RAID Utility Installation	92
Red Hat Enterprise Linux 5.0 Installation (with Onboard SATA RAID)	93
Drivers Required	93
Software Required	93
Configuring integrated SAS hardware RAID	93
Installation Tips	94
Gigabit Ethernet Driver Installation	94
IOAT driver installation	95
RAID Utility Installation	95
Red Hat Enterprise Linux 4.0 EM64T Update 3 Installation (with integrated SAS hardware RAID)	96
Drivers Required	96
Software Required	96
Configuring integrated SAS hardware RAID	96
Installation Tips	96
Gigabit Ethernet Driver Installation	97
RAID Utility Installation	97
Red Hat Enterprise Linux 4.0 EM64T Update 3 Installation (with integrated SAS hardware RAID 2)	98
Drivers Required	98
Software Required	98
Configuring integrated SAS hardware RAID 2	98
Installation Tips	98
Gigabit Ethernet Driver Installation	99
RAID Utility Installation	99
Red Hat Enterprise Linux 4.0 EM64T Update 3 Installation (with integrated SAS SW RAID)	100
Drivers Required	100
Software Required	100
Configuring integrated SAS SW RAID	100
Installation Tips	100
Gigabit Ethernet Driver Installation	101

---

RAID Utility Installation	101
Red Hat Enterprise Linux 4.0 EM64T Update 3 Installation (with onboard SATA RAID)	102
Drivers Required	102
Software Required	102
Configuring onboard SATA RAID	102
Installation Tips	102
Gigabit Ethernet Driver Installation	103
RAID Utility Installation	103
Red Hat Enterprise Linux 4.0 Update 3 Installation (with integrated SAS hardware RAID)	104
Drivers Required	104
Software Required	104
Configuring integrated SAS hardware RAID	104
Installation Tips	104
Gigabit Ethernet Driver Installation	105
RAID Utility Installation	105
Red Hat Enterprise Linux 4.0 Update 3 Installation (with integrated SAS hardware RAID 2)	106
Drivers Required	106
Software Required	106
Configuring integrated SAS hardware RAID 2	106
Installation Tips	106
Gigabit Ethernet Driver Installation	107
RAID Utility Installation	107
Red Hat Enterprise Linux 4.0 Update 3 Installation (with integrated SAS SW RAID)	108
Drivers Required	108
Software Required	108
Configuring integrated SAS SW RAID	108
Installation Tips	108
Gigabit Ethernet Driver Installation	109
RAID Utility Installation	109
Red Hat Enterprise Linux 4.0 Update 3 Installation (with onboard SATA RAID)	110
Drivers Required	110
Software Required	110
Configuring onboard SATA RAID	110
Installation Tips	110
Gigabit Ethernet Driver Installation	111
RAID Utility Installation	111
SUSE Linux Enterprise Server 10 EM64T Installation (with integrated SAS hardware RAID)	111
Drivers Required	112
Software Required	112
Configuring integrated SAS hardware RAID	112

---

Installation Tips	112
Gigabit Ethernet Driver Installation	113
IOAT driver installation	114
RAID Utility Installation	115
SUSE Linux Enterprise Server 10 EM64T Installation (with integrated SAS hardware RAID 2)	115
Drivers Required	115
Software Required	115
Configuring integrated SAS hardware RAID 2	116
Installation Tips	116
Gigabit Ethernet Driver Installation	117
IOAT driver installation	118
RAID Utility Installation	118
SUSE Linux Enterprise Server 10 EM64T Installation (with integrated SAS SW RAID)	119
Drivers Required	119
Software Required	119
Configuring integrated SAS SW RAID	119
Installation Tips	119
Gigabit Ethernet Driver Installation	120
IOAT driver installation	121
RAID Utility Installation	121
SUSE Linux Enterprise Server 10 EM64T Installation (with onboard SATA RAID)	122
Drivers Required	122
Software Required	122
Configuring onboard SATA RAID	122
Installation Tips	123
Gigabit Ethernet Driver Installation	124
IOAT driver installation	124
RAID Utility Installation	125
SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation (with integrated SAS hardware RAID)	125
Drivers Required	125
Software Required	126
Configuring integrated SAS hardware RAID	126
Installation Tips	126
Gigabit Ethernet Driver Installation	126
RAID Utility Installation	127
SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation (with integrated SAS hardware RAID 2)	127
Drivers Required	127
Software Required	128
Configuring integrated SAS hardware RAID 2	128
Installation Tips	128
Gigabit Ethernet Driver Installation	129

---

RAID Utility Installation	129
SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation (with integrated SAS SW RAID)	129
Drivers Required	130
Software Required	130
Configuring integrated SAS SW RAID	130
Installation Tips	130
Gigabit Ethernet Driver Installation	131
RAID Utility Installation	131
SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation (with onboard SATA RAID)	132
Drivers Required	132
Software Required	132
Configuring onboard SATA RAID	132
Installation Tips	132
Gigabit Ethernet Driver Installation	133
RAID Utility Installation	133
SUSE Linux Enterprise Server 10 Installation (with integrated SAS hardware RAID)	134
Drivers Required	134
Software Required	134
Configuring integrated SAS hardware RAID	134
Installation Tips	134
Gigabit Ethernet Driver Installation	136
IOAT driver installation	136
RAID Utility Installation	137
SUSE Linux Enterprise Server 10 Installation (with integrated SAS hardware RAID 2)	137
Drivers Required	137
Software Required	138
Configuring integrated SAS hardware RAID 2	138
Installation Tips	138
Gigabit Ethernet Driver Installation	139
IOAT driver installation	140
RAID Utility Installation	140
SUSE Linux Enterprise Server 10 Installation (with integrated SAS SW RAID)	141
Drivers Required	141
Software Required	141
Configuring integrated SAS SW RAID	141
Installation Tips	141
Gigabit Ethernet Driver Installation	142
IOAT driver installation	143
RAID Utility Installation	143
SUSE Linux Enterprise Server 10 Installation (with onboard SATA RAID)	144
Drivers Required	144
Software Required	144

---

Configuring onboard SATA RAID	144
Installation Tips	145
Gigabit Ethernet Driver Installation	146
IOAT driver installation	146
RAID Utility Installation	147
SUSE Linux Enterprise Server 9 Service Pack 3 Installation (with integrated SAS hardware RAID)	147
Drivers Required	147
Software Required	148
Configuring integrated SAS hardware RAID	148
Installation Tips	148
Gigabit Ethernet Driver Installation	149
RAID Utility Installation	149
SUSE Linux Enterprise Server 9 Service Pack 3 Installation (with integrated SAS hardware RAID 2)	149
Drivers Required	150
Software Required	150
Configuring integrated SAS hardware RAID 2	150
Installation Tips	150
Gigabit Ethernet Driver Installation	151
RAID Utility Installation	151
SUSE Linux Enterprise Server 9 Service Pack 3 Installation (with integrated SAS SW RAID)	152
Drivers Required	152
Software Required	152
Configuring integrated SAS SW RAID	152
Installation Tips	152
Gigabit Ethernet Driver Installation	153
RAID Utility Installation	153
SUSE Linux Enterprise Server 9 Service Pack 3 Installation (with onboard SATA RAID)	154
Drivers Required	154
Software Required	154
Configuring onboard SATA RAID	154
Installation Tips	154
Gigabit Ethernet Driver Installation	155
RAID Utility Installation	155
NetWare 6.5 SP5 Installation (with integrated SAS hardware RAID)	156
Drivers Required	156
Configuring integrated SAS hardware RAID	156
Installation Tips	156
NetWare 6.5 SP5 Installation (with integrated SAS hardware RAID 2)	158
Drivers Required	158
Configuring integrated SAS hardware RAID 2	158
Installation Tips	158
VMware ESX Server 3.5 (with integrated SAS hardware RAID)	159

---

Drivers Required	159
Configuring integrated SAS hardware RAID	160
Installation Tips	160
Downloading the VMware Infrastructure Client	160
VMware Infrastructure Client Installation on Windows	161

**APPENDIX A: INTEGRATED SAS HARDWARE RAID CREATION ..... 163**

Configuring integrated SAS hardware RAID	163
Load BIOS default setting	163
Enter the integrated SAS hardware RAID Configuration Utility	163
Loading Factory Default Setting	163
Creating and Initialing a RAID Volume	163
Assigning a Hot Spare Disk	164

**APPENDIX B: INTEGRATED SAS SW RAID CREATION ..... 165**

Configuring the integrated SAS SW RAID	165
Load BIOS default setting	165
Enable integrated SAS SW RAID function	165
Enter the integrated SAS SW RAID Configuration Utility	165
Loading integrated SAS SW RAID default setting	165
Create RAID 1 volume	165
Initial RAID Volume	166
Save and Exit Embedded RAID II Configuration Utility	166

**APPENDIX C: ONBOARD SATA RAID CREATION ..... 167**

Configuring the onboard SATA RAID	167
Load BIOS default setting	167
Enable onboard SATA RAID function	167
Enter the onboard SATA RAID Configuration Utility	167
Loading onboard SATA RAID default setting	167
Create RAID 1 volume	167
Initial RAID Volume	168
Save and Exit Embedded RAID II Configuration Utility	168

**APPENDIX D: INTEGRATED SAS HARDWARE RAID 2 CREATION .. 169**

Configuring integrated SAS hardware RAID 2	169
Load BIOS default setting	169
Enter the integrated SAS hardware RAID 2 Configuration Utility	169
Loading Factory Default Setting	169
Creating and Initialing a RAID Volume	169
Assigning a Hot Spare Disk	170

---





---

## **INTRODUCTION**

This article describes the Altos R520 Installation Configuration guide:

- Hardware parts give you a briefly and quick hardware information about Altos R520
- The operating system installation tips.

### **Where Can I Download the Latest Altos R520 Installation Configuration Guide**

The Altos R520 Installation Configuration Guide would be updated on a monthly basis. Please download the latest release from the Acer Support web site.


## HARDWARE SPECIFICATION

<b>Model</b>	Altos R520
<b>Processor</b>	<ul style="list-style-type: none"> <li>• Dual-Core Intel Xeon processors 5000/5100/5200 sequence (Dempsey, Woodcrest or Wolfdale-DP) at 1.86Hz or above Frequency</li> <li>• Quad-Core Intel Xeon processors 5300/5400 sequence (Clovertown or Harpertown) at 1.60Hz or above Frequency</li> </ul>
<b>Front Side Bus</b>	<ul style="list-style-type: none"> <li>• 667MHz</li> <li>• 1066MHz</li> <li>• 1333MHz</li> </ul>
<b>Cache</b>	<ul style="list-style-type: none"> <li>• 2 x 2MB L2 cache</li> <li>• 4MB L2 cache</li> <li>• 2 x 4MB L2 cache</li> </ul>
<b>Chipset</b>	<p>Intel chipset</p> <ul style="list-style-type: none"> <li>• North Bridge: Intel 5000P (Blackford)</li> <li>• South Bridge: Intel 6321ESB</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>• Quad FB-DIMM memory channels</li> <li>• 8 x DIMM sockets support 512MB/1GB/2GB FB-DIMM 533 or FB-DIMM 667</li> <li>• Maximum memory of 32GB (when 4GB DIMM is available)</li> <li>• Up to 17 GB/s maximum b/w for FB-DIMM 533</li> <li>• Up to 21 GB/s maximum b/w for FB-DIMM 677</li> <li>• Support memory sparing and memory mirroring</li> </ul>
<b>Storage Interface</b>	<ul style="list-style-type: none"> <li>• LSI SAS 1068/1078 3Gb/s SAS controller</li> <li>• Six SATA ports</li> <li>• One ATA-100 port</li> </ul>
<b>Expansion Slots</b>	<p>Total 2 slots (one full height slot, one low profile slot)</p> <p>Low profile riser slot</p> <ul style="list-style-type: none"> <li>• One x8 PCI-Express slot</li> </ul> <p>Full height riser slot</p> <ul style="list-style-type: none"> <li>• Option 1: One PCI-Express x8 slot</li> <li>• Option 2: One 64-bits/133MHz/3.3V PCI-X slot</li> </ul>
<b>VGA</b>	Onboard ATI ES1000 video controller w/ 16MB SDRAM
<b>SAS Controller</b>	<p>Integrated SAS hardware RAID</p> <ul style="list-style-type: none"> <li>• RAID 0, 1, 5, 10 and 50 support</li> <li>• 128MB or 256MB of cache (DDR2 400 registered, 244 pin Mini DIMM)</li> <li>• BBU support</li> </ul>

	<p>Integrated SAS hardware RAID 2</p> <ul style="list-style-type: none"> <li>RAID 0, 1, 5, 6, 10, 50 and 60 support</li> <li>512MB of cache (DDR2 667 registered, 244 pin Mini DIMM)</li> <li>BBU support</li> </ul>
<b>SATA Controller</b>	<ul style="list-style-type: none"> <li>Six SATA ports with RAID 0, 1, 10 support</li> <li>Optional RAID 5 support with activation key</li> </ul>
<b>LAN Controller</b>	<ul style="list-style-type: none"> <li>Onboard Intel 82563EB dual-channel gigabit network interface controller</li> <li>Supporting Intel I/O Acceleration Technology</li> </ul>
<b>BMC</b>	<p>BMC (Baseboard Management Controller)</p> <ul style="list-style-type: none"> <li>IPMI 2.0 compliant</li> </ul> <p>Option</p> <ul style="list-style-type: none"> <li>Can be upgraded to Intel Remote Management Module with Virtual Media and remote KVM support</li> </ul>
<b>Availability sub-system</b>	
<b>System Power Supply</b>	<ul style="list-style-type: none"> <li>1+1 redundant 650W power supply</li> <li>Hot Swap</li> </ul>
<b>Storage Subsystem</b>	
<b>Drive Bays</b>	<ul style="list-style-type: none"> <li>Six front accessible drive bay for 2.5" SAS/SATA HDD</li> <li>Optional front accessible bay space for 7th, 8th HDD bay</li> </ul>
<b>Hard Disks</b>	<ul style="list-style-type: none"> <li>Up to 8 SAS/SATA 2.5" HDD (without standard control panel or dummy cover installed)</li> <li>Only support 6 SAS/SATA 2.5" HDD when standard control panel or dummy cover installed</li> </ul>

# BOARD LAYOUT

# System Block Diagram

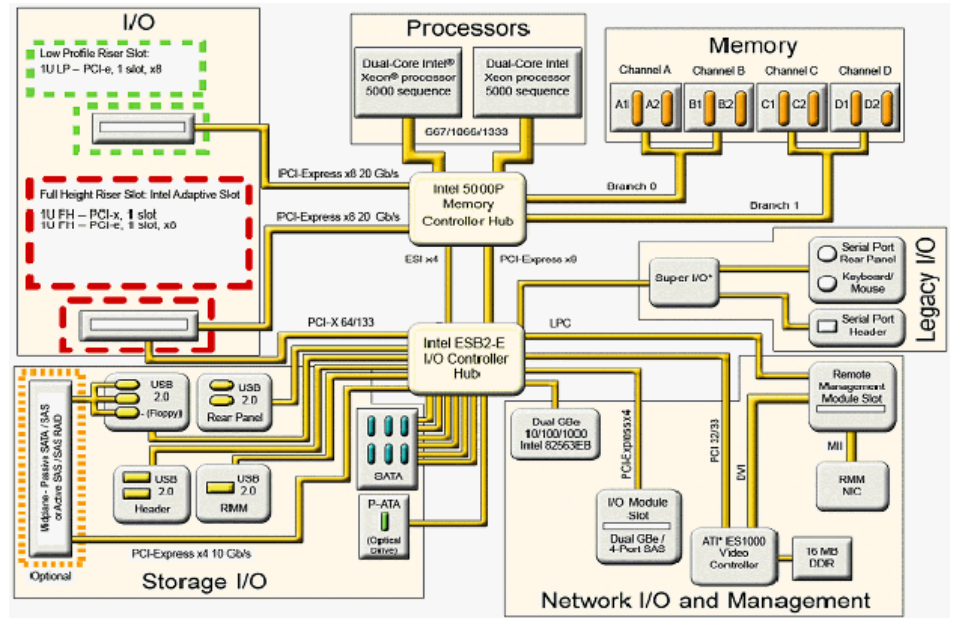

## DIMM POPULATION GUIDELINE

### Memory population

#	Branch 0				Branch 1			
	DIMM A1	DIMM A2	DIMM B1	DIMM B2	DIMM C1	DIMM C2	DIMM D1	DIMM D2
1	512 MB							
2	512 MB		512 MB					
3	512 MB		512 MB		512 MB		512 MB	
4	512 MB	512 MB	512 MB	512 MB	512 MB		512 MB	
5	512 MB	512 MB	512 MB	512 MB	512 MB	512 MB	512 MB	512 MB
6	1 GB							
7	1 GB		1 GB					
8	1 GB		1 GB		1 GB		1 GB	
9	1 GB	1 GB	1 GB	1 GB	1 GB		1 GB	
10	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB
11	2 GB							
12	2 GB		2 GB					
13	2 GB		2 GB		2 GB		2 GB	
14	2 GB	2 GB	2 GB	2 GB	2 GB		2 GB	
15	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB

### Memory population with mirroring

#	Branch 0				Branch 1				Total Memory	
	DIMM A1	DIMM A2	DIMM B1	DIMM B2	DIMM C1	DIMM C2	DIMM D1	DIMM D2	Physical Memory	Detected by OS
1	512 MB		512 MB		512 MB (Mirror)		512 MB (Mirror)		2 GB	1 GB
2	512 MB	512 MB	512 MB	512 MB	512 MB (Mirror)	512 MB (Mirror)	512 MB (Mirror)	512 MB (Mirror)	4 GB	2 GB
3	1 GB		1 GB		1 GB (Mirror)		1 GB (Mirror)		4 GB	2 MB
4	1 GB	1 GB	1 GB	1 GB	1 GB (Mirror)	1 GB (Mirror)	1 GB (Mirror)	1 GB (Mirror)	8 GB	4 GB
5	2 GB		2 GB		2 GB (Mirror)		2 GB (Mirror)		8 GB	4 GB
6	2 GB	2 GB	2 GB	2 GB	2 GB (Mirror)	2 GB (Mirror)	2 GB (Mirror)	2 GB (Mirror)	16 GB	8 GB

### Memory population with Sparing

#	Branch 0				Branch 1				Total Memory	
	DIMM A1	DIMM A2	DIMM B1	DIMM B2	DIMM C1	DIMM C2	DIMM D1	DIMM D2	Physical Memory	Detected by OS
1	512 MB (Sparing)	512 MB							1 GB	512 MB
2	512 MB (Sparing)	512 MB	512 MB (Sparing)	512 MB					2 GB	1 GB
3	512 MB (Sparing)	512 MB	512 MB (Sparing)	512 MB	512 MB (Sparing)	512 MB	512 MB (Sparing)	512 MB	4 GB	2 GB
4	1 GB (Sparing)	1 GB							2 GB	1 GB
5	1 GB (Sparing)	1 GB	1 GB (Sparing)	1 GB					4 GB	2 GB
6	1 GB (Sparing)	1 GB	1 GB (Sparing)	1 GB	1 GB (Sparing)	1 GB	1 GB (Sparing)	1 GB	8 GB	4 GB
7	2 GB (Sparing)	2 GB							4 GB	2 GB
8	2 GB (Sparing)	2 GB	2 GB (Sparing)	2 GB					8 GB	4 GB
9	2 GB (Sparing)	2 GB	2 GB (Sparing)	2 GB	2 GB (Sparing)	2 GB	2 GB (Sparing)	2 GB	16 GB	8 GB

## OS INSTALLATION TIPS

Below is Altos R520 OS certification matrix:

Operating System	Service Pack	Status	Note
Windows Server 2008 Enterprise Edition	n/a	Certified	1, 2, 3
Windows Server 2008 Enterprise x64 Edition	n/a	Certified	1, 2, 3
Windows Server 2003 Enterprise Edition	SP2	Certified	
	SP1		
Windows Server 2003 Enterprise x64 Edition	SP2	Certified	
	SP1		
Windows 2000 Advanced Server	SP4	Installation Tested	
Red Hat Enterprise Linux 4.0	Update 3	Certified	
Red Hat Enterprise Linux 4.0 EM64T	Update 3	Certified	
Red Hat Enterprise Linux 5	n/a	Certified	
Red Hat Enterprise Linux 5 EM64T	n/a	Certified	
SuSE Linux Enterprise Server 9	SP3	Certified	
SuSE Linux Enterprise Server 9 EM64T	SP3	Certified	
SuSE Linux Enterprise Server 10	n/a	Certified	
SuSE Linux Enterprise Server 10 EM64T	n/a	Certified	
NetWare 6.5	SP5	Certified	

NOTE1. Altos R520 BIOS [P88](#) (or later), BMC [63](#) (or later) and FRUSDR [47](#) (or later) are required to support Windows Server 2008.

NOTE2. This Windows Server 2008 certification also applies to Standard Edition and Web Server 2008.

NOTE3. EasyBUILD 8.0 build 200 (or later) can support Windows Server 2008.

The drivers required for the OS installation can be found on the EasyBUILD. We suggest that you use the drivers contained in the EasyBUILD, as these drivers are tested and qualified by Acer.

There are two ways you can get the drivers. You can either make diskettes from EasyBUILD 7.1 build 400 (or later), or put it in the optical drive and search the driver directly.

NOTE. In this section, we assume the OS is installed on the HDD connected to the onboard SATA RAID, integrated SAS SW RAID or integrated SAS hardware RAID.

NOTE. You need an external USB floppy drive to load the driver during the OS installation.

---

## Windows Server 2008 Enterprise x64 Edition Installation (with integrated SAS hardware RAID)

Below information describes how to manually install Windows Server 2008 Enterprise x64 Edition on Altos R520.

### BIOS Required

Altos R520 BIOS [P88](#) (or later), BMC [63](#) (or later) and FRUSDR [47](#) (or later) are required to support Windows Server 2008.

### Drivers Required

For Windows Server 2008 x64 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	2.20.0.64	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.6.0.1002	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.17.0	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	8.240.50.3000	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)
Hot-swap backplane	N/A	OS built-in

### Software Required

The management utility of integrated SAS hardware RAID and NIC can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)

### Configuring integrated SAS hardware RAID


Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

### Installation Tips

NOTE. The Windows Server 2008 x64 can recognize integrated SAS hardware RAID. Please replace the driver with the one provided by EasyBUILD. You need an external USB floppy drive or USB Flash drive to load driver during the OS installation.

1. Please make a driver diskette from the EasyBUILD first before the installation.

2. Click on "Load Driver" when "Where do you want to install Windows" message displayed.
3. Select "Intel(R) RAID Controller SROMBSAS18E (A:\oemsetup.inf)" as target driver
4. After loading the RAID driver from diskette, you could click "Drive options" to partition the drive.
5. Follow the normal procedure to finish the installation.
6. After the installation completes, you would see the following devices with yellow mark in Device Manager.

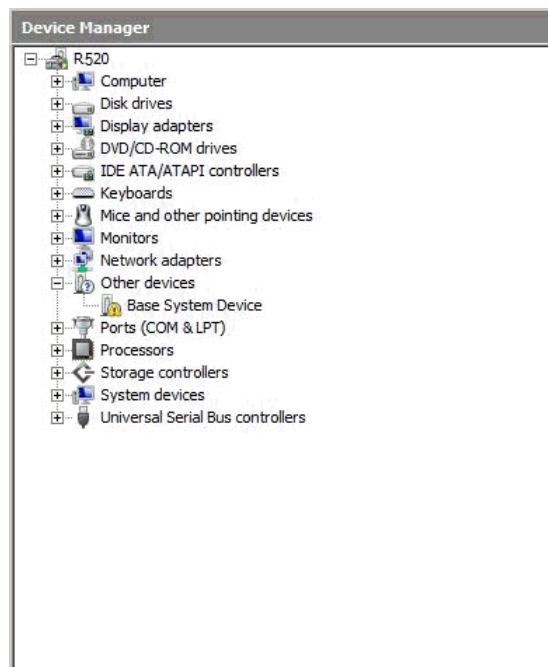

### Chipset Driver Installation

1. Please insert the EasyBUILD into the optical drive
2. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2008 x64** and click on **Setup**.
3. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### Gigabit Ethernet Driver Installation

1. There is built-in Ethernet controller driver with Windows Server 2008 x64. Please update the driver with EasyBUILD. Please do the same on both of the devices.
2. Please insert the EasyBUILD into the optical drive



- 
3. Expand **Drivers** -> **Altos R520** -> **Network adapters** -> **Intel 82563EB Gigabit Ethernet Controller**, select **Windows Server 2008 x64** and click on **Setup**.
  4. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

#### **IOAT Driver Installation**

The Base System Device with yellow mark in Device Manger is the IOAT device. After the Gigabit Ethernet controller driver installation completed at previous step, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

#### **VGA Driver Installation**

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000**, select **Windows Server 2008 x64** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

#### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS hardware RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

#### **Network Utility Installation**

The PROSet utility for the onboard Gigabit Ethernet controller will be installed automatically when you installing the onboard Gigabit Ethernet driver.

### **Windows Server 2008 Enterprise x64 Edition Installation (with integrated SAS hardware RAID 2)**

Below information describes how to manually install Windows Server 2008 Enterprise x64 Edition on Altos R520.

#### **BIOS Required**

Altos R520 BIOS [P88](#) (or later), BMC [63](#) (or later) and FRUSDR [47](#) (or later) are required to support Windows Server 2008.

#### **Drivers Required**

For Windows Server 2008 x64 Installation, the following device drivers are

required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	2.20.0.64	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.6.0.1002	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.17.0	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	8.240.50.3000	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)
Hot-swap backplane	N/A	OS built-in

### Software Required

The management utility of integrated SAS hardware RAID 2 and NIC can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)


### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

### Installation Tips

NOTE. The Windows Server 2008 x64 can recognize integrated SAS hardware RAID 2. Please replace the driver with the one provided by EasyBUILD. You need an external USB floppy drive or USB Flash drive to load driver during the OS installation.

1. Please make a driver diskette from the EasyBUILD first before the installation.
2. Click on "Load Driver" when "Where do you want to install Windows" message displayed.
3. Select "Intel(R) RAID Controller SROMBSASMP2 (A:\oemsetup.inf)" as target driver
4. After loading the RAID driver from diskette, you could click "Drive options" to partition the drive.
5. Follow the normal procedure to finish the installation.
6. After the installation completes, you would see the following devices with yellow mark in Device Manager.

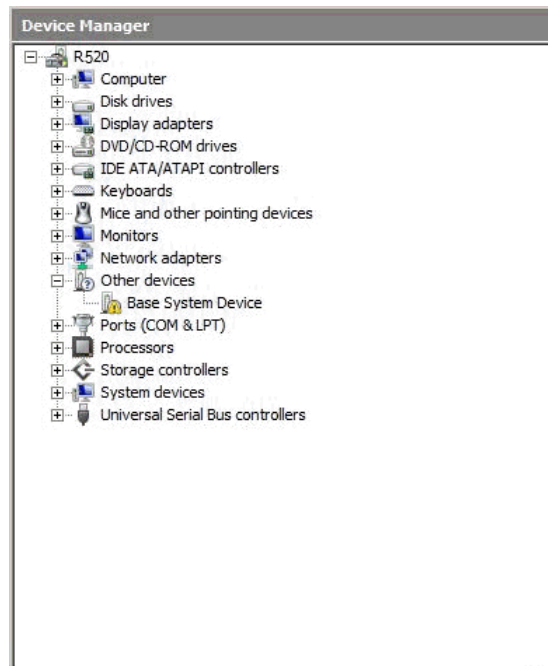

### Chipset Driver Installation

1. Please insert the EasyBUILD into the optical drive
2. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2008 x64** and click on **Setup**.
3. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### Gigabit Ethernet Driver Installation

1. There is built-in Ethernet controller driver with Windows Server 2008 x64. Please update the driver with EasyBUILD. Please do the same on both of the devices.
2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Network adapters** -> **Intel 82563EB Gigabit Ethernet Controller**, select **Windows Server 2008 x64** and click on **Setup**.
4. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

### IOAT Driver Installation

The Base System Device with yellow mark in Device Manager is the IOAT device. After the Gigabit Ethernet controller driver installation completed at previous step, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### VGA Driver Installation

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000**, select **Windows Server 2008 x64** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

### RAID Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS hardware RAID 2**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### Network Utility Installation

The PROSet utility for the onboard Gigabit Ethernet controller will be installed automatically when you installing the onboard Gigabit Ethernet driver.

### Windows Server 2008 Enterprise x64 Edition Installation (with integrated SAS SW RAID)

Below information describes how to manually install Windows Server 2008 Enterprise x64 Edition on Altos R520.

#### BIOS Required

Altos R520 BIOS [P88](#) (or later), BMC [63](#) (or later) and FRUSDR [47](#) (or later) are required to support Windows Server 2008.

#### Drivers Required

For Windows Server 2008 x64 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS SW RAID	09.32.0207.2008	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.6.0.1002	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.17.0	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	8.240.50.3000	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)

---

## Software Required

The management utility of integrated SAS SW RAID and NIC can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)


## Configuring integrated SAS hardware RAID

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

## Installation Tips

NOTE. There is no built-in driver of Integrated SAS SW RAID in the Windows Server 2008 x64. You need an external USB floppy drive or USB Flash drive to load driver during the OS installation.

1. Please make a driver diskette from the EasyBUILD first before the installation.
2. Click on "Load Driver" when "Where do you want to install Windows" message displayed.
3. Select "Intel Embedded Server RAID Technology II (A:\MegaSR.inf)" as target driver
4. After loading the RAID driver from diskette, you could click "Drive options" to partition the drive.
5. Follow the normal procedure to finish the installation.
6. After the installation completes, you would see the following devices with yellow mark in Device Manager.

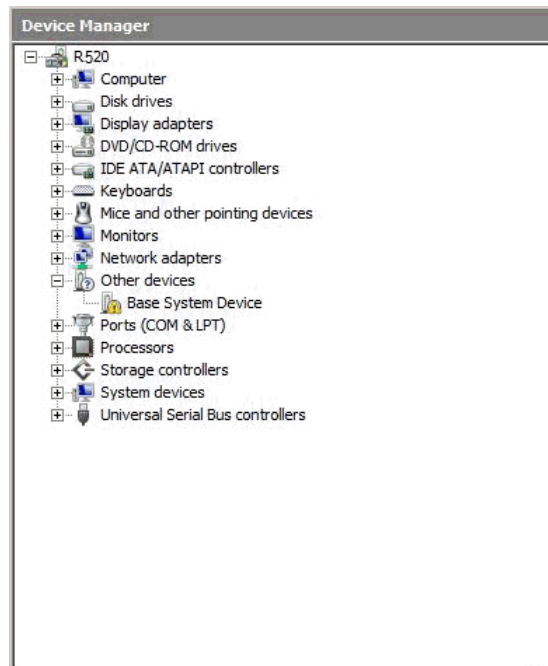

### Chipset Driver Installation

1. Please insert the EasyBUILD into the optical drive
2. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2008 x64** and click on **Setup**.
3. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### Gigabit Ethernet Driver Installation

1. There is built-in Ethernet controller driver with Windows Server 2008 x64. Please update the driver with EasyBUILD. Please do the same on both of the devices.
2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Network adapters** -> **Intel 82563EB Gigabit Ethernet Controller**, select **Windows Server 2008 x64** and click on **Setup**.
4. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

### IOAT Driver Installation

The Base System Device with yellow mark in Device Manager is the IOAT device. After the Gigabit Ethernet controller driver installation completed at previous step, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### VGA Driver Installation

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000**, select **Windows Server 2008 x64** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

### RAID Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS SW RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### Network Utility Installation

The PROSet utility for the onboard Gigabit Ethernet controller will be installed automatically when you installing the onboard Gigabit Ethernet driver.

### Windows Server 2008 Enterprise x64 Edition Installation (with onboard SATA RAID)

Below information describes how to manually install Windows Server 2008 Enterprise x64 Edition on Altos R520.

#### BIOS Required

Altos R520 BIOS [P88](#) (or later), BMC [63](#) (or later) and FRUSDR [47](#) (or later) are required to support Windows Server 2008.

#### Drivers Required

For Windows Server 2008 x64 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
onboard SATA RAID	09.32.0207.2008	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.6.0.1002	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.17.0	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	8.240.50.3000	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)

---

## Software Required

The management utility of onboard SATA RAID and NIC can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)

## Configuring onboard SATA RAID


Please refer to the Appendix C. for the onboard SATA RAID configuration.

### Installation Tips

NOTE. There is no built-in driver of Onboard SATA RAID in the Windows Server 2008 x64. You need an external USB floppy drive or USB Flash drive to load driver during the OS installation.

1. Please make a driver diskette from the EasyBUILD first before the installation.
2. Click on "Load Driver" when "Where do you want to install Windows" message displayed.
3. Select "Intel Embedded Server RAID Technology II (A:\MegaSR.inf)" as target driver
4. After loading the RAID driver from diskette, you could click "Drive options" to partition the drive.
5. Follow the normal procedure to finish the installation.
6. After the installation completes, you would see the following devices with yellow mark in Device Manager.



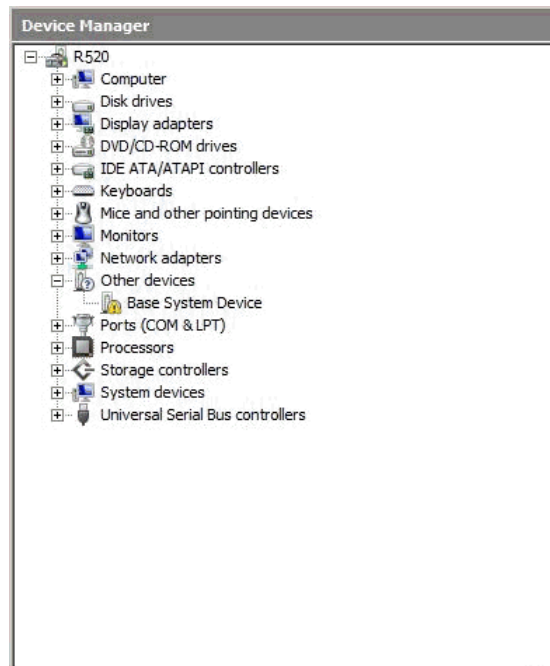

### Chipset Driver Installation

1. Please insert the EasyBUILD into the optical drive
2. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2008 x64** and click on **Setup**.
3. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### Gigabit Ethernet Driver Installation

1. There is built-in Ethernet controller driver with Windows Server 2008 x64. Please update the driver with EasyBUILD. Please do the same on both of the devices.
2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Network adapters** -> **Intel 82563EB Gigabit Ethernet Controller**, select **Windows Server 2008 x64** and click on **Setup**.
4. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

### IOAT Driver Installation

The Base System Device with yellow mark in Device Manager is the IOAT device. After the Gigabit Ethernet controller driver installation completed at previous step, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### VGA Driver Installation

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000**, select **Windows Server 2008 x64** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

### RAID Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Onboard SATA RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### Network Utility Installation

The PROSet utility for the onboard Gigabit Ethernet controller will be installed automatically when you installing the onboard Gigabit Ethernet driver.

### Windows Server 2008 Enterprise Edition Installation (with integrated SAS hardware RAID)

Below information describes how to manually install Windows Server 2008 Enterprise Edition on Altos R520.

#### BIOS Required

Altos R520 BIOS [P88](#) (or later), BMC [63](#) (or later) and FRUSDR [47](#) (or later) are required to support Windows Server 2008.

#### Drivers Required

For Windows Server 2008 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	2.20.0.32	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.6.0.1002	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.17.0	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	8.240.50.3000	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)
Hot-swap backplane	N/A	OS built-in

---

## Software Required

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)


## Configuring integrated SAS hardware RAID

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

## Installation Tips

NOTE. The Windows Server 2008 can recognize integrated SAS hardware RAID. Please replace the driver with the one provided by EasyBUILD. You need an external USB floppy drive or USB Flash drive to load driver during the OS installation.

1. Please make a driver diskette from the EasyBUILD first before the installation.
2. Click on "Load Driver" when "Where do you want to install Windows" message displayed.
3. Select "Intel(R) RAID Controller SROMBSAS18E (A:\oemsetup.inf)" as target driver
4. After loading the RAID driver from diskette, you could click "Drive options" to partition the drive.
5. Follow the normal procedure to finish the installation.
6. After the installation completes, you would see the following devices with yellow mark in Device Manager.

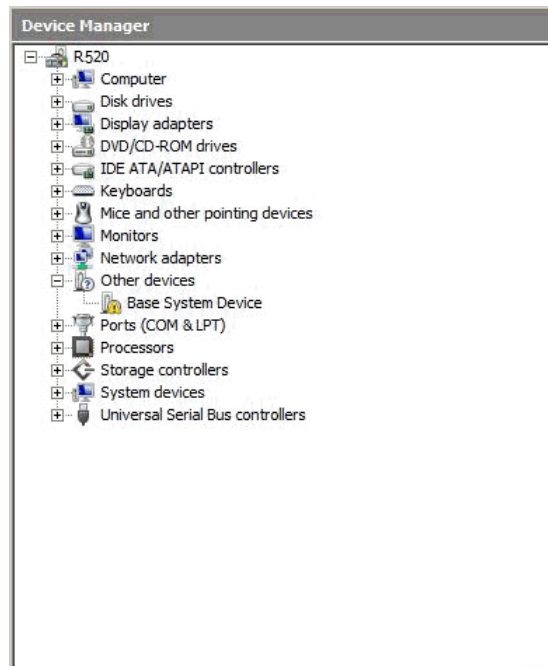

### Chipset Driver Installation

1. Please insert the EasyBUILD into the optical drive
2. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2008** and click on **Setup**.
3. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### Gigabit Ethernet Driver Installation

1. There is built-in Ethernet controller driver with Windows Server 2008. Please update the driver with EasyBUILD. Please do the same on both of the devices.
2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Network adapters** -> **Intel 82563EB Gigabit Ethernet Controller**, select **Windows Server 2008** and click on **Setup**.
4. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

### IOAT Driver Installation

The Base System Device with yellow mark in Device Manager is the IOAT device. After the Gigabit Ethernet controller driver installation completed at previous step, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### VGA Driver Installation

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000**, select **Windows Server 2008** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

### RAID Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS hardware RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### Network Utility Installation

The PROSet utility for the onboard Gigabit Ethernet controller will be installed automatically when you installing the onboard Gigabit Ethernet driver.

### Windows Server 2008 Enterprise Edition Installation (with integrated SAS hardware RAID 2)

Below information describes how to manually install Windows Server 2008 Enterprise Edition on Altos R520.

#### BIOS Required

Altos R520 BIOS [P88](#) (or later), BMC [63](#) (or later) and FRUSDR [47](#) (or later) are required to support Windows Server 2008.

#### Drivers Required

For Windows Server 2008 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	2.20.0.32	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.6.0.1002	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.17.0	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	8.240.50.3000	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)
Hot-swap backplane	N/A	OS built-in

---

## Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)


## Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

### Installation Tips

NOTE. The Windows Server 2008 can recognize integrated SAS hardware RAID 2. Please replace the driver with the one provided by EasyBUILD. You need an external USB floppy drive or USB Flash drive to load driver during the OS installation.

1. Please make a driver diskette from the EasyBUILD first before the installation.
2. Click on "Load Driver" when "Where do you want to install Windows" message displayed.
3. Select "**Intel(R) RAID Controller SROMBSASMP2 (A:\oemsetup.inf)**" as target driver
4. After loading the RAID driver from diskette, you could click "Drive options" to partition the drive.
5. Follow the normal procedure to finish the installation.
6. After the installation completes, you would see the following devices with yellow mark in Device Manager.

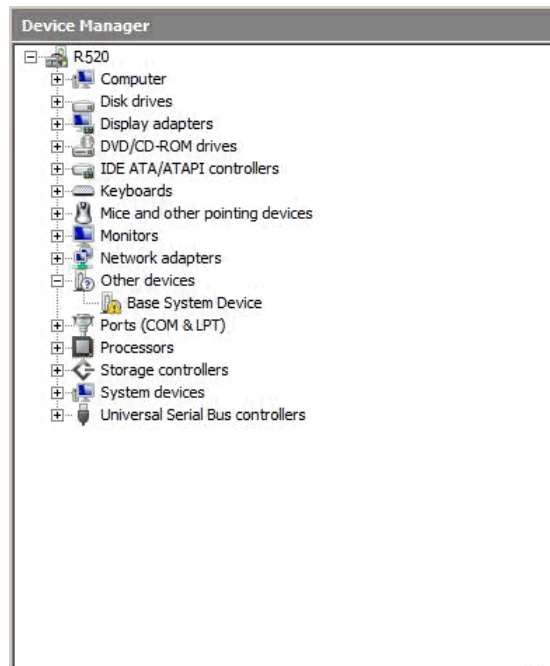

### Chipset Driver Installation

1. Please insert the EasyBUILD into the optical drive
2. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2008** and click on **Setup**.
3. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### Gigabit Ethernet Driver Installation

1. There is built-in Ethernet controller driver with Windows Server 2008. Please update the driver with EasyBUILD. Please do the same on both of the devices.
2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Network adapters** -> **Intel 82563EB Gigabit Ethernet Controller**, select **Windows Server 2008** and click on **Setup**.
4. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

### IOAT Driver Installation

The Base System Device with yellow mark in Device Manager is the IOAT device. After the Gigabit Ethernet controller driver installation completed at previous step, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### VGA Driver Installation

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000**, select **Windows Server 2008** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

### RAID Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS hardware RAID 2**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### Network Utility Installation

The PROSet utility for the onboard Gigabit Ethernet controller will be installed automatically when you installing the onboard Gigabit Ethernet driver.

### Windows Server 2008 Enterprise Edition Installation (with integrated SAS SW RAID)

Below information describes how to manually install Windows Server 2008 Enterprise Edition on Altos R520.

#### BIOS Required

Altos R520 BIOS [P88](#) (or later), BMC [63](#) (or later) and FRUSDR [47](#) (or later) are required to support Windows Server 2008.

#### Drivers Required

For Windows Server 2008 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS SW RAID	09.32.0207.2008	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.6.0.1002	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.17.0	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	8.240.50.3000	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)



---

## Software Required

The management utility of integrated SAS SW RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)


## Configuring integrated SAS SW RAID

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

### Installation Tips

NOTE. There is no built-in driver of Integrated SAS SW RAID in the Windows Server 2008 x64. You need an external USB floppy drive or USB Flash drive to load driver during the OS installation.

1. Please make a driver diskette from the EasyBUILD first before the installation.
2. Click on "Load Driver" when "Where do you want to install Windows" message displayed.
3. Select "Intel Embedded Server RAID Technology II (A:\MegaSR.inf)" as target driver
4. After loading the RAID driver from diskette, you could click "Drive options" to partition the drive.
5. Follow the normal procedure to finish the installation.
6. After the installation completes, you would see the following devices with yellow mark in Device Manager.

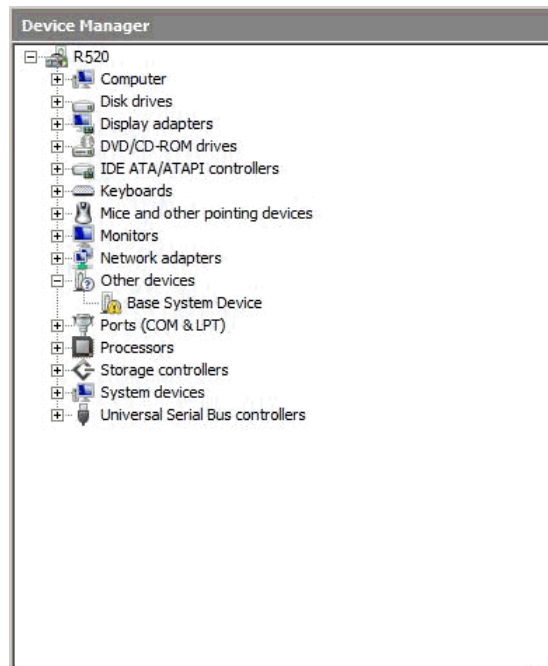

### Chipset Driver Installation

1. Please insert the EasyBUILD into the optical drive
2. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2008** and click on **Setup**.
3. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### Gigabit Ethernet Driver Installation

1. There is built-in Ethernet controller driver with Windows Server 2008. Please update the driver with EasyBUILD. Please do the same on both of the devices.
2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Network adapters** -> **Intel 82563EB Gigabit Ethernet Controller**, select **Windows Server 2008** and click on **Setup**.
4. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

### IOAT Driver Installation

The Base System Device with yellow mark in Device Manager is the IOAT device. After the Gigabit Ethernet controller driver installation completed at previous step, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### VGA Driver Installation

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000**, select **Windows Server 2008** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

### RAID Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS SW RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### Network Utility Installation

The PROSet utility for the onboard Gigabit Ethernet controller will be installed automatically when you installing the onboard Gigabit Ethernet driver.

### Windows Server 2008 Enterprise Edition Installation (with onboard SATA RAID)

Below information describes how to manually install Windows Server 2008 Enterprise Edition on Altos R520.

#### BIOS Required

Altos R520 BIOS [P88](#) (or later), BMC [63](#) (or later) and FRUSDR [47](#) (or later) are required to support Windows Server 2008.

#### Drivers Required

For Windows Server 2008 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
onboard SATA RAID	09.32.0207.2008	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.6.0.1002	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.17.0	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	8.240.50.3000	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)

---

## Software Required

The management utility of onboard SATA RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)


## Configuring onboard SATA RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.

## Installation Tips

NOTE. There is no built-in driver of onboard SATA RAID in the Windows Server 2008. You need an external USB floppy drive or USB Flash drive to load driver during the OS installation.

1. Please make a driver diskette from the EasyBUILD first before the installation.
2. Click on "Load Driver" when "Where do you want to install Windows" message displayed.
3. Select "Intel Embedded Server RAID Technology II (A:\MegaSR.inf)" as target driver
4. After loading the RAID driver from diskette, you could click "Drive options" to partition the drive.
5. Follow the normal procedure to finish the installation.
6. After the installation completes, you would see the following devices with yellow mark in Device Manager.

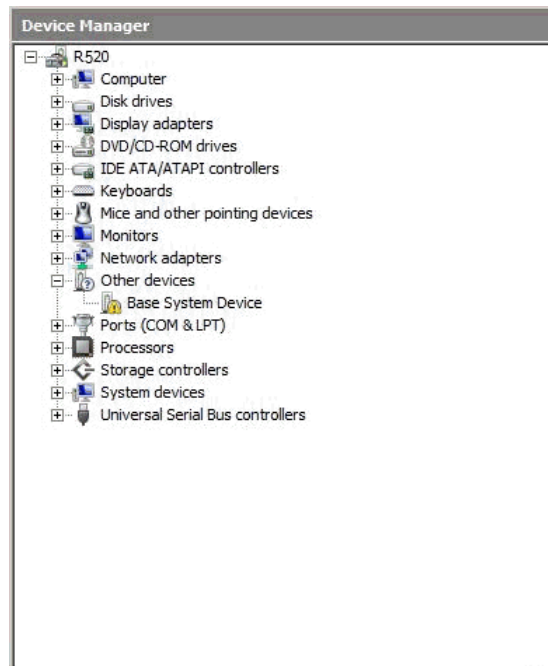

### Chipset Driver Installation

1. Please insert the EasyBUILD into the optical drive
2. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2008** and click on **Setup**.
3. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### Gigabit Ethernet Driver Installation

1. There is built-in Ethernet controller driver with Windows Server 2008. Please update the driver with EasyBUILD. Please do the same on both of the devices.
2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Network adapters** -> **Intel 82563EB Gigabit Ethernet Controller**, select **Windows Server 2008** and click on **Setup**.
4. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

### IOAT Driver Installation

The Base System Device with yellow mark in Device Manager is the IOAT device. After the Gigabit Ethernet controller driver installation completed at previous step, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### VGA Driver Installation

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000**, select **Windows Server 2008 x64** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

### RAID Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Onboard SATA RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### Network Utility Installation

The PROSet utility for the onboard Gigabit Ethernet controller will be installed automatically when you installing the onboard Gigabit Ethernet driver.

### Windows Server 2003 Enterprise x64 Edition Installation (with integrated SAS hardware RAID)

Below information describes how to manually install Windows Server 2003 Enterprise x64 Edition on Altos R520.

#### Drivers Required

For Windows Server 2003 x64 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	1.17.0.64	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	7.4.0.1005	EasyBUILD 7.1 build 400 (or later)
Onboard Gigabit Ethernet	9.3.39	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	8.24.3.0	EasyBUILD 7.1 build 400 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.52.0	EasyBUILD 7.1 build 400 (or later)
Hot-swap backplane	5.0.6055.2	EasyBUILD 7.1 build 400 (or later)

#### Software Required

The management utility of integrated SAS hardware RAID and NIC can be

found in the EasyBUILD.

Software	Version	EasyBUILD Version
Microsoft Scalable Networking Pack	N/A	<a href="http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&amp;DisplayLang=en">http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&amp;DisplayLang=en</a>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)
Intel PROSet Utility	10.4.4.2	EasyBUILD 7.1 build 400 (or later)

### **Configuring integrated SAS hardware RAID**

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.


### **Installation Tips**

NOTE. There is no built-in driver of Integrated SAS hardware RAID in the Windows Server 2003 x64. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows Server 2003 x64 can't recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the beginning of installation for providing the driver diskette for the integrated SAS hardware RAID.
3. Select "Intel(R) SAS RAID Controller Driver (Server 2003 for x64)" as target driver
4. After loading the RAID driver from diskette, follow the normal procedure to finish the installation.

### **Chipset Driver Installation**

1. After the installation completes, you would see the following devices with yellow mark in Device Manager.

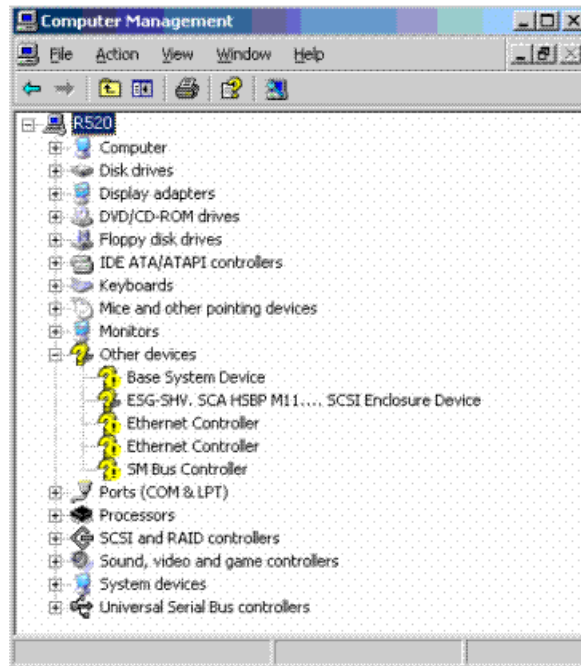

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2003 x64** and click on **Setup**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on both of the devices.
2. Right-click on the **Ethernet Controller** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.



---

### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in EasyBUILD.
2. Right-click on the **Base System Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### **Hot-swap Backplane Driver Installation**

1. There is an **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** listed under **Other device** in Windows Device Manager. It is the hot-swap SAS backplane for R520.
2. Right-click on the **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel (r) SCA Hotswap Backplane** listed in System devices.

### **VGA Driver Installation**

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers -> Altos R520 -> Graphics adapters -> ATI ES1000**, select **Windows Server 2003 x64** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

4. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

#### **Microsoft Scalable Networking Pack Installation**

You can find the Microsoft Scalable Networking Pack for Windows Server 2003 x64 in the Microsoft website:

<http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&DisplayLang=en>

1. Download the SNP from Microsoft website.
2. Double-click on the downloaded file to run the installation program.
3. Follow the instruction to install the SNP and reboot the server after the SNP is installed.

#### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities -> Altos R520 -> Integrated SAS Hardware RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

#### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities -> Altos R520 -> Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows Server 2003 x64)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

#### **Windows Server 2003 Enterprise x64 Edition Installation (with integrated SAS hardware RAID 2)**

Below information describes how to manually install Windows Server 2003 Enterprise x64 Edition on Altos R520.

#### **Drivers Required**

For Windows Server 2003 x64 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS hardware RAID 2	2.20.0.64	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.3.0.1011	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit	9.12.18.0	EasyBUILD 8.0 build 200 (or later)

Ethernet		
Onboard VGA	8.24.3-060405a-038923C-Intel	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)
Hot-swap backplane	5.0.6262.1	EasyBUILD 8.0 build 200 (or later)

### Software Required

The management utility of integrated SAS hardware RAID 2 and NIC can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
Microsoft Scalable Networking Pack	N/A	<a href="http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&amp;DisplayLang=en">http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&amp;DisplayLang=en</a>
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)

### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.


### Installation Tips

NOTE. There is no built-in driver of Integrated SAS hardware RAID 2 in the Windows Server 2003 x64. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows Server 2003 x64 can't recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the beginning of installation for providing the driver diskette for the integrated SAS hardware RAID 2.
3. Select "Intel(R) SAS RAID Controller Driver (Server 2003 for x64)" as target driver
4. After loading the RAID driver from diskette, follow the normal procedure to finish the installation.

### Chipset Driver Installation

1. After the installation completes, you would see the following devices with yellow mark in Device Manager.

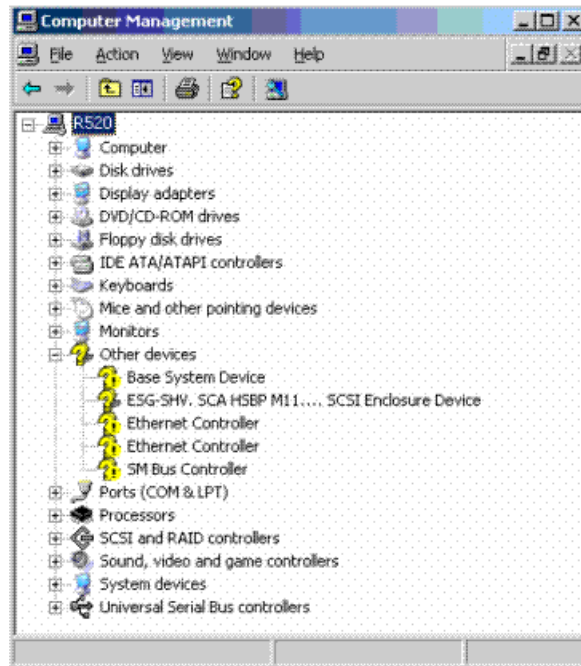

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2003 x64** and click on **Setup**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on both of the devices.
2. Right-click on the **Ethernet Controller** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

---

### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in EasyBUILD.
2. Right-click on the **Base System Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### **Hot-swap Backplane Driver Installation**

1. There is an **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** listed under **Other device** in Windows Device Manager. It is the hot-swap SAS backplane for R520.
2. Right-click on the **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel (r) SCA Hotswap Backplane** listed in System devices.

### **VGA Driver Installation**

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers -> Altos R520 -> Graphics adapters -> ATI ES1000**, select **Windows Server 2003 x64** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

4. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

### **Microsoft Scalable Networking Pack Installation**

You can find the Microsoft Scalable Networking Pack for Windows Server 2003 x64 in the Microsoft website:

<http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&DisplayLang=en>

1. Download the SNP from Microsoft website.
2. Double-click on the downloaded file to run the installation program.
3. Follow the instruction to install the SNP and reboot the server after the SNP is installed.

### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities -> Altos R520 -> Integrated SAS hardware RAID 2**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities -> Altos R520 -> Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows Server 2003 x64)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

### **Windows Server 2003 Enterprise x64 Edition Installation (with integrated SAS SW RAID)**

Below information describes how to manually install Windows Server 2003 Enterprise x64 Edition on Altos R520.

#### **Drivers Required**

For Windows Server 2003 x64 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS SW RAID	04.24.0620.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	7.4.0.1005	EasyBUILD 7.1 build 400 (or later)
Onboard Gigabit	9.3.39	EasyBUILD 7.1 build 400 (or later)

Ethernet		
Onboard VGA	8.24.3.0	EasyBUILD 7.1 build 400 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.52.0	EasyBUILD 7.1 build 400 (or later)

### Software Required

The management utility of integrated SAS SW RAID and NIC can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
Microsoft Scalable Networking Pack	N/A	<a href="http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&amp;DisplayLang=en">http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&amp;DisplayLang=en</a>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)
Intel PROSet Utility	10.4.4.2	EasyBUILD 7.1 build 400 (or later)

### Configuring integrated SAS hardware RAID

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.


#### Installation Tips

NOTE. There is no built-in driver of Integrated SAS SW RAID in the Windows Server 2003 x64. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows Server 2003 x64 can't recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the beginning of installation for providing the driver diskette for the integrated SAS SW RAID.
3. Select "Intel Embedded Server RAID Technology II (Windows XP/2003 64-bit)" as target driver
4. After loading the RAID driver from diskette, follow the normal procedure to finish the installation.

#### Chipset Driver Installation

1. After the installation completes, you would see the following devices with yellow mark in Device Manager.

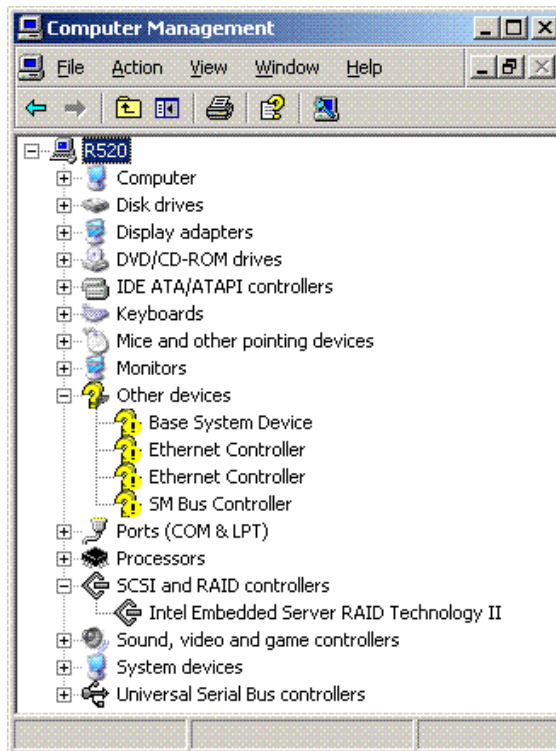

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2003 x64** and click on **Setup**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

#### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on both of the devices.
2. Right-click on the **Ethernet Controller** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) PRO/1000 EB Network**



---

Connection with I/O Acceleration listed in Network adapters.

#### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in EasyBUILD.
2. Right-click on the **Base System Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

#### **VGA Driver Installation**

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers -> Altos R520 -> Graphics adapters -> ATI ES1000**, select **Windows Server 2003 x64** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.
4. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

#### **Microsoft Scalable Networking Pack Installation**

You can find the Microsoft Scalable Networking Pack for Windows Server 2003 x64 in the Microsoft website:

<http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&DisplayLang=en>

1. Download the SNP from Microsoft website.
2. Double-click on the downloaded file to run the installation program.
3. Follow the instruction to install the SNP and reboot the server after the SNP is installed.

#### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.

2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS SW RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

#### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows Server 2003 x64)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

#### **Windows Server 2003 Enterprise x64 Edition Installation (with onboard SATA RAID)**

Below information describes how to manually install Windows Server 2003 Enterprise x64 Edition on Altos R520.

#### **Drivers Required**

For Windows Server 2003 x64 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
onboard SATA RAID	04.24.0620.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	7.4.0.1005	EasyBUILD 7.1 build 400 (or later)
Onboard Gigabit Ethernet	9.3.39	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	8.24.3.0	EasyBUILD 7.1 build 400 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.52.0	EasyBUILD 7.1 build 400 (or later)

#### **Software Required**

The management utility of onboard SATA RAID and NIC can be found in the EasyBUILD.

<b>Software</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Microsoft Scalable Networking Pack	N/A	<a href="http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&amp;DisplayLang=en">http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&amp;DisplayLang=en</a>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)
Intel PROSet Utility	10.4.4.2	EasyBUILD 7.1 build 400 (or later)

## Configuring onboard SATA RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.


### Installation Tips

NOTE. There is no built-in driver of Onboard SATA RAID in the Windows Server 2003 x64. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows Server 2003 x64 can't recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the beginning of installation for providing the driver diskette for the onboard SATA RAID.
3. Select "Intel Embedded Server RAID Technology II (Windows XP/2003 64-bit)" as target driver
4. After loading the RAID driver from diskette, follow the normal procedure to finish the installation.

### Chipset Driver Installation

1. After the installation completes, you would see the following devices with yellow mark in Device Manager.

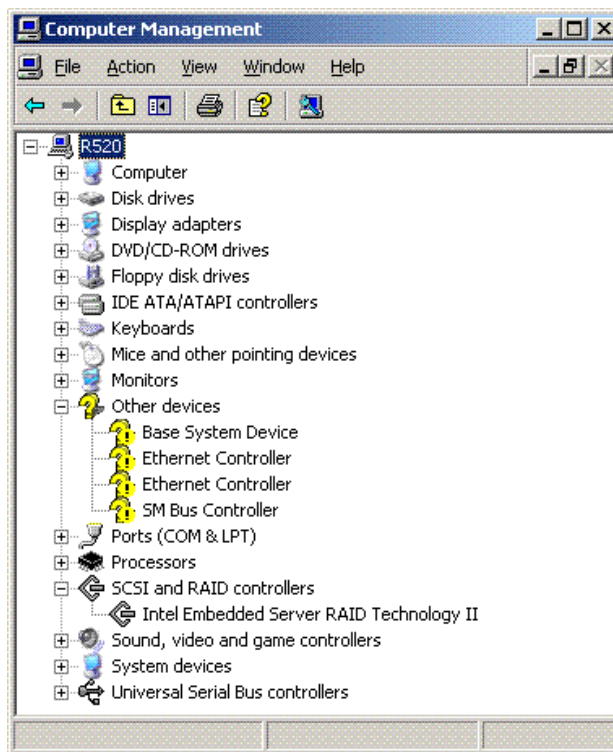

2. Please insert the EasyBUILD into the optical drive

- 
3. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2003 x64** and click on **Setup**.
  4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

#### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on both of the devices.
2. Right-click on the **Ethernet Controller** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

#### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in EasyBUILD.
2. Right-click on the **Base System Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

#### **VGA Driver Installation**

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.

2. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000**, select **Windows Server 2003 x64** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.
4. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

#### **Microsoft Scalable Networking Pack Installation**

You can find the Microsoft Scalable Networking Pack for Windows Server 2003 x64 in the Microsoft website:

<http://www.microsoft.com/downloads/details.aspx?FamilyID=778ee6fe-5359-4c2f-b89d-f35f2b1b83cd&DisplayLang=en>

1. Download the SNP from Microsoft website.
2. Double-click on the downloaded file to run the installation program.
3. Follow the instruction to install the SNP and reboot the server after the SNP is installed.

#### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Onboard SATA RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

#### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows Server 2003 x64)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

### **Windows Server 2003 Enterprise Edition SP1 Installation (with integrated SAS hardware RAID)**

Below information describes how to manually install Windows Server 2003 Enterprise Edition on Altos R520.

#### **Drivers Required**

For Windows Server 2003 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS	1.17.0.32	EasyBUILD 7.1 build 400 (or later)

hardware RAID		
Onboard Chipset	7.4.0.1005	EasyBUILD 7.1 build 400 (or later)
Onboard Gigabit Ethernet	9.3.39.0	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	8.24.3.0	EasyBUILD 7.1 build 400 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.52.0	EasyBUILD 7.1 build 400 (or later)
Hot-swap backplane	5.0.6055.2	EasyBUILD 7.1 build 400 (or later)

### Software Required

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
Microsoft Scalable Networking Pack	N/A	<a href="http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&amp;DisplayLang=en">http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&amp;DisplayLang=en</a>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)
Intel PROSet Utility	10.4.4.2	EasyBUILD 7.1 build 400 (or later)

### Configuring integrated SAS hardware RAID

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.


### Installation Tips

NOTE. There is no built-in driver of Integrated SAS hardware RAID in the Windows Server 2003. You need an external USB floppy drive to load driver during the OS installation.

- As Windows Server 2003 can't recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
- Press F6 at the start of installation to provide the driver disk for the integrated SAS hardware RAID.
- Select "Intel(R) SAS RAID Controller Driver (Server 2003 32-bit)" as target driver
- After loading the RAID driver from diskette, follow the normal procedure to finish the installation.

### Chipset Driver Installation

- After the installation completes, you would see the following devices with yellow mark in Device Manager.

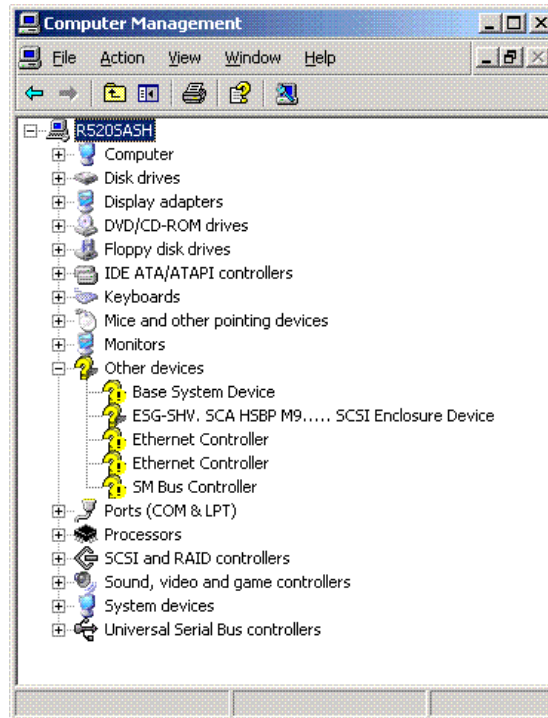

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2003** and click on **Setup**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

#### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on both of the devices.
2. Right-click on the **Ethernet Controller** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

---

### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in EasyBUILD.
2. Right-click on the **Base System Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### **Hot-swap Backplane Driver Installation**

1. There is a **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** listed under **Other device** in Windows Device Manager. It is the hot-swap SAS backplane for R520.
2. Right-click on the **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel (r) SCA Hotswap Backplane** listed in System devices.

### **VGA Driver Installation**

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers -> Altos R520 -> Graphics adapters -> ATI ES1000**, select **Windows Server 2003** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.



4. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

### **Microsoft Scalable Networking Pack Installation**

You can find the Microsoft Scalable Networking Pack for Windows Server 2003 in the Microsoft website:

<http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&DisplayLang=en>

1. Download the SNP from Microsoft website.
2. Double-click on the downloaded file to run the installation program.
3. Follow the instruction to install the SNP and reboot the server after the SNP is installed.

### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS Hardware RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows Server 2003)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

### **Windows Server 2003 Enterprise Edition SP1 Installation (with integrated SAS hardware RAID 2)**

Below information describes how to manually install Windows Server 2003 Enterprise Edition on Altos R520.

#### **Drivers Required**

For Windows Server 2003 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS hardware RAID 2	2.20.0.32	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.3.0.1011	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.18.0	EasyBUILD 8.0 build 200 (or later)

Onboard VGA	8.24.3-060405a-038923C-Intel	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)
Hot-swap backplane	5.0.6262.1	EasyBUILD 8.0 build 200 (or later)

### Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
Microsoft Scalable Networking Pack	N/A	<a href="http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&amp;DisplayLang=en">http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&amp;DisplayLang=en</a>
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)

### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.


### Installation Tips

NOTE. There is no built-in driver of Integrated SAS hardware RAID 2 in the Windows Server 2003. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows Server 2003 can't recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the start of installation to provide the driver disk for the integrated SAS hardware RAID 2.
3. Select "Intel(R) SAS RAID Controller Driver (Server 2003 32-bit)" as target driver
4. After loading the RAID driver from diskette, follow the normal procedure to finish the installation.

### Chipset Driver Installation

1. After the installation completes, you would see the following devices with yellow mark in Device Manager.

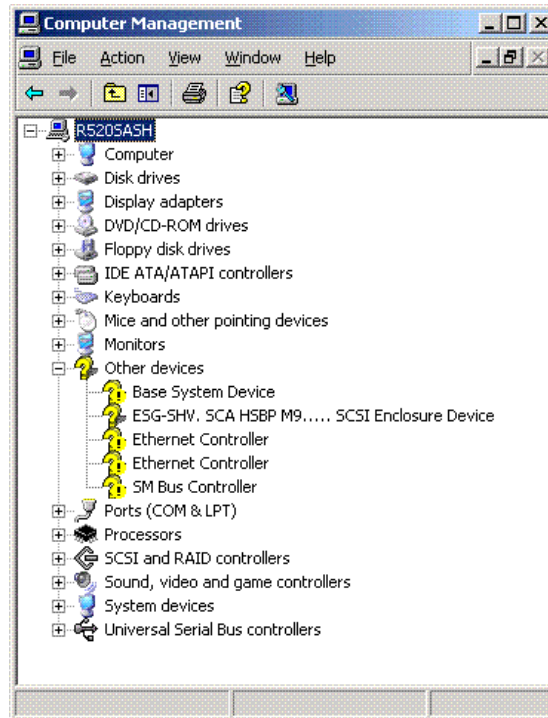

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2003** and click on **Setup**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

#### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on both of the devices.
2. Right-click on the **Ethernet Controller** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

---

### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in EasyBUILD.
2. Right-click on the **Base System Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### **Hot-swap Backplane Driver Installation**

1. There is a **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** listed under **Other device** in Windows Device Manager. It is the hot-swap SAS backplane for R520.
2. Right-click on the **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel (r) SCA Hotswap Backplane** listed in System devices.

### **VGA Driver Installation**

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers -> Altos R520 -> Graphics adapters -> ATI ES1000**, select **Windows Server 2003** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

- 
4. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

#### **Microsoft Scalable Networking Pack Installation**

You can find the Microsoft Scalable Networking Pack for Windows Server 2003 in the Microsoft website:

<http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&DisplayLang=en>

1. Download the SNP from Microsoft website.
2. Double-click on the downloaded file to run the installation program.
3. Follow the instruction to install the SNP and reboot the server after the SNP is installed.

#### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS Hareware RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

#### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows Server 2003)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

#### **Windows Server 2003 Enterprise Edition SP1 Installation (with integrated SAS SW RAID)**

Below information describes how to manually install Windows Server 2003 Enterprise Edition on Altos R520.

#### **Drivers Required**

For Windows Server 2003 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS SW RAID	04.24.0620.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	7.4.0.1005	EasyBUILD 7.1 build 400 (or later)
Onboard Gigabit Ethernet	9.3.39.0	EasyBUILD 7.1 build 400 (or later)

Onboard VGA	8.24.3.0	EasyBUILD 7.1 build 400 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.52.0	EasyBUILD 7.1 build 400 (or later)

### Software Required

The management utility of integrated SAS SW RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
Microsoft Scalable Networking Pack	N/A	<a href="http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&amp;DisplayLang=en">http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&amp;DisplayLang=en</a>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)
Intel PROSet Utility	10.4.4.2	EasyBUILD 7.1 build 400 (or later)

### Configuring integrated SAS SW RAID

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.


### Installation Tips

NOTE. There is no built-in driver of Integrated SAS SW RAID in the Windows Server 2003. You need an external USB floppy drive for applying driver during the OS installation.

1. As Windows Server 2003 can't recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the start of installation to provide the driver disk for the integrated SAS SW RAID.
3. Select "Intel Embedded Server RAID Technology II (Windows XP/2003)" as target driver
4. After loading the RAID driver from diskette, follow the normal procedure to finish the installation.

### Chipset Driver Installation

1. After the installation completes, you would see the following devices with yellow mark in Device Manager.

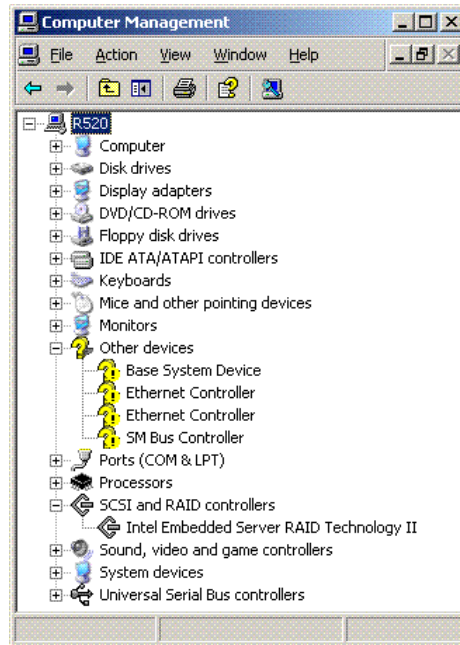

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2003** and click on **Setup**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

#### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on both of the devices.
2. Right-click on the **Ethernet Controller** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

---

### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in EasyBUILD.
2. Right-click on the **Base System Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### **VGA Driver Installation**

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers -> Altos R520 -> Graphics adapters -> ATI ES1000**, select **Windows Server 2003** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.
4. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

### **Microsoft Scalable Networking Pack Installation**

You can find the Microsoft Scalable Networking Pack for Windows Server 2003 in the Microsoft website:

<http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&DisplayLang=en>

1. Download the SNP from Microsoft website.
2. Double-click on the downloaded file to run the installation program.
3. Follow the instruction to install the SNP and reboot the server after the SNP is installed.

### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities -> Altos R520 -> Integrated SAS SW RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.



3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### Network Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows Server 2003)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

### Windows Server 2003 Enterprise Edition SP1 Installation (with onboard SATA RAID)

Below information describes how to manually install Windows Server 2003 Enterprise Edition on Altos R520.

#### Drivers Required

For Windows Server 2003 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
onboard SATA RAID	04.24.0620.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	7.4.0.1005	EasyBUILD 7.1 build 400 (or later)
Onboard Gigabit Ethernet	9.3.39.0	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	8.24.3.0	EasyBUILD 7.1 build 400 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.52.0	EasyBUILD 7.1 build 400 (or later)

#### Software Required

The management utility of onboard SATA RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
Microsoft Scalable Networking Pack	N/A	<a href="http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&amp;DisplayLang=en">http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&amp;DisplayLang=en</a>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)
Intel PROSet Utility	10.4.4.2	EasyBUILD 7.1 build 400 (or later)

#### Configuring onboard SATA RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.


## Installation Tips

NOTE. There is no built-in driver of onboard SATA RAID in the Windows Server 2003. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows Server 2003 can't recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the start of installation to provide the driver disk for the onboard SATA RAID.
3. Select "Intel Embedded Server RAID Technology II (Windows XP/2003)" as target driver
4. After loading the RAID driver from diskette, follow the normal procedure to finish the installation.

## Chipset Driver Installation

1. After the installation completes, you would see the following devices with yellow mark in Device Manager.

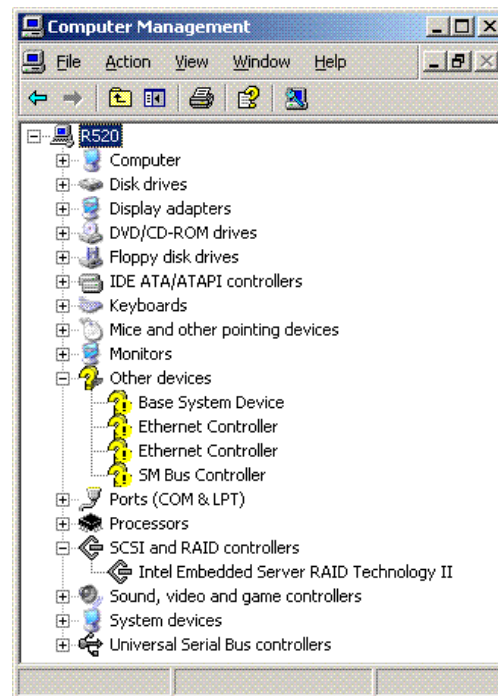

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset**, select **Windows Server 2003** and click on **Setup**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

---

### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on both of the devices.
2. Right-click on the **Ethernet Controller** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in EasyBUILD.
2. Right-click on the **Base System Device** and select **Update Driver**.
3. Select **No, not this time**. Do not connect to Windows Update to search the driver.
4. Select **Install from a list or specific location (Advanced)**.
5. Select **Search the best driver these locations** and check **Include this location in the search**.
6. Click on **Browse** and specify the path for the driver.
7. Click on **Next** and follow the instruction to finish the driver update.
8. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### **VGA Driver Installation**

1. Windows will treat onboard VGA as Standard VGA device. You can find the ATI ES1000 driver in EasyBUILD. Please insert the EasyBUILD into the optical drive.
2. Expand **Drivers -> Altos R520 -> Graphics adapters -> ATI ES1000**, select **Windows Server 2003** and click on **Setup**.
3. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.

4. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

### **Microsoft Scalable Networking Pack Installation**

You can find the Microsoft Scalable Networking Pack for Windows Server 2003 in the Microsoft website:

<http://www.microsoft.com/downloads/details.aspx?FamilyID=c65f4a89-f4da-463e-a496-4b5abd660bf9&DisplayLang=en>

1. Download the SNP from Microsoft website.
2. Double-click on the downloaded file to run the installation program.
3. Follow the instruction to install the SNP and reboot the server after the SNP is installed.

### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities -> Altos R520 -> Onboard SATA RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities -> Altos R520 -> Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows Server 2003)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

### **Windows 2000 Advanced Server SP4 Installation (with integrated SAS hardware RAID)**

Below information describes how to manually install Microsoft Windows 2000 Advanced Server SP4 on Altos R520 with integrated SAS hardware RAID.

#### **Drivers Required**

For Windows 2000 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS hardware RAID	1.17.0.32	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	7.4.0.1005	EasyBUILD 7.1 build 400 (or later)
Onboard Gigabit Ethernet	9.3.39	EasyBUILD 7.1 build 400 (or later)

Onboard VGA	8.24.3.0	EasyBUILD 7.1 build 400 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.52.0	EasyBUILD 7.1 build 400 (or later)
Hot-swap backplane	5.0.6055.2	EasyBUILD 7.1 build 400 (or later)

### Software Required

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)
Intel PROSet Utility	10.4.4.2	EasyBUILD 7.1 build 400 (or later)

### Configuring integrated SAS hardware RAID

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.


### Installation Tips

NOTE. There is no built-in driver Integrated SAS hardware RAID in the Windows Server 2003. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows 2000 can't recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the start of installation to provide the driver disk for the onboard ROMB.
3. Select "Intel(R) SAS RAID Controller Driver (Windows 2000)" as target driver
4. After loading the driver from diskette, follow the normal procedure to finish the installation.

### Chipset Driver Installation

1. After the installation completes, you would see the following other devices listed in Device Manager.

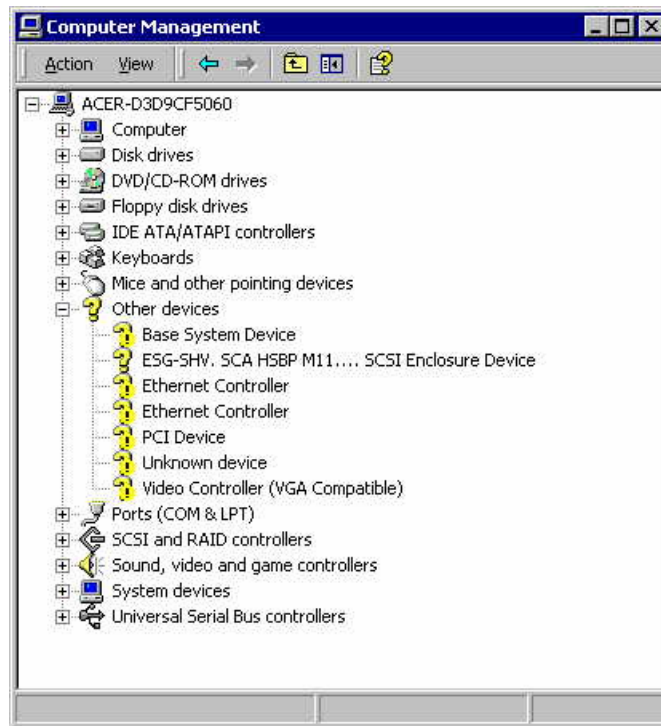

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset** and double-click on **Windows 2000**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

#### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on the both of the devices.
2. Right-click on the **Ethernet Controller** and select **Properties**.
3. Select **Driver** tab and click on **Update Driver**.
4. Follow the instructions. Select Search for a suitable driver for my device (Recommended) and click on Next.
5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
6. Follow the instructions to finish the installation.
7. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

---

### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in Resource CD.
2. Right-click on the **Base System Device** and select **Properties**.
3. Select **Driver** tab and click on **Update Driver**.
4. Follow the instructions. Select Search for a suitable driver for my device (Recommended) and click on Next.
5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
6. Follow the instruction to finish the driver update.
7. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

### **Hot-swap Backplane Driver Installation**

1. There is a **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** listed under **Other device** in Windows Device Manager. It is the hot-swap SAS backplane for R520.
2. Right-click on the **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** and select **Properties**.
3. Select **Driver** tab and click on **Update Driver**.
4. Follow the instructions. Select Search for a suitable driver for my device (Recommended) and click on Next.
5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
6. Follow the instruction to finish the driver update.
7. After installing the driver, you would see **Intel (r) SCA Hotswap Backplane** listed in System devices.

### **VGA Driver Installation**

1. There is a **VGA controller (VGA Compatible)** listed under **Other devices** in Windows Device Manager. It is the ATI ES1000 for R520.
2. Insert the EasyBUILD into the optical drive.
3. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000** and double-click on **Windows 2000**.
4. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.
5. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

### RAID Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS Hardware RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

### Network Utility Installation

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows 2000)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

### Windows 2000 Advanced Server SP4 Installation (with integrated SAS hardware RAID 2)

Below information describes how to manually install Microsoft Windows 2000 Advanced Server SP4 on Altos R520 with integrated SAS hardware RAID 2.

#### Drivers Required

For Windows 2000 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	2.20.0.32	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	8.3.0.1011	EasyBUILD 8.0 build 200 (or later)
Onboard Gigabit Ethernet	9.12.18.0	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	8.24.3-060405a-038923C-Intel	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.79.9	EasyBUILD 8.0 build 200 (or later)
Hot-swap backplane	5.0.6262.1	EasyBUILD 8.0 build 200 (or later)

#### Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)



Intel PROSet Utility	13.0.44.0	EasyBUILD 8.0 build 200 (or later)
----------------------	-----------	------------------------------------

### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.


#### Installation Tips

NOTE. There is no built-in driver Integrated SAS hardware RAID 2 in the Windows Server 2003. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows 2000 can't recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the start of installation to provide the driver disk for the onboard ROMB.
3. Select "Intel(R) SAS RAID Controller Driver (Windows 2000)" as target driver
4. After loading the driver from diskette, follow the normal procedure to finish the installation.

#### Chipset Driver Installation

1. After the installation completes, you would see the following other devices listed in Device Manager.

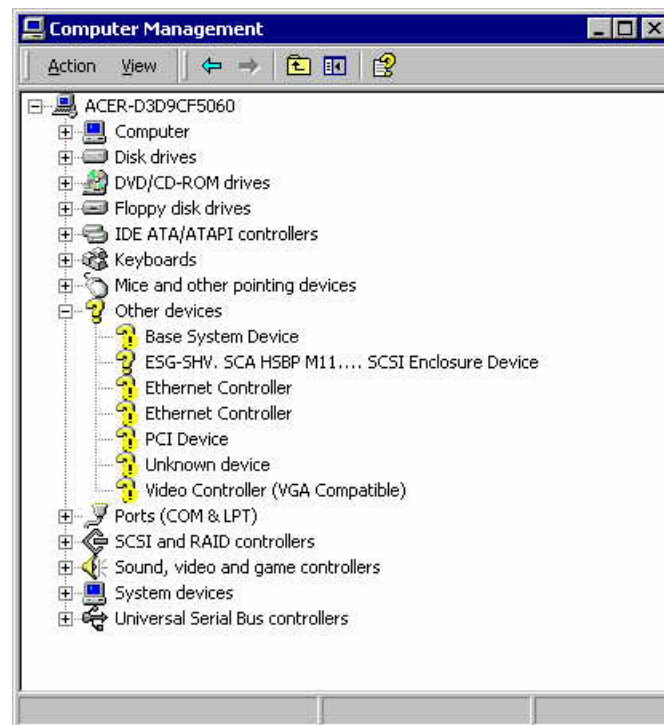

- 
2. Please insert the EasyBUILD into the optical drive
  3. Expand **Drivers** -> **Altos R520** -> **Chipset** and double-click on **Windows 2000**.
  4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

#### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on the both of the devices.
2. Right-click on the **Ethernet Controller** and select **Properties**.
3. Select **Driver** tab and click on **Update Driver**.
4. Follow the instructions. Select Search for a suitable driver for my device (Recommended) and click on Next.
5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
6. Follow the instructions to finish the installation.
7. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

#### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in Resource CD.
2. Right-click on the **Base System Device** and select **Properties**.
3. Select **Driver** tab and click on **Update Driver**.
4. Follow the instructions. Select Search for a suitable driver for my device (Recommended) and click on Next.
5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
6. Follow the instruction to finish the driver update.
7. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

#### **Hot-swap Backplane Driver Installation**

1. There is a **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** listed under **Other device** in Windows Device Manager. It is the hot-swap SAS backplane for R520.
2. Right-click on the **ESG-SHV SCA HSBP M11.... SCSI Enclosure Device** and

---

select **Properties**.

3. Select **Driver** tab and click on **Update Driver**.
4. Follow the instructions. Select **Search for a suitable driver for my device (Recommended)** and click on **Next**.
5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
6. Follow the instruction to finish the driver update.
7. After installing the driver, you would see **Intel (r) SCA Hotswap Backplane** listed in System devices.

#### **VGA Driver Installation**

1. There is a **VGA controller (VGA Compatible)** listed under **Other devices** in Windows Device Manager. It is the **ATI ES1000** for R520.
2. Insert the EasyBUILD into the optical drive.
3. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000** and double-click on **Windows 2000**.
4. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.
5. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

#### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS Hardware RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

#### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows 2000)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

### **Windows 2000 Advanced Server SP4 Installation (with integrated SAS SW RAID)**

Below information describes how to manually install Microsoft Windows 2000

Advanced Server SP4 on Altos R520 with integrated SAS SW RAID.

### Drivers Required

For Windows 2000 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS SW RAID	04.24.0620.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	7.4.0.1005	EasyBUILD 7.1 build 400 (or later)
Onboard Gigabit Ethernet	9.3.39	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	8.24.3.0	EasyBUILD 7.1 build 400 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.52.0	EasyBUILD 7.1 build 400 (or later)

### Software Required

The management utility of integrated SAS SW RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)
Intel PROSet Utility	10.4.4.2	EasyBUILD 7.1 build 400 (or later)

### Configuring integrated SAS SW RAID

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.


### Installation Tips

NOTE. There is no built-in driver Integrated SAS SW RAID in the Windows Server 2003. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows 2000 can't recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the start of installation to provide the driver disk for the onboard ROMB.
3. Select "Intel Embedded Server RAID Technology II (Windows 2000 SP4)" as target driver
4. After loading the driver from diskette, follow the normal procedure to finish the installation.

### Chipset Driver Installation

1. After the installation completes, you would see the following other devices listed in Device Manager.

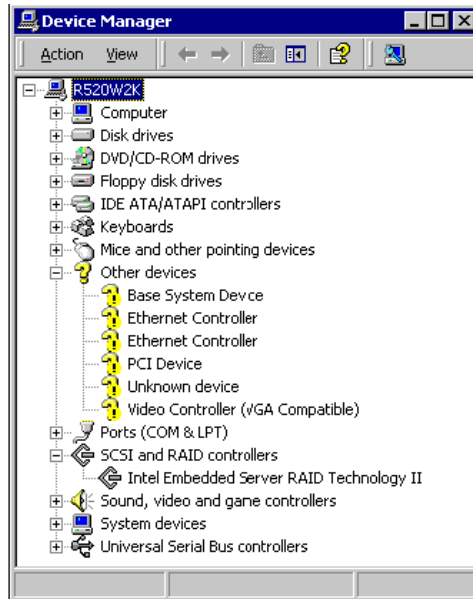

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset** and double-click on **Windows 2000**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

#### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on the both of the devices.
2. Right-click on the **Ethernet Controller** and select **Properties**.
3. Select **Driver** tab and click on **Update Driver**.
4. Follow the instructions. Select **Search for a suitable driver for my device (Recommended)** and click on **Next**.
5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
6. Follow the instructions to finish the installation.
7. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

#### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in Resource CD.

- 
2. Right-click on the **Base System Device** and select **Properties**.
  3. Select **Driver** tab and click on **Update Driver**.
  4. Follow the instructions. Select Search for a suitable driver for my device (Recommended) and click on Next.
  5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
  6. Follow the instruction to finish the driver update.
  7. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

#### **VGA Driver Installation**

1. There is a **VGA controller (VGA Compatible)** listed under **Other devices** in Windows Device Manager. It is the ATI ES1000 for R520.
2. Insert the EasyBUILD into the optical drive.
3. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000** and double-click on **Windows 2000**.
4. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.
5. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

#### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Integrated SAS SW RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

#### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows 2000)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

#### **Windows 2000 Advanced Server SP4 Installation (with onboard SATA RAID)**

Below information describes how to manually install Microsoft Windows 2000

---

Advanced Server SP4 on Altos R520 with onboard SATA RAID.

### Drivers Required

For Windows 2000 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
onboard SATA RAID	04.24.0620.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	7.4.0.1005	EasyBUILD 7.1 build 400 (or later)
Onboard Gigabit Ethernet	9.3.39	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	8.24.3.0	EasyBUILD 7.1 build 400 (or later)
Onboard USB 2.0	N/A	OS built-in
IOAT	1.2.52.0	EasyBUILD 7.1 build 400 (or later)

### Software Required

The management utility of onboard SATA RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)
Intel PROSet Utility	10.4.4.2	EasyBUILD 7.1 build 400 (or later)

### Configuring onboard SATA RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.


### Installation Tips

NOTE. There is no built-in driver Onboard SATA RAID in the Windows Server 2003. You need an external USB floppy drive to load driver during the OS installation.

1. As Windows 2000 can't recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Press F6 at the start of installation to provide the driver disk for the onboard ROMB.
3. Select "Intel Embedded Server RAID Technology II (Windows 2000 SP4)" as target driver
4. After loading the driver from diskette, follow the normal procedure to finish the installation.

### Chipset Driver Installation

1. After the installation completes, you would see the following other devices listed in Device Manager.

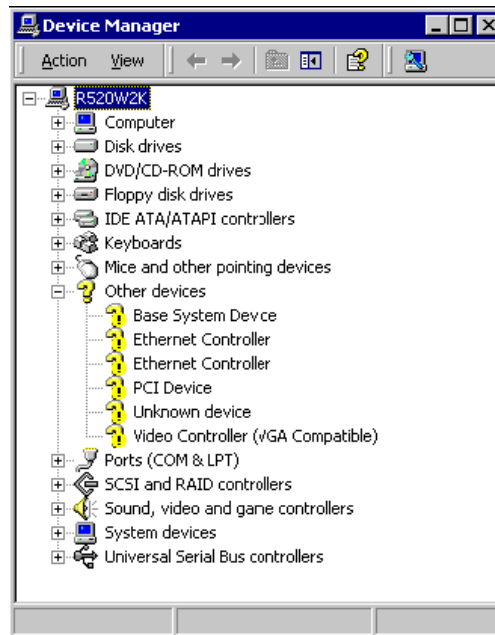

2. Please insert the EasyBUILD into the optical drive
3. Expand **Drivers** -> **Altos R520** -> **Chipset** and double-click on **Windows 2000**.
4. Follow the instruction to install the driver and reboot the server after the chipset driver is installed.

#### **Gigabit Ethernet Driver Installation**

1. There are two **Ethernet Controller** listed under **Other device** in Windows Device Manager. It should be the onboard Intel 82563EB Gigabit Ethernet controller. You could find the driver in EasyBUILD. Please do the same on the both of the devices.
2. Right-click on the **Ethernet Controller** and select **Properties**.
3. Select **Driver** tab and click on **Update Driver**.
4. Follow the instructions. Select Search for a suitable driver for my device (Recommended) and click on Next.
5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
6. Follow the instructions to finish the installation.
7. After installing the driver, you would see **Intel(R) PRO/1000 EB Network Connection with I/O Acceleration** listed in Network adapters.

#### **IOAT Driver Installation**

1. For **Base System Device**, it should be the onboard IOAT device. You could find the driver in Resource CD.



- 
2. Right-click on the **Base System Device** and select **Properties**.
  3. Select **Driver** tab and click on **Update Driver**.
  4. Follow the instructions. Select Search for a suitable driver for my device (Recommended) and click on Next.
  5. Check on the **Specify a location** and click on **Next** to specify the path for the driver.
  6. Follow the instruction to finish the driver update.
  7. After installing the driver, you would see **Intel(R) 5000 Series Chipsets Integrated Device – 1A38** listed in System devices.

#### **VGA Driver Installation**

1. There is a **VGA controller (VGA Compatible)** listed under **Other devices** in Windows Device Manager. It is the ATI ES1000 for R520.
2. Insert the EasyBUILD into the optical drive.
3. Expand **Drivers** -> **Altos R520** -> **Graphics adapters** -> **ATI ES1000** and double-click on **Windows 2000**.
4. Follow the instruction to install the VGA driver and reboot the server after the driver is installed.
5. After installing the driver, you would see **ATI ES1000** listed in Display adapters.

#### **RAID Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Onboard SATA RAID**, select **RAID Web Console 2 (Windows)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the RAID Utility Installation.

#### **Network Utility Installation**

1. Please insert the EasyBUILD into the optical drive.
2. Expand **Utilities** -> **Altos R520** -> **Intel Gigabit Ethernet Controller/Intel PRO/1000 Network Adapter**, select **PROSet Utility (Windows 2000)** and click on **Setup**.
3. Follow the instruction and use the default setting to complete the Network Utility Installation.

### **Red Hat Enterprise Linux 5.0 EM64T Installation (with integrated SAS hardware RAID)**

Below information describes how to manually install Red Hat Enterprise Linux

---

5.0 EM64T on Altos R520 with integrated SAS hardware RAID.

### Drivers Required

For Red Hat Enterprise Linux 5.0 EM64T Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	00.00.03.09	EasyBUILD 8.0 build 100 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.6.5	EasyBUILD 8.0 build 100 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)

### Software Required

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.19-01	EasyBUILD 8.0 build 100 (or later)

### Configuring integrated SAS hardware RAID

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

### Installation Tips

NOTE. There is no built-in driver for Integrated SAS hardware RAID in the Red Hat Enterprise Linux 5.0 EM64T. You need an external USB floppy drive for applying driver during the OS installation.

4. Since Red Hat Enterprise Linux 5.0 EM64T cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
5. Type **linux dd** when the prompt **boot:** appears at the start.
6. Please select the **sda** as the **Driver Disk Source**.
7. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
8. At the package selection step, select **Software Development** for the installation package.
9. Please follow the normal procedure to finish the installation.

---

## Gigabit Ethernet Driver Installation

NOTE. Please install the `kernel-devel-<version>` package with the CD #1 of Red Hat Enterprise Linux 5 EM64T prior to install the Gigabit Ethernet driver.

1. You can find the Gigabit Ethernet driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
# mount /dev/dvd /mnt
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Remove the OS built-in NIC driver

```
# rmmod e1000.ko
```

3. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
# make install
# insmod e1000.ko
```

4. Run the kudzu utility, it will auto detect the Gigabit Ethernet controller and help you to configure it.

```
# kudzu
```

5. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

## IOAT driver installation

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
Copy the IOAT driver to /tmp
# cd /tmp
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
# make install
```

4. Load the IOAT driver

```
# modprobe dca
# cd ioatdma
```

```
# insmod ioatdma.ko
# modprobe ioatdma
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### RAID Utility Installation

NOTE. Please install the [compat-libstdc++-296-2.96-138.i386.rpm](#) and [compat-libstdc++-33-3.2.3-61.i386.rpm](#) packages with the CD #3 of Red Hat Enterprise Linux 5 EM64T prior to install the RAID Web Console 2.

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
# cp -R
/media/cdrecorder/app/r520/raid/Integrated_SAS/Linux/.
/tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v2_19_01.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

### Red Hat Enterprise Linux 5.0 EM64T Installation (with integrated SAS hardware RAID 2)

Below information describes how to manually install Red Hat Enterprise Linux 5.0 EM64T on Altos R520 with integrated SAS hardware RAID 2.

#### Drivers Required

For Red Hat Enterprise Linux 5.0 EM64T Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	00.00.03.18	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	N/A	OS built-in

Onboard Gigabit Ethernet	0.3.3.3	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)

### Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)

### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

### Installation Tips

NOTE. There is no built-in driver for Integrated SAS hardware RAID 2 in the Red Hat Enterprise Linux 5.0 EM64T. You need an external USB floppy drive for applying driver during the OS installation.

1. Since Red Hat Enterprise Linux 5.0 EM64T cannot recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the integrated SAS hardware RAID 2 driver from the driver diskette.
5. At the package selection step, select **Software Development** for the installation package.
6. Please follow the normal procedure to finish the installation.

### Gigabit Ethernet Driver Installation

NOTE. Please install the `kernel-devel-<version>` package with the CD #1 of Red Hat Enterprise Linux 5 EM64T prior to install the Gigabit Ethernet driver.

1. You can find the Gigabit Ethernet driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
# mount /dev/dvd /mnt
```

```
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Remove the OS built-in NIC driver

---

```
# rmmmod e1000.ko
```

3. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

4. Run the kudzu utility, it will auto detect the Gigabit Ethernet controller and help you to configure it.

```
# kudzu
```

5. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **IOAT driver installation**

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
```

```
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp
```

```
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
```

```
# make install
```

4. Load the IOAT driver

```
# modprobe dca
```

```
# cd ioatdma
```

```
# insmod ioatdma.ko
```

```
# modprobe ioatdma
```

```
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### **RAID Utility Installation**

NOTE. Please install the [compat-libstdc++-296-2.96-138.i386.rpm](#) and [compat-libstdc++-33-3.2.3-61.i386.rpm](#) packages with the CD #3 of Red Hat Enterprise

Linux 5 EM64T prior to install the RAID Web Console 2.

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder  
  
# cp -R  
/media/cdrecorder/app/r520/raid/Integrated_SAS/Linux/.  
/tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/  
  
# unzip ir3_Linux_RWC2_v2_19_01.zip  
  
# chmod 755 install.sh  
  
# chmod 755 RunRPM.sh  
  
# ./install.sh
```

3. Type y to accept the license agree and select 1 for full installation.
4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

## Red Hat Enterprise Linux 5.0 EM64T Installation (with integrated SAS SW RAID)

Below information describes how to manually install Red Hat Enterprise Linux 5.0 EM64T on Altos R520 with integrated SAS SW RAID.

### Drivers Required

For Red Hat Enterprise Linux 5.0 EM64T Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	09.32.0207.2008	EasyBUILD 8.0 build 100 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.6.5	EasyBUILD 8.0 build 100 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)

### Software Required

The management utility of integrated SAS SW RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
----------	---------	-------------------

---

RAID Web Console 2	2.19-01	EasyBUILD 8.0 build 100 (or later)
-----------------------	---------	------------------------------------

### Configuring integrated SAS hardware RAID

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

#### Installation Tips

NOTE. There is no built-in driver for Integrated SAS SW RAID in the Red Hat Enterprise Linux 5.0 EM64T. You need an external USB floppy drive for applying driver during the OS installation.

1. Since Red Hat Enterprise Linux 5.0 EM64T cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
5. At the package selection step, select **Software Development** for the installation package.
6. Please follow the normal procedure to finish the installation.

#### Gigabit Ethernet Driver Installation

NOTE. Please install the `kernel-devel-<version>` package with the CD #1 of Red Hat Enterprise Linux 5 EM64T prior to install the Gigabit Ethernet driver.

1. You can find the Gigabit Ethernet driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.  

```
# mount /dev/dvd /mnt  
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```
2. Remove the OS built-in NIC driver  

```
# rmmmod e1000.ko
```
3. Change the directory to the driver source and install the driver  

```
# cd /tmp/src/  
# make install  
# insmod e1000.ko
```
4. Run the kudzu utility, it will auto detect the Gigabit Ethernet controller and help you to configure it.  

```
# kudzu
```
5. Restart the network service to bring up both of the network interfaces.



---

```
# service network restart
```

### **IOAT driver installation**

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
```

```
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp
```

```
# tar zxf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
```

```
# make install
```

4. Load the IOAT driver

```
# modprobe dca
```

```
# cd ioatdma
```

```
# insmod ioatdma.ko
```

```
# modprobe ioatdma
```

```
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### **RAID Utility Installation**

NOTE. Please install the [compat-libstdc++-296-2.96-138.i386.rpm](#) and [compat-libstdc++-33-3.2.3-61.i386.rpm](#) packages with the CD #3 of Red Hat Enterprise Linux 5 EM64T prior to install the RAID Web Console 2.

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R
```

```
/media/cdrecorder/app/r520/raid/Integrated_SAS/Linux/.
```

```
/tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v2_19_01.zip
```

```
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type **y** to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

### Red Hat Enterprise Linux 5.0 EM64T Installation (with Onboard SATA RAID)

Below information describes how to manually install Red Hat Enterprise Linux 5.0 EM64T on Altos R520 with onboard SATA RAID.

#### Drivers Required

For Red Hat Enterprise Linux 5.0 EM64T Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	09.32.0207.2008	EasyBUILD 8.0 build 100 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.6.5	EasyBUILD 8.0 build 100 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)

#### Software Required

The management utility of onboard SATA RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.19-01	EasyBUILD 8.0 build 100 (or later)

#### Configuring integrated SAS hardware RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.

#### Installation Tips

NOTE. There is no built-in driver for onboard SATA RAID in the Red Hat Enterprise Linux 5.0 EM64T. You need an external USB floppy drive for applying driver during the OS installation.

1. Since Red Hat Enterprise Linux 5.0 EM64T cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.

- 
2. Type **linux nostorage** when the prompt **boot:** appears at the start.
  3. Process the installation.
  4. Click "Add Device" when you see a screen with the button.
  5. Press F2 to select driver from floppy
  6. Please select the **sda** as the **Driver Disk Source**.
  7. After the driver is loaded, the list of all drivers will appear again.
  8. Scroll down the driver list and select LSI megasr Driver <version> in the list
  9. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
  10. At the package selection step, select **Software Development** for the installation package.
  11. Please follow the normal procedure to finish the installation.

### **Gigabit Ethernet Driver Installation**

NOTE. Please install the `kernel-devel-<version>` package with the CD #1 of Red Hat Enterprise Linux 5 EM64T prior to install the Gigabit Ethernet driver.

1. You can find the Gigabit Ethernet driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.  

```
# mount /dev/dvd /mnt  
  
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```
2. Remove the OS built-in NIC driver  

```
# rmmmod e1000.ko
```
3. Change the directory to the driver source and install the driver  

```
# cd /tmp/src/  
  
# make install  
  
# insmod e1000.ko
```
4. Run the kudzu utility, it will auto detect the Gigabit Ethernet controller and help you to configure it.  

```
# kudzu
```
5. Restart the network service to bring up both of the network interfaces.  

```
# service network restart
```

### **IOAT driver installation**

1. Please remove the old version of IOAT driver from the system manually.  

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
```

---

```
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
Copy the IOAT driver to /tmp
```

```
# cd /tmp
```

```
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
```

```
# make install
```

4. Load the IOAT driver

```
# modprobe dca
```

```
# cd ioatdma
```

```
# insmod ioatdma.ko
```

```
# modprobe ioatdma
```

```
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### **RAID Utility Installation**

NOTE. Please install the [compat-libstdc++-296-2.96-138.i386.rpm](#) and [compat-libstdc++-33-3.2.3-61.i386.rpm](#) packages with the CD #3 of Red Hat Enterprise Linux 5 EM64T prior to install the RAID Web Console 2.

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R
```

```
/media/cdrecorder/app/r520/raid/Integrated_SAS/Linux/.  
/tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v2_19_01.zip
```

```
# chmod 755 install.sh
```

```
# chmod 755 RunRPM.sh
```

```
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.

- 
- To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

## Red Hat Enterprise Linux 5.0 Installation (with integrated SAS hardware RAID)

Below information describes how to manually install Red Hat Enterprise Linux 5.0 on Altos R520 with integrated SAS hardware RAID.

### Drivers Required

For Red Hat Enterprise Linux 5.0 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	00.00.03.09	EasyBUILD 8.0 build 100 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.6.5	EasyBUILD 8.0 build 100 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)

### Software Required

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.19-01	EasyBUILD 8.0 build 100 (or later)

### Configuring integrated SAS hardware RAID

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

### Installation Tips

NOTE. There is no built-in driver for Integrated SAS hardware RAID in the Red Hat Enterprise Linux 5.0. You need an external USB floppy drive for applying driver during the OS installation.

- Since Red Hat Enterprise Linux 5.0 cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
- Type **linux dd** when the prompt **boot:** appears at the start.
- Please select the **sda** as the **Driver Disk Source**.
- Follow the instruction to load the integrated SAS hardware RAID driver

---

from the driver diskette.

5. At the package selection step, select **Software Development** for the installation package.
6. Please follow the normal procedure to finish the installation.

### **Gigabit Ethernet Driver Installation**

NOTE. Please install the `kernel-devel-<version>` package with the CD #1 of Red Hat Enterprise Linux 5 prior to install the Gigabit Ethernet driver.

1. You can find the Gigabit Ethernet driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
# mount /dev/dvd /mnt
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Remove the OS built-in NIC driver

```
# rmmmod e1000.ko
```

3. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
# make install
# insmod e1000.ko
```

4. Run the kudzu utility, it will auto detect the Gigabit Ethernet controller and help you to configure it.

```
# kudzu
```

5. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **IOAT driver installation**

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
Copy the IOAT driver to /tmp
# cd /tmp
# tar zxf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
```

---

```
# make install  
4. Load the IOAT driver  
  
# modprobe dca  
  
# cd ioatdma  
  
# insmod ioatdma.ko  
  
# modprobe ioatdma  
  
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### **RAID Utility Installation**

NOTE. Please install the [compat-libstdc++-296-2.96-138.i386.rpm](#) and [compat-libstdc++-33-3.2.3-61.i386.rpm](#) packages with the CD #2 of Red Hat Enterprise Linux 5 prior to install the RAID Web Console 2.

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder  
  
# cp -R  
/media/cdrecorder/app/r520/raid/Integrated_SAS/Linux/.  
/tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/  
  
# unzip ir3_Linux_RWC2_v2_19_01.zip  
  
# chmod 755 install.sh  
  
# chmod 755 RunRPM.sh  
  
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

### **Red Hat Enterprise Linux 5.0 Installation (with integrated SAS hardware RAID 2)**

Below information describes how to manually install Red Hat Enterprise Linux 5.0 on Altos R520 with integrated SAS hardware RAID 2.

#### **Drivers Required**

For Red Hat Enterprise Linux 5.0 Installation, the following device drivers are

required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	00.00.03.18	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	0.3.3.3	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)

### Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)

### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

### Installation Tips

NOTE. There is no built-in driver for Integrated SAS hardware RAID 2 in the Red Hat Enterprise Linux 5.0. You need an external USB floppy drive for applying driver during the OS installation.

1. Since Red Hat Enterprise Linux 5.0 cannot recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the integrated SAS hardware RAID 2 driver from the driver diskette.
5. At the package selection step, select **Software Development** for the installation package.
6. Please follow the normal procedure to finish the installation.

### Gigabit Ethernet Driver Installation

NOTE. Please install the `kernel-devel-<version>` package with the CD #1 of Red Hat Enterprise Linux 5 prior to install the Gigabit Ethernet driver.

1. You can find the Gigabit Ethernet driver in EasyBUILD. Please copy the



---

driver from the EasyBUILD to HDD first.

```
# mount /dev/dvd /mnt
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Remove the OS built-in NIC driver

```
# rmmmod e1000.ko
```

3. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
# make install
# insmod e1000.ko
```

4. Run the kudzu utility, it will auto detect the Gigabit Ethernet controller and help you to configure it.

```
# kudzu
```

5. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

**IOAT driver installation**

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
# make install
```

4. Load the IOAT driver

```
# modprobe dca
# cd ioatdma
# insmod ioatdma.ko
# modprobe ioatdma
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### RAID Utility Installation

NOTE. Please install the [compat-libstdc++-296-2.96-138.i386.rpm](#) and [compat-libstdc++-33-3.2.3-61.i386.rpm](#) packages with the CD #2 of Red Hat Enterprise Linux 5 prior to install the RAID Web Console 2.

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder  
  
# cp -R  
/media/cdrecorder/app/r520/raid/Integrated_SAS/Linux/.  
/tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/  
  
# unzip ir3_Linux_RWC2_v2_19_01.zip  
  
# chmod 755 install.sh  
  
# chmod 755 RunRPM.sh  
  
# ./install.sh
```

3. Type y to accept the license agree and select 1 for full installation.
4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

### Red Hat Enterprise Linux 5.0 Installation (with integrated SAS SW RAID)

Below information describes how to manually install Red Hat Enterprise Linux 5.0 on Altos R520 with integrated SAS SW RAID.

#### Drivers Required

For Red Hat Enterprise Linux 5.0 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	09.32.0207.2008	EasyBUILD 8.0 build 100 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.6.5	EasyBUILD 8.0 build 100 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

IOAT	2.15	EasyBUILD 8.0 build 200 (or later)
------	------	------------------------------------

### Software Required

The management utility of integrated SAS SW RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.19-01	EasyBUILD 8.0 build 100 (or later)

### Configuring integrated SAS hardware RAID

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

### Installation Tips

NOTE. There is no built-in driver for Integrated SAS SW RAID in the Red Hat Enterprise Linux 5.0. You need an external USB floppy drive for applying driver during the OS installation.

1. Since Red Hat Enterprise Linux 5.0 cannot recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
5. At the package selection step, select **Software Development** for the installation package.
6. Please follow the normal procedure to finish the installation.

### Gigabit Ethernet Driver Installation

NOTE. Please install the `kernel-devel-<version>` package with the CD #1 of Red Hat Enterprise Linux 5 prior to install the Gigabit Ethernet driver.

1. You can find the Gigabit Ethernet driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
# mount /dev/dvd /mnt
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Remove the OS built-in NIC driver

```
# rmmmod e1000.ko
```

3. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
# make install
```

---

```
# insmod e1000.ko
```

4. Run the kudzu utility, it will auto detect the Gigabit Ethernet controller and help you to configure it.

```
# kudzu
```

5. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **IOAT driver installation**

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
```

```
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp
```

```
# tar zxf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
```

```
# make install
```

4. Load the IOAT driver

```
# modprobe dca
```

```
# cd ioatdma
```

```
# insmod ioatdma.ko
```

```
# modprobe ioatdma
```

```
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### **RAID Utility Installation**

NOTE. Please install the [compat-libstdc++-296-2.96-138.i386.rpm](#) and [compat-libstdc++-33-3.2.3-61.i386.rpm](#) packages with the CD #2 of Red Hat Enterprise Linux 5 prior to install the RAID Web Console 2.

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R
/media/cdrecorder/app/r520/raid/Integrated_SAS/Linux/.
/tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v2_19_01.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agree and select 1 for full installation.

4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

### Red Hat Enterprise Linux 5.0 Installation (with Onboard SATA RAID)

Below information describes how to manually install Red Hat Enterprise Linux 5.0 on Altos R520 with onboard SATA RAID.

#### Drivers Required

For Red Hat Enterprise Linux 5.0 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	09.32.0207.2008	EasyBUILD 8.0 build 100 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.6.5	EasyBUILD 8.0 build 100 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)

#### Software Required

The management utility of Onboard SATA RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.19-01	EasyBUILD 8.0 build 100 (or later)

#### Configuring integrated SAS hardware RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.

---

## Installation Tips

NOTE. There is no built-in driver for onboard SATA RAID in the Red Hat Enterprise Linux 5.0. You need an external USB floppy drive for applying driver during the OS installation.

1. Since Red Hat Enterprise Linux 5.0 cannot recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux nostorage** when the prompt **boot:** appears at the start.
3. Process the installation.
4. Click "Add Device" when you see a screen with the button.
5. Press F2 to select driver from floppy
6. Please select the **sda** as the **Driver Disk Source**.
7. After the driver is loaded, the list of all drivers will appear again.
8. Scroll down the driver list and select LSI megasr Driver <version> in the list
9. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
10. At the package selection step, select **Software Development** for the installation package.
11. Please follow the normal procedure to finish the installation.

## Gigabit Ethernet Driver Installation

NOTE. Please install the `kernel-devel-<version>` package with the CD #1 of Red Hat Enterprise Linux 5 prior to install the Gigabit Ethernet driver.

1. You can find the Gigabit Ethernet driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
# mount /dev/dvd /mnt
```

```
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Remove the OS built-in NIC driver

```
# rmmmod e1000.ko
```

3. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

4. Run the kudzu utility, it will auto detect the Gigabit Ethernet controller and help you to configure it.

---

```
# kudzu
```

5. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **IOAT driver installation**

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
```

```
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp
```

```
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
```

```
# make install
```

4. Load the IOAT driver

```
# modprobe dca
```

```
# cd ioatdma
```

```
# insmod ioatdma.ko
```

```
# modprobe ioatdma
```

```
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### **RAID Utility Installation**

NOTE. Please install the [compat-libstdc++-296-2.96-138.i386.rpm](#) and [compat-libstdc++-33-3.2.3-61.i386.rpm](#) packages with the CD #2 of Red Hat Enterprise Linux 5 prior to install the RAID Web Console 2.

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R
```

```
/media/cdrecorder/app/r520/raid/Integrated_SAS/Linux/.
```

```
/tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v2_19_01.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

### **Red Hat Enterprise Linux 4.0 EM64T Update 3 Installation (with integrated SAS hardware RAID)**

Below information describes how to manually install Red Hat Enterprise Linux 4.0 EM64T Update 3 on Altos R520 with integrated SAS hardware RAID.

#### **Drivers Required**

For Red Hat Enterprise Linux 4.0 Update 3 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS hardware RAID	00.00.03.03	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

#### **Software Required**

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD.

<b>Software</b>	<b>Version</b>	<b>EasyBUILD Version</b>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

#### **Configuring integrated SAS hardware RAID**

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

#### **Installation Tips**

NOTE. There is no built-in driver Integrated SAS hardware RAID in the Red Hat Enterprise Linux 4.0 EM64T Update2. You need an external USB floppy drive to load driver during the OS installation.



- 
1. Since Red Hat Enterprise Linux 4.0 EM64T Update2 cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
  2. Type **linux dd** when the prompt **boot:** appears at the start.
  3. Please select the **sda** as the **Driver Disk Source**.
  4. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
  5. At the **Package Installation Defaults**, select **Customize software packages to be installed**.
  6. At the **Package Group Selection** step, select **Development Tools** under **Development**.
  7. Follow the normal procedure to finish the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the kudzu utility, it will auto detect the Intel 82563EB network controller and help you to configure it.

```
# kudzu
```

4. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v1.13-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreement and select 1 for full installation.
4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

## Red Hat Enterprise Linux 4.0 EM64T Update 3 Installation (with integrated SAS hardware RAID 2)

Below information describes how to manually install Red Hat Enterprise Linux 4.0 EM64T Update 3 on Altos R520 with integrated SAS hardware RAID 2.

### Drivers Required

For Red Hat Enterprise Linux 4.0 Update 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	00.00.03.18	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	0.3.3.3	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)

### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

### Installation Tips

NOTE. There is no built-in driver Integrated SAS hardware RAID 2 in the Red Hat Enterprise Linux 4.0 EM64T Update2. You need an external USB floppy drive to load driver during the OS installation.

1. Since Red Hat Enterprise Linux 4.0 EM64T Update2 cannot recognize the

---

integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD first before the installation.

2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the integrated SAS hardware RAID 2 driver from the driver diskette.
5. At the **Package Installation Defaults**, select **Customize software packages to be installed**.
6. At the **Package Group Selection** step, select **Development Tools** under **Development**.
7. Follow the normal procedure to finish the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the kudzu utility, it will auto detect the Intel 82563EB network controller and help you to configure it.

```
# kudzu
```

4. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v1.13-00.zip
```

```
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type **y** to accept the license agreement and select **1** for full installation.
4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

### **Red Hat Enterprise Linux 4.0 EM64T Update 3 Installation (with integrated SAS SW RAID)**

Below information describes how to manually install Red Hat Enterprise Linux 4.0 EM64T Update 3 on Altos R520 with integrated SAS SW RAID.

#### **Drivers Required**

For Red Hat Enterprise Linux 4.0 Update 3 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS SW RAID	06.06.0728.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

#### **Software Required**

The management utility of integrated SAS SW RAID can be found in the EasyBUILD.

<b>Software</b>	<b>Version</b>	<b>EasyBUILD Version</b>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

#### **Configuring integrated SAS SW RAID**

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

#### **Installation Tips**

NOTE. There is no built-in driver Integrated SAS SW RAID in the Red Hat Enterprise Linux 4.0 EM64T Update2. You need an external USB floppy drive to load driver during the OS installation.

1. Since Red Hat Enterprise Linux 4.0 EM64T Update2 cannot recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD first before the installation.

- 
2. Type **linux dd** when the prompt **boot:** appears at the start.
  3. Please select the **sda** as the **Driver Disk Source**.
  4. Follow the instruction to load the integrated SAS SW RAID driver from the driver diskette.
  5. At the **Package Installation Defaults**, select **Customize software packages to be installed**.
  6. At the **Package Group Selection** step, select **Development Tools** under **Development**.
  7. Follow the normal procedure to finish the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the kudzu utility, it will auto detect the Intel 82563EB network controller and help you to configure it.

```
# kudzu
```

4. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v1.13-00.zip
```

```
# chmod 755 install.sh
```

```
# chmod 755 RunRPM.sh
```

```
# ./install.sh
```

3. Type **y** to accept the license agreement and select **1** for full installation.
4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

## Red Hat Enterprise Linux 4.0 EM64T Update 3 Installation (with onboard SATA RAID)

Below information describes how to manually install Red Hat Enterprise Linux 4.0 EM64T Update 3 on Altos R520 with onboard SATA RAID.

### Drivers Required

For Red Hat Enterprise Linux 4.0 Update 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Onboard SATA RAID	06.06.0728.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of onboard SATA RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

### Configuring onboard SATA RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.

### Installation Tips

NOTE. There is no built-in driver Onboard SATA RAID in the Red Hat Enterprise Linux 4.0 EM64T Update2. You need an external USB floppy drive to load driver during the OS installation.

1. Since Red Hat Enterprise Linux 4.0 EM64T Update2 cannot recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the onboard SATA RAID driver from the

---

driver diskette.

5. At the **Package Installation Defaults**, select **Customize software packages to be installed**.
6. At the **Package Group Selection** step, select **Development Tools** under **Development**.
7. Follow the normal procedure to finish the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the kudzu utility, it will auto detect the Intel 82563EB network controller and help you to configure it.

```
# kudzu
```

4. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v1.13-00.zip
```

```
# chmod 755 install.sh
```

```
# chmod 755 RunRPM.sh
```

```
# ./install.sh
```

3. Type y to accept the license agreement and select 1 for full installation.

4. To start RAID Web Console 2 on, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

### **Red Hat Enterprise Linux 4.0 Update 3 Installation (with integrated SAS hardware RAID)**

Below information describes how to manually install Red Hat Enterprise Linux 4.0 Update 3 on Altos R520 with integrated SAS hardware RAID.

#### **Drivers Required**

For Red Hat Enterprise Linux 4.0 Update 3 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS hardware RAID	00.00.03.03	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

#### **Software Required**

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD.

<b>Software</b>	<b>Version</b>	<b>EasyBUILD Version</b>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

#### **Configuring integrated SAS hardware RAID**

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

#### **Installation Tips**

NOTE. There is no built-in driver Integrated SAS hardware RAID in the Red Hat Enterprise Linux 4.0 Update2. You need an external USB floppy drive to load driver during the OS installation.

1. Since Red Hat Enterprise Linux 4.0 Update2 cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.



- 
5. At the **Package Installation Defaults**, select **Customize software packages to be installed**.
  6. At the **Package Group Selection** step, select **Development Tools** under **Development**.
  7. Follow the normal procedure to finish the installation.

#### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the kudzu utility, it will auto detect the Intel 82563EB network controller and help you to configure it.

```
# kudzu
```

4. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

#### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v1.13-00.zip
```

```
# chmod 755 install.sh
```

```
# chmod 755 RunRPM.sh
```

```
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

---

## Red Hat Enterprise Linux 4.0 Update 3 Installation (with integrated SAS hardware RAID 2)

Below information describes how to manually install Red Hat Enterprise Linux 4.0 Update 3 on Altos R520 with integrated SAS hardware RAID 2.

### Drivers Required

For Red Hat Enterprise Linux 4.0 Update 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	00.00.03.18	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	0.3.3.3	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)

### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

### Installation Tips

NOTE. There is no built-in driver Integrated SAS hardware RAID 2 in the Red Hat Enterprise Linux 4.0 Update2. You need an external USB floppy drive to load driver during the OS installation.

1. Since Red Hat Enterprise Linux 4.0 Update2 cannot recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the integrated SAS hardware RAID 2 driver from the driver diskette.
5. At the **Package Installation Defaults**, select **Customize software packages to be installed**.

- 
6. At the **Package Group Selection** step, select **Development Tools** under **Development**.
  7. Follow the normal procedure to finish the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the kudzu utility, it will auto detect the Intel 82563EB network controller and help you to configure it.

```
# kudzu
```

4. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v1.13-00.zip
```

```
# chmod 755 install.sh
```

```
# chmod 755 RunRPM.sh
```

```
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

## Red Hat Enterprise Linux 4.0 Update 3 Installation (with integrated SAS SW RAID)

Below information describes how to manually install Red Hat Enterprise Linux 4.0 Update 3 on Altos R520 with integrated SAS SW RAID.

### Drivers Required

For Red Hat Enterprise Linux 4.0 Update 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS SW RAID	06.06.0728.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of integrated SAS SW RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

### Configuring integrated SAS SW RAID

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

### Installation Tips

NOTE. There is no built-in driver Integrated SAS SW RAID in the Red Hat Enterprise Linux 4.0 Update2. You need an external USB floppy drive to load driver during the OS installation.

1. Since Red Hat Enterprise Linux 4.0 Update2 cannot recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the integrated SAS SW RAID driver from the driver diskette.
5. At the **Package Installation Defaults**, select **Customize software packages to be installed**.
6. At the **Package Group Selection** step, select **Development Tools** under

---

## Development.

7. Follow the normal procedure to finish the installation.

### Gigabit Ethernet Driver Installation

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the kudzu utility, it will auto detect the Intel 82563EB network controller and help you to configure it.

```
# kudzu
```

4. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### RAID Utility Installation

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder
```

```
# cp -R /media/cdrecorder/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v1.13-00.zip
```

```
# chmod 755 install.sh
```

```
# chmod 755 RunRPM.sh
```

```
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

## Red Hat Enterprise Linux 4.0 Update 3 Installation (with onboard SATA RAID)

Below information describes how to manually install Red Hat Enterprise Linux 4.0 Update 3 on Altos R520 with onboard SATA RAID.

### Drivers Required

For Red Hat Enterprise Linux 4.0 Update 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Onboard SATA RAID	06.06.0728.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of onboard SATA RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

### Configuring onboard SATA RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.

### Installation Tips

NOTE. There is no built-in driver Onboard SATA RAID in the Red Hat Enterprise Linux 4.0 Update2. You need an external USB floppy drive to load driver during the OS installation.

1. Since Red Hat Enterprise Linux 4.0 Update2 cannot recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Type **linux dd** when the prompt **boot:** appears at the start.
3. Please select the **sda** as the **Driver Disk Source**.
4. Follow the instruction to load the onboard SATA RAID driver from the driver diskette.
5. At the **Package Installation Defaults**, select **Customize software packages to be installed**.
6. At the **Package Group Selection** step, select **Development Tools** under **Development**.

- 
7. Follow the normal procedure to finish the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/  
# make install  
# insmod e1000.ko
```

3. Run the kudzu utility, it will auto detect the Intel 82563EB network controller and help you to configure it.

```
# kudzu
```

4. Restart the network service to bring up both of the network interfaces.

```
# service network restart
```

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/  
# unzip ir3_Linux_RWC2_v1.13-00.zip  
# chmod 755 install.sh  
# chmod 755 RunRPM.sh  
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, select **applications -> System Tools -> RAID Web Console 2 Startup UI**

### **SUSE Linux Enterprise Server 10 EM64T Installation (with integrated SAS hardware RAID)**

Below information describes how to manually install SUSE Linux Enterprise

Server 10 EM64T on Altos R520 with integrated SAS hardware RAID.

### Drivers Required

For SUSE Linux Enterprise Server 10 EM64T Installation, the following device drivers are required. The drivers can be found in the EasyBUILD 7.1 build 600 (or later)

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	00.00.03.07	EasyBUILD 7.1 build 600 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.3.15-NAPI	EasyBUILD 7.1 build 600 (or later)
Onboard VGA	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD 7.1 build 600 (or later).

Software	Version	EasyBUILD Version
RAID Web Console 2	1.19-00	EasyBUILD 7.1 build 600 (or later)

### Configuring integrated SAS hardware RAID

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

### Installation Tips

NOTE. The driver of Integrated SAS hardware RAID is required for the SUSE Linux Enterprise Server 10 EM64T installation. Please install an external USB floppy drive for applying driver during the OS installation.


1. Since SUSE Linux Enterprise Server 10 EM64T cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD 7.1 build 600 first before the installation.
2. Boot the system with SUSE Linux Enterprise Server 10 EM64T CD #1.
3. When you see the boot menu on the screen, select **Installation**. Then press **F5** and select **YES** for the driver loading in the installation. Press Enter to continue.
4. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
5. At the Installation Settings, select the Software and click on **Details**. Select "Package Groups" in the Filter drop-down menu, then click Development



-> sources to add **kernel** package. Select "Patterns" in the Filter drop-down menu, then add **C/C++ Compiler and Tools** packages.

6. Follow the instruction to complete the installation of CD #1.
7. Remove the driver diskette when system automatically reboot at the end of the installation process with CD #1.

NOTE: If the driver diskette is kept in the FDD, you would see below message even though you've inserted the installation CD #2. In this case, please press "Ctrl+Alt+F2" to switch to another terminal. Issue the "reboot" command to reboot the system. Then, remove the driver diskette and continue the installation.

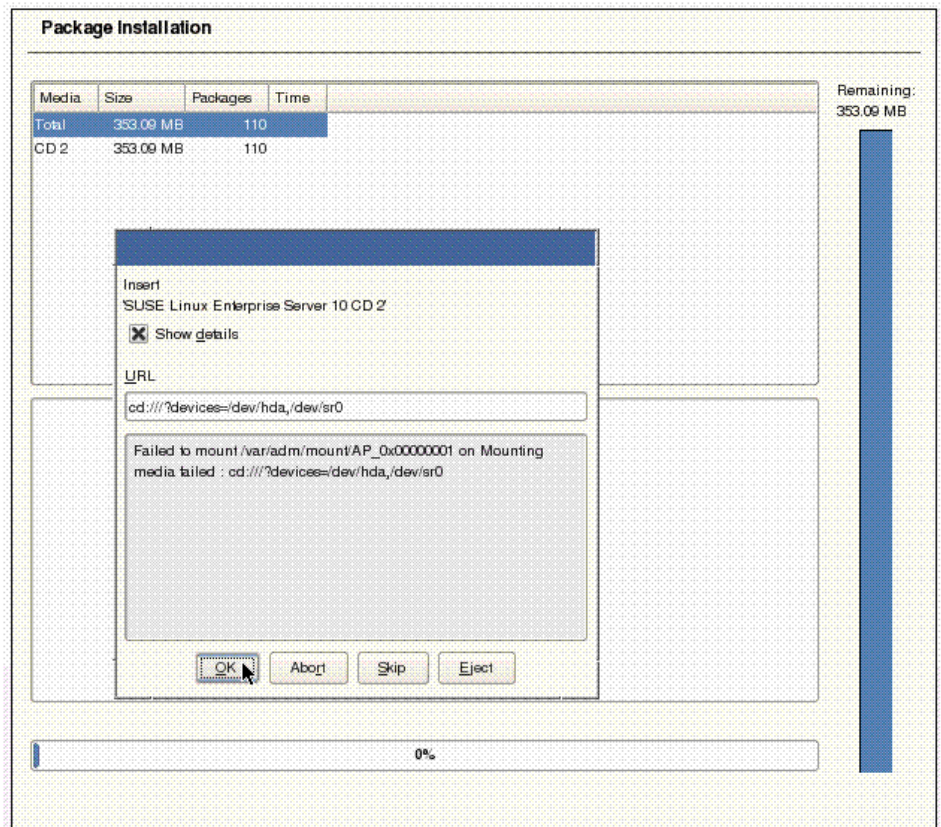

8. Follow the instruction to complete the installation with remained installation CDs.

### Gigabit Ethernet Driver Installation

1. You can find the Intel 82546EB driver in EasyBUILD 7.1. Please refer to directory of the 82546EB driver in Driver Required section above and copy the driver from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
```

```
# cp -R /media/dvdram/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

- 
2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/  
# make install  
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **IOAT driver installation**

NOTE. Please update the onboard Gigabit Ethernet driver to version 7.6.5 (or later) prior to install IOAT driver, you could found the driver from Acer GCSD website (<http://csd.acer.com.tw/SI/Download2006.nsf/ServerWeb>) or EasyBUILD 8.0 build 100 (or later).

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma  
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp  
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>  
# make install
```

4. Load the IOAT driver

```
# modprobe dca  
# cd ioatdma  
# insmod ioatdma.ko  
# modprobe ioatdma  
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

## RAID Utility Installation

1. You can find the RAID Web Console 2 in EasyBUILD 7.1. Please refer to the directory of the RAID Web Console 2 in Software Required section above and copy the utility from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram  
  
# cp -R /media/dvdram/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/  
  
# unzip ir3_Linux_RWC2_v1.19-00.zip  
  
# chmod 755 install.sh  
  
# chmod 755 RunRPM.sh  
  
# ./install.sh
```

3. Type y to accept the license agree and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

## SUSE Linux Enterprise Server 10 EM64T Installation (with integrated SAS hardware RAID 2)

Below information describes how to manually install SUSE Linux Enterprise Server 10 EM64T on Altos R520 with integrated SAS hardware RAID 2.

### Drivers Required

For SUSE Linux Enterprise Server 10 EM64T Installation, the following device drivers are required. The drivers can be found in the EasyBUILD 7.1 build 600 (or later)

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	00.00.03.18	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	0.3.3.3	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD 7.1 build 600 (or later).

Software	Version	EasyBUILD Version
----------	---------	-------------------

---

RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)
-----------------------	------	------------------------------------

### Configuring integrated SAS hardware RAID 2


Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

#### Installation Tips

NOTE. The driver of Integrated SAS hardware RAID 2 is required for the SUSE Linux Enterprise Server 10 EM64T installation. Please install an external USB floppy drive for applying driver during the OS installation.

1. Since SUSE Linux Enterprise Server 10 EM64T cannot recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD 7.1 build 600 first before the installation.
2. Boot the system with SUSE Linux Enterprise Server 10 EM64T CD #1.
3. When you see the boot menu on the screen, select **Installation**. Then press **F5** and select **YES** for the driver loading in the installation. Press Enter to continue.
4. Follow the instruction to load the integrated SAS hardware RAID 2 driver from the driver diskette.
5. At the Installation Settings, select the Software and click on **Details**. Select "Package Groups" in the Filter drop-down menu, then click Development -> sources to add **kernel** package. Select "Patterns" in the Filter drop-down menu, then add **C/C++ Compiler and Tools** packages.
6. Follow the instruction to complete the installation of CD #1.
7. Remove the driver diskette when system automatically reboot at the end of the installation process with CD #1.

NOTE: If the driver diskette is kept in the FDD, you would see below message even though you've inserted the installation CD #2. In this case, please press "Ctrl+Alt+F2" to switch to another terminal. Issue the "reboot" command to reboot the system. Then, remove the driver diskette and continue the installation.

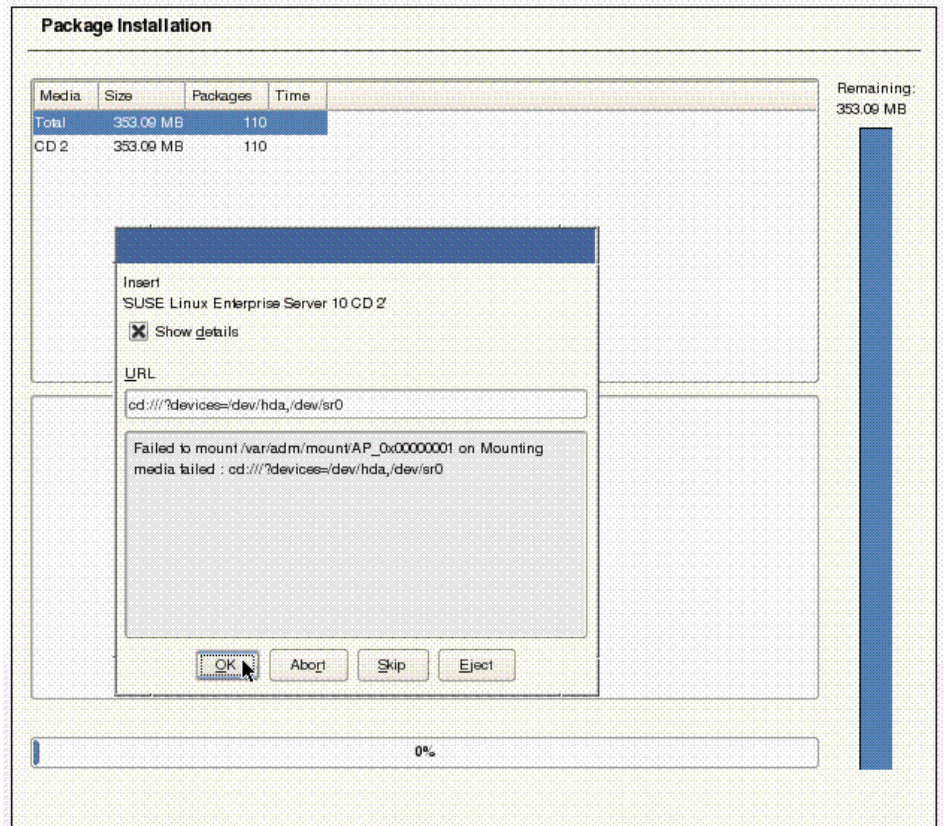

8. Follow the instruction to complete the installation with remained installation CDs.

### Gigabit Ethernet Driver Installation

1. You can find the Intel 82546EB driver in EasyBUILD 7.1. Please refer to directory of the 82546EB driver in Driver Required section above and copy the driver from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
```

```
# cp -R /media/dvdram/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

---

### IOAT driver installation

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
# make install
```

4. Load the IOAT driver

```
# modprobe dca
# cd ioatdma
# insmod ioatdma.ko
# modprobe ioatdma
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### RAID Utility Installation

1. You can find the RAID Web Console 2 in EasyBUILD 7.1. Please refer to the directory of the RAID Web Console 2 in Software Required section above and copy the utility from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
# cp -R /media/dvdram/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.19-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.

4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### **SUSE Linux Enterprise Server 10 EM64T Installation (with integrated SAS SW RAID)**

Below information describes how to manually install SUSE Linux Enterprise Server 10 EM64T on Altos R520 with integrated SAS SW RAID.

#### **Drivers Required**

For SUSE Linux Enterprise Server 10 EM64T Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS SW RAID	06.28.1110.2006	EasyBUILD 7.1 build 600 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.3.15-NAPI	EasyBUILD 7.1 build 600 (or later)
Onboard VGA	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in

#### **Software Required**

The management utility of integrated SAS SW RAID can be found in the EasyBUILD 7.1 build 600 (or later).

<b>Software</b>	<b>Version</b>	<b>EasyBUILD Version</b>
RAID Web Console 2	1.19-00	EasyBUILD 7.1 build 600 (or later)

#### **Configuring integrated SAS SW RAID**

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

#### **Installation Tips**

NOTE. The driver of Integrated SAS SW RAID is required for the SUSE Linux Enterprise Server 10 EM64T installation. Please install an external USB floppy drive for applying driver during the OS installation.

1. Since SUSE Linux Enterprise Server 10 EM64T cannot recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD 7.1 build 600 first before the installation.
2. Boot the system with SUSE Linux Enterprise Server 10 EM64T CD #1.
3. When you see the boot menu on the screen, select **Installation** and type "brokenmodules=ahci" string in the below text tab. Then press **F5** and select **YES** for the driver loading in the installation. Press Enter to

---

continue.

4. Follow the instruction to load the integrated SAS SW RAID driver from the driver diskette.
5. At the Installation Settings, select the Software and click on **Details**. Select "Package Groups" in the Filter drop-down menu, then click Development -> sources to add **kernel** package. Select "Patterns" in the Filter drop-down menu, then add **C/C++ Compiler and Tools** packages.
6. Follow the instruction to complete the installation of CD #1.
7. After system reboot, the following message would appears  
resume device /dev/sdb1 not found (ignoring)  
waiting for device /dev/sdb2 to appear.....not found -- exiting to  
/bin/sh  
\$

This is because during installation, the USB floppy device was recognized as sda, and the mass storage was recognized as sdb. After reboot, mass storage is now recognized as sda, but SuSE Linux still tries to load system files from sdb. To solve this issue, the grub menu list file and the fstab file needs to be modified.

8. At \$ prompt, type the following command to mount file system on mass storage:

```
$mount /dev/sda2 /tmp
```

Edit the grub menu list file to change all entries with sdb to sda:

```
$/tmp/bin/vi /tmp/boot/grub/menu.lst
```

Next, edit the fstab file to change all entries with sdb to sda and remove lines with floppy:

```
/tmp/bin/vi /tmp/etc/fstab
```

9. Press Ctrl-Alt-Del to reboot the system and remove the driver diskette.
10. Follow the instruction to complete the installation with remained installation CDs.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD 7.1. Please refer to directory of the 82546EB driver in Driver Required section above and copy the driver from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
```

```
# cp -R /media/dvdram/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```



---

```
# make install
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **IOAT driver installation**

NOTE. Please update the onboard Gigabit Ethernet driver to version 7.6.5 (or later) prior to install IOAT driver, you could found the driver from Acer GCSD website (<http://csd.acer.com.tw/SI/Download2006.nsf/ServerWeb>) or EasyBUILD 8.0 build 100 (or later).

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp
# tar zxf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
# make install
```

4. Load the IOAT driver

```
# modprobe dca
# cd ioatdma
# insmod ioatdma.ko
# modprobe ioatdma
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD 7.1. Please refer to the directory of the RAID Web Console 2 in Software Required section above and copy the utility from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
# cp -R /media/dvdram/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.19-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### SUSE Linux Enterprise Server 10 EM64T Installation (with onboard SATA RAID)

Below information describes how to manually install SUSE Linux Enterprise Server 10 EM64T on Altos R520 with onboard SATA RAID.

#### Drivers Required

For SUSE Linux Enterprise Server 10 EM64T Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Onboard SATA RAID	06.28.1110.2006	EasyBUILD 7.1 build 600 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.3.15-NAPI	EasyBUILD 7.1 build 600 (or later)
Onboard VGA	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in

#### Software Required

The management utility of onboard SATA RAID can be found in the EasyBUILD 7.1 build 600 (or later).

Software	Version	EasyBUILD Version
RAID Web Console 2	1.19-00	EasyBUILD 7.1 build 600 (or later)

#### Configuring onboard SATA RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.

---

## Installation Tips

NOTE. The driver of Onboard SATA RAID is required for the SUSE Linux Enterprise Server 10 EM64T installation. Please install an external USB floppy drive for applying driver during the OS installation.

1. Since SUSE Linux Enterprise Server 10 EM64T cannot recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD 7.1 build 600 first before the installation.
2. Boot the system with SUSE Linux Enterprise Server 10 EM64T CD #1.
3. When you see the boot menu on the screen, select **Installation** and type "brokenmodules=ahci" string in the below text tab. Then press **F5** and select **YES** for the driver loading in the installation. Press Enter to continue.
4. Follow the instruction to load the onboard SATA RAID driver from the driver diskette.
5. At the Installation Settings, select the Software and click on **Details**. Select "Package Groups" in the Filter drop-down menu, then click Development -> sources to add **kernel** package. Select "Patterns" in the Filter drop-down menu, then add **C/C++ Compiler and Tools** packages.
6. Follow the instruction to complete the installation of CD #1.
7. After system reboot, the following message would appears  
resume device /dev/sdb1 not found (ignoring)  
waiting for device /dev/sdb2 to appear.....not found -- exiting to  
/bin/sh  
\$

This is because during installation, the USB floppy device was recognized as sda, and the mass storage was recognized as sdb. After reboot, mass storage is now recognized as sda, but SuSE Linux still tries to load system files from sdb. To solve this issue, the grub menu list file and the fstab file needs to be modified.

8. At \$ prompt, type the following command to mount file system on mass storage:

```
$mount /dev/sda2 /tmp
```

Edit the grub menu list file to change all entries with sdb to sda:

```
$/tmp/bin/vi /tmp/boot/grub/menu.lst
```

Next, edit the fstab file to change all entries with sdb to sda and remove lines with floppy:

```
/tmp/bin/vi /tmp/etc/fstab
```

9. Press Ctrl-Alt-Del to reboot the system and remove the driver diskette.

- 
10. Follow the instruction to complete the installation with remained installation CDs.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD 7.1. Please refer to directory of the 82546EB driver in Driver Required section above and copy the driver from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram  
# cp -R /media/dvdram/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/  
# make install  
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **IOAT driver installation**

NOTE. Please update the onboard Gigabit Ethernet driver to version 7.6.5 (or later) prior to install IOAT driver, you could found the driver from Acer GCSD website (<http://csd.acer.com.tw/SI/Download2006.nsf/ServerWeb>) or EasyBUILD 8.0 build 100 (or later).

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma  
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
Copy the IOAT driver to /tmp  
# cd /tmp  
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>  
# make install
```

4. Load the IOAT driver

```
# modprobe dca
```

```
# cd ioatdma
# insmod ioatdma.ko
# modprobe ioatdma
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### RAID Utility Installation

1. You can find the RAID Web Console 2 in EasyBUILD 7.1. Please refer to the directory of the RAID Web Console 2 in Software Required section above and copy the utility from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
# cp -R /media/dvdram/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.19-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation (with integrated SAS hardware RAID)

Below information describes how to manually install SUSE Linux Enterprise Server 9 EM64T Service Pack 3 on Altos R520 with integrated SAS hardware RAID.

#### Drivers Required

For SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	00.00.03.03	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)

Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

### Configuring integrated SAS hardware RAID

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

### Installation Tips

NOTE. There is no built-in driver Integrated SAS hardware RAID in the SUSE Linux Enterprise Server 9 EM64T Service Pack 3. You need an external USB floppy drive to load driver during the OS installation.

1. Since SUSE Linux Enterprise Server 9 EM64T Service Pack 3 cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Boot the system from SUSE Linux Enterprise Server 9 EM64T Service Pack3 bootable CD.
3. When you see the boot menu on the screen, select **Installation**, press F6 then press Enter to continue.
4. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
5. Follow the instruction to change the CD to SUSE Linux Enterprise Server 9 EM64T CD #1.
6. At the Installation Settings, select the Software and click on **Detailed selection** to add **kernel-source** and **C/C++ Compiler and Tools** to install.
7. To add C/C++ compiler tools, please check **C/C++ Compiler and Tools** in the left window.
8. To add kernel-source, please select **Various Linux Tools** in the left window and check **kernel-source** in the right window.
9. After you add the **kernel-source** and **C/C++ Compiler and Tools**, please click on **Accept** and follow the instruction to complete the installation.

### Gigabit Ethernet Driver Installation

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the

---

driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
# make install
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt
# cp -R /mnt/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.13-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### **SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation (with integrated SAS hardware RAID 2)**

Below information describes how to manually install SUSE Linux Enterprise Server 9 EM64T Service Pack 3 on Altos R520 with integrated SAS hardware RAID 2.

#### **Drivers Required**

For SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	00.00.03.18	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	0.3.3.3	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)

### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

### Installation Tips

NOTE. There is no built-in driver Integrated SAS hardware RAID 2 in the SUSE Linux Enterprise Server 9 EM64T Service Pack 3. You need an external USB floppy drive to load driver during the OS installation.

1. Since SUSE Linux Enterprise Server 9 EM64T Service Pack 3 cannot recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Boot the system from SUSE Linux Enterprise Server 9 EM64T Service Pack 3 bootable CD.
3. When you see the boot menu on the screen, select **Installation**, press F6 then press Enter to continue.
4. Follow the instruction to load the integrated SAS hardware RAID 2 driver from the driver diskette.
5. Follow the instruction to change the CD to SUSE Linux Enterprise Server 9 EM64T CD #1.
6. At the Installation Settings, select the Software and click on **Detailed selection** to add **kernel-source** and **C/C++ Compiler and Tools** to install.
7. To add C/C++ compiler tools, please check **C/C++ Compiler and Tools** in the left window.
8. To add kernel-source, please select **Various Linux Tools** in the left window and check **kernel-source** in the right window.



- 
9. After you add the **kernel-source** and **C/C++ Compiler and Tools**, please click on **Accept** and follow the instruction to complete the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
# make install
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt
# cp -R /mnt/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.13-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### **SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation (with integrated SAS SW RAID)**

Below information describes how to manually install SUSE Linux Enterprise Server 9 EM64T Service Pack 3 on Altos R520 with integrated SAS SW RAID.

## Drivers Required

For SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS SW RAID	06.06.0728.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

## Software Required

The management utility of integrated SAS SW RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

## Configuring integrated SAS SW RAID

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

## Installation Tips

NOTE. There is no built-in driver Integrated SAS SW RAID in the SUSE Linux Enterprise Server 9 EM64T Service Pack 3. You need an external USB floppy drive to load driver during the OS installation.

1. Since SUSE Linux Enterprise Server 9 EM64T Service Pack 3 cannot recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Boot the system from SUSE Linux Enterprise Server 9 EM64T Service Pack 3 bootable CD.
3. When you see the boot menu on the screen, select **Installation**, type "brokenmodules=ahci" string in the below text tab, and press F6. Then press Enter to continue.
4. Follow the instruction to load the integrated SAS SW RAID driver from the driver diskette.
5. Follow the instruction to change the CD to SUSE Linux Enterprise Server 9 EM64T CD #1.
6. At the Installation Settings, select the Software and click on **Detailed selection** to add **kernel-source** and **C/C++ Compiler and Tools** to install.
7. To add C/C++ compiler tools, please check **C/C++ Compiler and Tools** in

---

the left window.

8. To add kernel-source, please select **Various Linux Tools** in the left window and check **kernel-source** in the right window.
9. After you add the **kernel-source** and **C/C++ Compiler and Tools**, please click on **Accept** and follow the instruction to complete the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt
```

```
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt
```

```
# cp -R /mnt/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v1.13-00.zip
```

```
# chmod 755 install.sh
```

```
# chmod 755 RunRPM.sh
```

```
# ./install.sh
```

3. Type **y** to accept the license agreeen and select **1** for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

## SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation (with onboard SATA RAID)

Below information describes how to manually install SUSE Linux Enterprise Server 9 EM64T Service Pack 3 on Altos R520 with onboard SATA RAID.

### Drivers Required

For SUSE Linux Enterprise Server 9 EM64T Service Pack 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Onboard SATA RAID	06.06.0728.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

### Software Required

The management utility of onboard SATA RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

### Configuring onboard SATA RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.

### Installation Tips

NOTE. There is no built-in driver Onboard SATA RAID in the SUSE Linux Enterprise Server 9 EM64T Service Pack 3. You need an external USB floppy drive to load driver during the OS installation.

1. Since SUSE Linux Enterprise Server 9 EM64T Service Pack 3 cannot recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Boot the system from SUSE Linux Enterprise Server 9 EM64T Service Pack 3 bootable CD.
3. When you see the boot menu on the screen, select **Installation**, type "brokenmodules=ahci" string in the below text tab, and press F6. Then press Enter to continue.
4. Follow the instruction to load the onboard SATA RAID driver from the driver diskette.
5. Follow the instruction to change the CD to SUSE Linux Enterprise Server 9 EM64T CD #1.

- 
6. At the Installation Settings, select the Software and click on **Detailed selection** to add **kernel-source** and **C/C++ Compiler and Tools** to install.
  7. To add C/C++ compiler tools, please check **C/C++ Compiler and Tools** in the left window.
  8. To add kernel-source, please select **Various Linux Tools** in the left window and check **kernel-source** in the right window.
  9. After you add the **kernel-source** and **C/C++ Compiler and Tools**, please click on **Accept** and follow the instruction to complete the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/  
# make install  
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/  
# unzip ir3_Linux_RWC2_v1.13-00.zip  
# chmod 755 install.sh  
# chmod 755 RunRPM.sh  
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.

- To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### **SUSE Linux Enterprise Server 10 Installation (with integrated SAS hardware RAID)**

Below information describes how to manually install SUSE Linux Enterprise Server 10 on Altos R520 with integrated SAS hardware RAID.

#### **Drivers Required**

For SUSE Linux Enterprise Server 10 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS hardware RAID	00.00.03.07	EasyBUILD 7.1 build 600 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.3.15-NAPI	EasyBUILD 7.1 build 600 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)

#### **Software Required**

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD 7.1 build 600 (or later).

<b>Software</b>	<b>Version</b>	<b>EasyBUILD Version</b>
RAID Web Console 2	1.19-00	EasyBUILD 7.1 build 600 (or later)

#### **Configuring integrated SAS hardware RAID**

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

#### **Installation Tips**


NOTE. The driver of Integrated SAS hardware RAID is required for the SUSE Linux Enterprise Server 10 EM64T installation. Please install an external USB floppy drive for applying driver during the OS installation.

- Since SUSE Linux Enterprise Server 10 cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD 7.1 build 600 first before the installation.
- Boot the system with SUSE Linux Enterprise Server 10 CD #1.
- When you see the boot menu on the screen, select **Installation**. Then press **F5** and select **YES** for the driver loading in the installation. Press Enter to

continue.

4. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
5. At the Installation Settings, select the Software and click on **Details**. Select "Package Groups" in the Filter drop-down menu, then click Development -> sources to add **kernel** package. Select "Patterns" in the Filter drop-down menu, then add **C/C++ Compiler and Tools** packages.
6. Follow the instruction to complete the installation of CD #1.
7. Remove the driver diskette when system automatically reboot at the end of the installation process with CD #1.

NOTE: If the driver diskette is kept in the FDD, you would see below message even though you've inserted the installation CD #2. In this case, please press "Ctrl+Alt+F2" to switch to another terminal. Issue the "reboot" command to reboot the system. Then, remove the driver diskette and continue the installation.

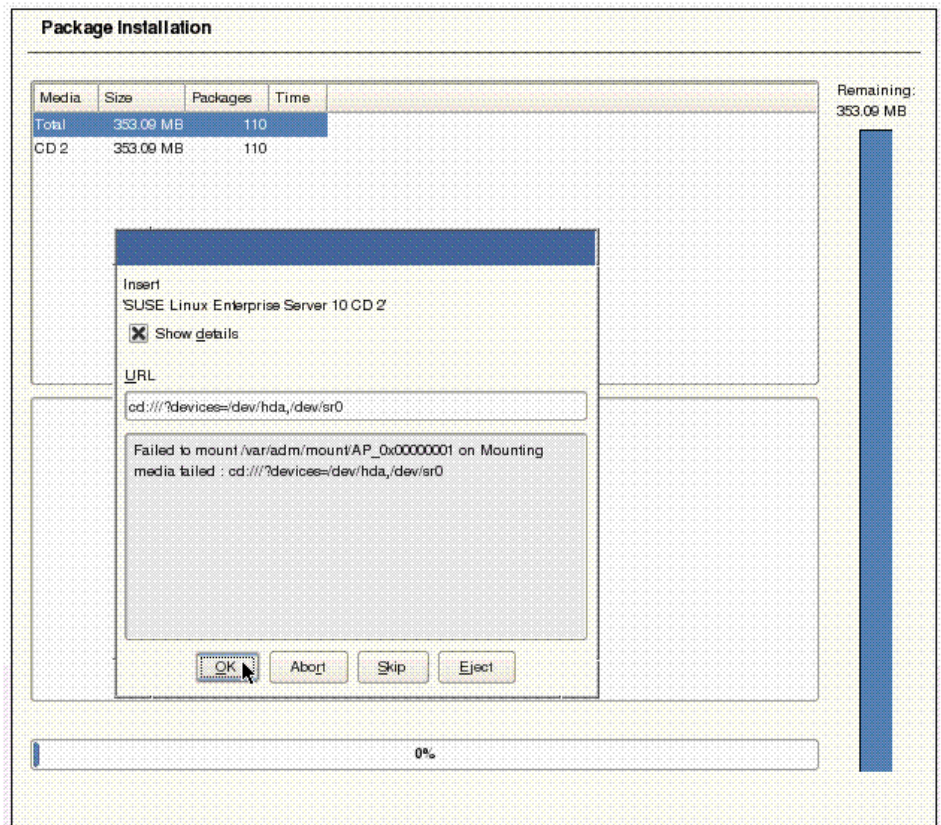

8. Follow the instruction to complete the installation with remained installation CDs.

---

## Gigabit Ethernet Driver Installation

1. You can find the Intel 82546EB driver in EasyBUILD 7.1. Please refer to directory of the 82546EB driver in Driver Required section above and copy the driver from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram  
# cp -R /media/dvdram/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/  
# make install  
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

## IOAT driver installation

NOTE. Please update the onboard Gigabit Ethernet driver to version 7.6.5 (or later) prior to install IOAT driver, you could found the driver from Acer GCSD website (<http://csd.acer.com.tw/SI/Download2006.nsf/ServerWeb>) or EasyBUILD 8.0 build 100 (or later).

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma  
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
Copy the IOAT driver to /tmp  
# cd /tmp  
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>  
# make install
```

4. Load the IOAT driver

```
# modprobe dca  
# cd ioatdma  
# insmod ioatdma.ko
```



```
# modprobe ioatdma
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### RAID Utility Installation

1. You can find the RAID Web Console 2 in EasyBUILD 7.1. Please refer to the directory of the RAID Web Console 2 in Software Required section above and copy the utility from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
# cp -R /media/dvdram/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.19-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agree and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### SUSE Linux Enterprise Server 10 Installation (with integrated SAS hardware RAID 2)

Below information describes how to manually install SUSE Linux Enterprise Server 10 on Altos R520 with integrated SAS hardware RAID 2.

#### Drivers Required

For SUSE Linux Enterprise Server 10 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	00.00.03.18	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	0.3.3.3	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)

## Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD 7.1 build 600 (or later).

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)

## Configuring integrated SAS hardware RAID 2


Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

## Installation Tips

NOTE. The driver of Integrated SAS hardware RAID 2 is required for the SUSE Linux Enterprise Server 10 EM64T installation. Please install an external USB floppy drive for applying driver during the OS installation.

1. Since SUSE Linux Enterprise Server 10 cannot recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD 7.1 build 600 first before the installation.
2. Boot the system with SUSE Linux Enterprise Server 10 CD #1.
3. When you see the boot menu on the screen, select **Installation**. Then press **F5** and select **YES** for the driver loading in the installation. Press Enter to continue.
4. Follow the instruction to load the integrated SAS hardware RAID 2 driver from the driver diskette.
5. At the Installation Settings, select the Software and click on **Details**. Select "Package Groups" in the Filter drop-down menu, then click Development -> sources to add **kernel** package. Select "Patterns" in the Filter drop-down menu, then add **C/C++ Compiler and Tools** packages.
6. Follow the instruction to complete the installation of CD #1.
7. Remove the driver diskette when system automatically reboot at the end of the installation process with CD #1.

NOTE: If the driver diskette is kept in the FDD, you would see below message even though you've inserted the installation CD #2. In this case, please press "Ctrl+Alt+F2" to switch to another terminal. Issue the "reboot" command to reboot the system. Then, remove the driver diskette and continue the installation.

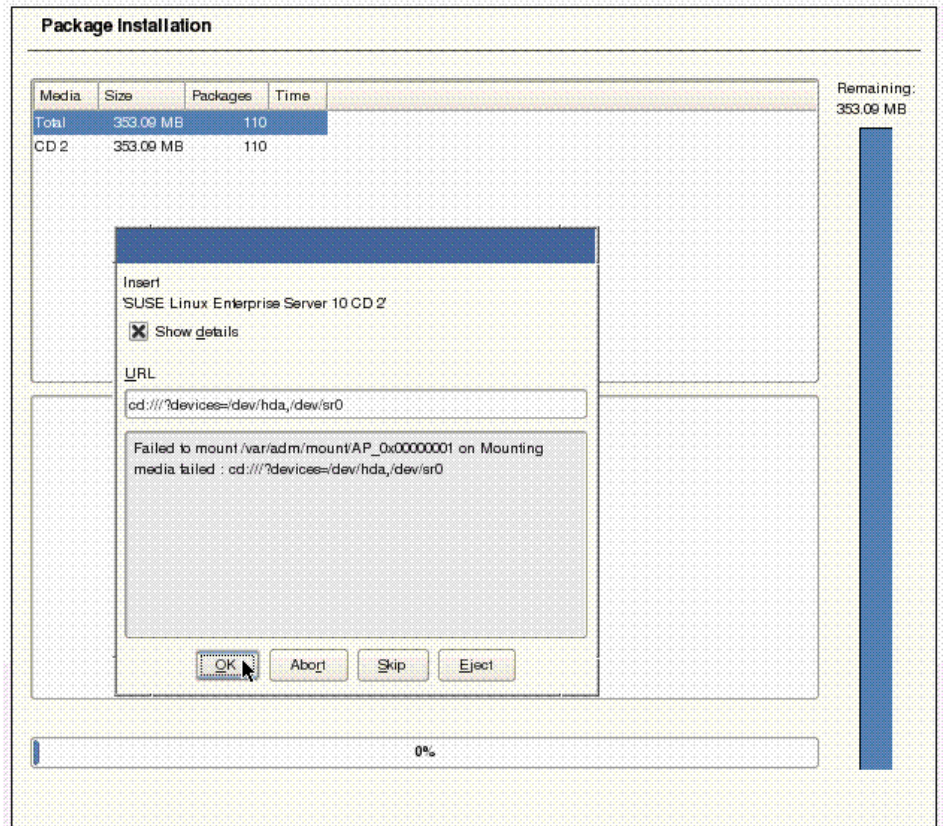

8. Follow the instruction to complete the installation with remained installation CDs.

### Gigabit Ethernet Driver Installation

1. You can find the Intel 82546EB driver in EasyBUILD 7.1. Please refer to directory of the 82546EB driver in Driver Required section above and copy the driver from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
# cp -R /media/dvdram/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
# make install
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

---

### IOAT driver installation

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp
# tar xzf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
# make install
```

4. Load the IOAT driver

```
# modprobe dca
# cd ioatdma
# insmod ioatdma.ko
# modprobe ioatdma
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### RAID Utility Installation

1. You can find the RAID Web Console 2 in EasyBUILD 7.1. Please refer to the directory of the RAID Web Console 2 in Software Required section above and copy the utility from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
# cp -R /media/dvdram/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.19-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.

- To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

## **SUSE Linux Enterprise Server 10 Installation (with integrated SAS SW RAID)**

Below information describes how to manually install SUSE Linux Enterprise Server 10 on Altos R520 with integrated SAS SW RAID.

### **Drivers Required**

For SUSE Linux Enterprise Server 10 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS SW RAID	06.28.1110.2006	EasyBUILD 7.1 build 600 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.3.15-NAPI	EasyBUILD 7.1 build 600 (or later)
Onboard VGA	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in

### **Software Required**

The management utility of integrated SAS SW RAID can be found in the EasyBUILD 7.1 build 600 (or later).

<b>Software</b>	<b>Version</b>	<b>EasyBUILD Version</b>
RAID Web Console 2	1.19-00	EasyBUILD 7.1 build 600 (or later)

### **Configuring integrated SAS SW RAID**

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

### **Installation Tips**

NOTE. The driver of Integrated SAS SW RAID is required for the SUSE Linux Enterprise Server 10 EM64T installation. Please install an external USB floppy drive for applying driver during the OS installation.

- Since SUSE Linux Enterprise Server 10 cannot recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD 7.1 build 600 first before the installation.
- Boot the system with SUSE Linux Enterprise Server 10 CD #1.
- When you see the boot menu on the screen, select **Installation** and type "brokenmodules=ahci" string in the below text tab. Then press **F5** and select **YES** for the driver loading in the installation. Press Enter to

---

continue.

4. Follow the instruction to load the integrated SAS SW RAID driver from the driver diskette.
5. At the Installation Settings, select the Software and click on **Details**. Select "Package Groups" in the Filter drop-down menu, then click Development -> sources to add **kernel** package. Select "Patterns" in the Filter drop-down menu, then add **C/C++ Compiler and Tools** packages.
6. Follow the instruction to complete the installation of CD #1.
7. After system reboot, the following message would appears  
resume device /dev/sdb1 not found (ignoring)  
waiting for device /dev/sdb2 to appear.....not found -- exiting to  
/bin/sh  
\$

This is because during installation, the USB floppy device was recognized as sda, and the mass storage was recognized as sdb. After reboot, mass storage is now recognized as sda, but SuSE Linux still tries to load system files from sdb. To solve this issue, the grub menu list file and the fstab file needs to be modified.

8. At \$ prompt, type the following command to mount file system on mass storage:

```
$mount /dev/sda2 /tmp
```

Edit the grub menu list file to change all entries with sdb to sda:

```
$/tmp/bin/vi /tmp/boot/grub/menu.lst
```

Next, edit the fstab file to change all entries with sdb to sda and remove lines with floppy:

```
/tmp/bin/vi /tmp/etc/fstab
```

9. Press Ctrl-Alt-Del to reboot the system and remove the driver diskette.
10. Follow the instruction to complete the installation with remained installation CDs.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD 7.1. Please refer to directory of the 82546EB driver in Driver Required section above and copy the driver from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
```

```
# cp -R /media/dvdram/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

---

```
# make install
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **IOAT driver installation**

NOTE. Please update the onboard Gigabit Ethernet driver to version 7.6.5 (or later) prior to install IOAT driver, you could found the driver from Acer GCSD website (<http://csd.acer.com.tw/SI/Download2006.nsf/ServerWeb>) or EasyBUILD 8.0 build 100 (or later).

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

Copy the IOAT driver to /tmp

```
# cd /tmp
# tar zxf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
# make install
```

4. Load the IOAT driver

```
# modprobe dca
# cd ioatdma
# insmod ioatdma.ko
# modprobe ioatdma
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD 7.1. Please refer to the directory of the RAID Web Console 2 in Software Required section above and copy the utility from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
# cp -R /media/dvdram/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.19-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### SUSE Linux Enterprise Server 10 Installation (with onboard SATA RAID)

Below information describes how to manually install SUSE Linux Enterprise Server 10 on Altos R520 with onboard SATA RAID.

#### Drivers Required

For SUSE Linux Enterprise Server 10 Installation, the following device drivers are required. The drivers can be found in the EasyBUILD 7.1 build 600 (or later).

Device	Version	EasyBUILD Version
Onboard SATA RAID	06.28.1110.2006	EasyBUILD 7.1 build 600 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.3.15-NAPI	EasyBUILD 7.1 build 600 (or later)
Onboard VGA	N/A	OS built-in
IOAT	2.15	EasyBUILD 8.0 build 200 (or later)
Onboard USB 2.0	N/A	OS built-in

#### Software Required

The management utility of onboard SATA RAID can be found in the EasyBUILD 7.1 build 600 (or later).

Software	Version	EasyBUILD Version
RAID Web Console 2	1.19-00	EasyBUILD 7.1 build 600 (or later)

#### Configuring onboard SATA RAID

Please refer to the Appendix C. for the onboard SATA RAID configuration.



---

## Installation Tips

NOTE. The driver of Onboard SATA RAID is required for the SUSE Linux Enterprise Server 10 EM64T installation. Please install an external USB floppy drive for applying driver during the OS installation.

1. Since SUSE Linux Enterprise Server 10 cannot recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD 7.1 build 600 first before the installation.
2. Boot the system with SUSE Linux Enterprise Server 10 CD #1.
3. When you see the boot menu on the screen, select **Installation** and type "brokenmodules=ahci" string in the below text tab. Then press **F5** and select **YES** for the driver loading in the installation. Press Enter to continue.
4. Follow the instruction to load the onboard SATA RAID driver from the driver diskette.
5. At the Installation Settings, select the Software and click on **Details**. Select "Package Groups" in the Filter drop-down menu, then click Development -> sources to add **kernel** package. Select "Patterns" in the Filter drop-down menu, then add **C/C++ Compiler and Tools** packages.
6. Follow the instruction to complete the installation of CD #1.
7. After system reboot, the following message would appears  
resume device /dev/sdb1 not found (ignoring)  
waiting for device /dev/sdb2 to appear.....not found -- exiting to  
/bin/sh  
\$

This is because during installation, the USB floppy device was recognized as sda, and the mass storage was recognized as sdb. After reboot, mass storage is now recognized as sda, but SuSE Linux still tries to load system files from sdb. To solve this issue, the grub menu list file and the fstab file needs to be modified.

8. At \$ prompt, type the following command to mount file system on mass storage:

```
$mount /dev/sda2 /tmp
```

Edit the grub menu list file to change all entries with sdb to sda:

```
$/tmp/bin/vi /tmp/boot/grub/menu.lst
```

Next, edit the fstab file to change all entries with sdb to sda and remove lines with floppy:

```
/tmp/bin/vi /tmp/etc/fstab
```

9. Press Ctrl-Alt-Del to reboot the system and remove the driver diskette.

- 
10. Follow the instruction to complete the installation with remained installation CDs.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD 7.1. Please refer to directory of the 82546EB driver in Driver Required section above and copy the driver from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
# cp -R /media/dvdram/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
# make install
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **IOAT driver installation**

NOTE. Please update the onboard Gigabit Ethernet driver to version 7.6.5 (or later) prior to install IOAT driver, you could found the driver from Acer GCSD website (<http://csd.acer.com.tw/SI/Download2006.nsf/ServerWeb>) or EasyBUILD 8.0 build 100 (or later).

1. Please remove the old version of IOAT driver from the system manually.

```
# cd /lib/modules/$(uname -r)/kernel/drivers/dma
# mv ioatdma.ko ioatdma.ko.bak
```

2. You can find the IOAT driver in EasyBUILD. Please copy the driver from the EasyBUILD to HDD first.

```
Copy the IOAT driver to /tmp
# cd /tmp
# tar zxf ioatdma-<ioat version>.tar.gz
```

3. Install the IOAT driver

```
# cd ioatdma-<ioat version>
# make install
```

4. Load the IOAT driver

```
# modprobe dca
```

```
# cd ioatdma
# insmod ioatdma.ko
# modprobe ioatdma
# ll /sys/class/dma/
```

When IOAT driver installation completed, you could see subdirectories and files for each subdirectory of /sys/class/dma folder.

### RAID Utility Installation

1. You can find the RAID Web Console 2 in EasyBUILD 7.1. Please refer to the directory of the RAID Web Console 2 in Software Required section above and copy the utility from the EasyBUILD 7.1 to HDD first.

```
# mount /media/dvdram
# cp -R /media/dvdram/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.19-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### SUSE Linux Enterprise Server 9 Service Pack 3 Installation (with integrated SAS hardware RAID)

Below information describes how to manually install SUSE Linux Enterprise Server 9 Service Pack 3 on Altos R520 with integrated SAS hardware RAID.

#### Drivers Required

For SUSE Linux Enterprise Server 9 Service Pack 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID	00.00.03.03	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in

Onboard USB 2.0	N/A	OS built-in
-----------------	-----	-------------

### Software Required

The management utility of integrated SAS hardware RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

### Configuring integrated SAS hardware RAID

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

### Installation Tips

NOTE. There is no built-in driver Integrated SAS hardware RAID in the SUSE Linux Enterprise Server 9 Service Pack 3. You need an external USB floppy drive to load driver during the OS installation.

NOTE. Before the installation, please disable the "Intel Speedstep technology" setting. You can find the option in BIOS setting -> Advanced -> Processor configuration -> Enhanced Intel Speedstep technology.

1. Since SUSE Linux Enterprise Server 9 Service Pack 3 cannot recognize the integrated SAS hardware RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Boot the system from SUSE Linux Enterprise Server 9 Service Pack3 bootable CD.
3. When you see the boot menu on the screen, select **Installation**, press F6 then press Enter to continue.
4. Follow the instruction to load the integrated SAS hardware RAID driver from the driver diskette.
5. Follow the instruction to change the CD to SUSE Linux Enterprise Server 9 CD #1.
6. At the Installation Settings, select the Software and click on **Detailed selection** to add **kernel-source** and **C/C++ Compiler and Tools** to install.
7. To add C/C++ compiler tools, please check **C/C++ Compiler and Tools** in the left window.
8. To add kernel-source, please select **Various Linux Tools** in the left window and check **kernel-source** in the right window.
9. After you add the **kernel-source** and **C/C++ Compiler and Tools**, please click on **Accept** and follow the instruction to complete the installation.

---

### Gigabit Ethernet Driver Installation

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt
```

```
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/
```

```
# make install
```

```
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### RAID Utility Installation

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt
```

```
# cp -R /mnt/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
```

```
# unzip ir3_Linux_RWC2_v1.13-00.zip
```

```
# chmod 755 install.sh
```

```
# chmod 755 RunRPM.sh
```

```
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### SUSE Linux Enterprise Server 9 Service Pack 3 Installation (with integrated SAS hardware RAID 2)

Below information describes how to manually install SUSE Linux Enterprise Server 9 Service Pack 3 on Altos R520 with integrated SAS hardware RAID 2.

## Drivers Required

For SUSE Linux Enterprise Server 9 Service Pack 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	00.00.03.18	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	0.3.3.3	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

## Software Required

The management utility of integrated SAS hardware RAID 2 can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	2.63	EasyBUILD 8.0 build 200 (or later)

## Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

## Installation Tips

NOTE. There is no built-in driver Integrated SAS hardware RAID 2 in the SUSE Linux Enterprise Server 9 Service Pack 3. You need an external USB floppy drive to load driver during the OS installation.

NOTE. Before the installation, please disable the "Intel Speedstep technology" setting. You can find the option in BIOS setting -> Advanced -> Processor configuration -> Enhanced Intel Speedstep technology.

1. Since SUSE Linux Enterprise Server 9 Service Pack 3 cannot recognize the integrated SAS hardware RAID 2, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Boot the system from SUSE Linux Enterprise Server 9 Service Pack3 bootable CD.
3. When you see the boot menu on the screen, select **Installation**, press F6 then press Enter to continue.
4. Follow the instruction to load the integrated SAS hardware RAID 2 driver from the driver diskette.
5. Follow the instruction to change the CD to SUSE Linux Enterprise Server 9 CD #1.

- 
6. At the Installation Settings, select the Software and click on **Detailed selection** to add **kernel-source** and **C/C++ Compiler and Tools** to install.
  7. To add C/C++ compiler tools, please check **C/C++ Compiler and Tools** in the left window.
  8. To add kernel-source, please select **Various Linux Tools** in the left window and check **kernel-source** in the right window.
  9. After you add the **kernel-source** and **C/C++ Compiler and Tools**, please click on **Accept** and follow the instruction to complete the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/  
# make install  
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/  
# unzip ir3_Linux_RWC2_v1.13-00.zip  
# chmod 755 install.sh  
# chmod 755 RunRPM.sh  
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.

- To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### **SUSE Linux Enterprise Server 9 Service Pack 3 Installation (with integrated SAS SW RAID)**

Below information describes how to manually install SUSE Linux Enterprise Server 9 Service Pack 3 on Altos R520 with integrated SAS SW RAID.

#### **Drivers Required**

For SUSE Linux Enterprise Server 9 Service Pack 3 Installation, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS SW RAID	06.06.0728.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

#### **Software Required**

The management utility of integrated SAS SW RAID can be found in the EasyBUILD.

Software	Version	EasyBUILD Version
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

#### **Configuring integrated SAS SW RAID**

Please refer to the Appendix B. for the integrated SAS SW RAID configuration.

#### **Installation Tips**

NOTE. There is no built-in driver Integrated SAS SW RAID in the SUSE Linux Enterprise Server 9 Service Pack 3. You need an external USB floppy drive to load driver during the OS installation.

- Since SUSE Linux Enterprise Server 9 Service Pack 3 cannot recognize the integrated SAS SW RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
- Boot the system from SUSE Linux Enterprise Server 9 Service Pack3 bootable CD.
- When you see the boot menu on the screen, select **Installation**, type "brokenmodules=ahci" string in the below text tab, and press F6. Then press Enter to continue.



- 
4. Follow the instruction to load the integrated SAS SW RAID driver from the driver diskette.
  5. Follow the instruction to change the CD to SUSE Linux Enterprise Server 9 CD #1.
  6. At the Installation Settings, select the Software and click on **Detailed selection** to add **kernel-source** and **C/C++ Compiler and Tools** to install.
  7. To add C/C++ compiler tools, please check **C/C++ Compiler and Tools** in the left window.
  8. To add kernel-source, please select **Various Linux Tools** in the left window and check **kernel-source** in the right window.
  9. After you add the **kernel-source** and **C/C++ Compiler and Tools**, please click on **Accept** and follow the instruction to complete the installation.

### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/  
# make install  
# insmod e1000.ko
```

3. Run the YaST2 utility.

```
# YaST2
```

4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/  
# unzip ir3_Linux_RWC2_v1.13-00.zip  
# chmod 755 install.sh
```

```
# chmod 755 RunRPM.sh
```

```
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### **SUSE Linux Enterprise Server 9 Service Pack 3 Installation (with onboard SATA RAID)**

Below information describes how to manually install SUSE Linux Enterprise Server 9 Service Pack 3 on Altos R520 with onboard SATA RAID.

#### **Drivers Required**

For SUSE Linux Enterprise Server 9 Service Pack 3 Installation, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Onboard SATA RAID	06.06.0728.2006	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	7.0.38-NAPI	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

#### **Software Required**

The management utility of onboard SATA RAID can be found in the EasyBUILD.

<b>Software</b>	<b>Version</b>	<b>EasyBUILD Version</b>
RAID Web Console 2	1.13-07	EasyBUILD 7.1 build 400 (or later)

#### **Configuring onboard SATA RAID**

Please refer to the Appendix C. for the onboard SATA RAID configuration.

#### **Installation Tips**

NOTE. There is no built-in driver Onboard SATA RAID in the SUSE Linux Enterprise Server 9 Service Pack 3. You need an external USB floppy drive to load driver during the OS installation.

1. Since SUSE Linux Enterprise Server 9 Service Pack 3 cannot recognize the onboard SATA RAID, you need to make a driver diskette from the EasyBUILD first before the installation.
2. Boot the system form SUSE Linux Enterprise Server 9 Service Pack3 bootable CD.

- 
3. When you see the boot menu on the screen, select **Installation**, type "brokenmodules=ahci" string in the below text tab, and press F6. Then press Enter to continue.
  4. Follow the instruction to load the onboard SATA RAID driver from the driver diskette.
  5. Follow the instruction to change the CD to SUSE Linux Enterprise Server 9 CD #1.
  6. At the Installation Settings, select the Software and click on **Detailed selection** to add **kernel-source** and **C/C++ Compiler and Tools** to install.
  7. To add C/C++ compiler tools, please check **C/C++ Compiler and Tools** in the left window.
  8. To add kernel-source, please select **Various Linux Tools** in the left window and check **kernel-source** in the right window.
  9. After you add the **kernel-source** and **C/C++ Compiler and Tools**, please click on **Accept** and follow the instruction to complete the installation.

#### **Gigabit Ethernet Driver Installation**

1. You can find the Intel 82546EB driver in EasyBUILD. Please refer to directory of the 82546EB driver in Driver Required section and copy the driver from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/Disk/R520/NIC/Intel/pro1000.lx/. /tmp
```

2. Change the directory to the driver source and install the driver

```
# cd /tmp/src/  
# make install  
# insmod e1000.ko
```

3. Run the YaST2 utility.  

```
# YaST2
```
4. Select **Network Devices -> Network Card**, it will auto detect the Intel 82563EB network controller and help you to configure it.

#### **RAID Utility Installation**

1. You can find the RAID Web Console 2 in EasyBUILD. Please copy the utility from the EasyBUILD to HDD first.

```
# mount /media/cdrecorder /mnt  
# cp -R /mnt/app/R520/raid/Integrated_SAS/Linux/. /tmp
```

2. Install RAID Web Console 2 utility

```
# cd /tmp/
# unzip ir3_Linux_RWC2_v1.13-00.zip
# chmod 755 install.sh
# chmod 755 RunRPM.sh
# ./install.sh
```

3. Type y to accept the license agreeen and select 1 for full installation.
4. To start RAID Web Console 2, click on start button, select **System -> More Programs -> RAID Web Console 2 Startup UI**

### **NetWare 6.5 SP5 Installation (with integrated SAS hardware RAID)**

Below information describes how to manually install NetWare 6.5 (Support Pack 5 overlay CD) on Altos R520 with integrated SAS hardware RAID.

#### **Drivers Required**

For NetWare 6.5 SP5 installation with integrated SAS hardware RAID, the following device drivers are required.

<b>Device</b>	<b>Version</b>	<b>EasyBUILD Version</b>
Integrated SAS hardware RAID	1.00.07	EasyBUILD 7.1 build 400 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	9.22	EasyBUILD 7.1 build 400 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

#### **Configuring integrated SAS hardware RAID**

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

#### **Installation Tips**

NOTE. There is no built-in driver of integrated SAS hardware RAID in the NetWare 6.5 SP5. You need an external USB floppy drive to load driver during the OS installation.

1. Make a driver diskette for integrated SAS hardware RAID and onboard Intel 82563EB Gigabit Ethernet from EasyBUILD.
2. Boot the system from the NetWare 6.5 SP5 OS CD.
3. At **Welcome to the NetWare 6.5 server installation** page, select **Manual** to install.
4. At **Prepare boot partition** page, create one 500 MB DOS partition.

- 
- When you see the following message, please select **Modify**. Then, move the cursor to **Storage adapters** and press **Enter**.

The following device drivers were detected for this server. Add, change, or delete device drivers as needed.

```
Device types          Driver names
-----
Storage adapters:    IDEATA, IDEATA, MEGA_SAS
```

- Please press **Delete** to delete MEGA\_SAS.HAM modules
- Then, press **INSERT** key to insert the integrated SAS hardware RAID driver. After the drivers are successfully loaded, please select **Return to driver summary**.
- Continue the installation.
- When you see the following message, please select **Modify**. Then, move the cursor to **Network boards** and press **Enter**.

The following device drivers were detected for this server. Add, change, or delete device drivers as needed.

```
Device types          Driver names
-----
Network boards:
NetWare Loadable Modules: (optional)
```

- Please press **INSERT** key to insert the onboard Intel 82563EB Gigabit Ethernet driver. After the drivers are successfully loaded, please select **Return to driver summary**.
- Then, you would see the following message. Please select **Continue**.

The following device drivers were detected for this server. Add, change, or delete device drivers as needed.

```
Device types          Driver names
-----
Network boards:      E1000E, E1000E
Network Loadable Modules: (optional)
```

- Please follow the normal procedures to complete the NetWare 6.5 installation.

## NetWare 6.5 SP5 Installation (with integrated SAS hardware RAID 2)

Below information describes how to manually install NetWare 6.5 (Support Pack 5 overlay CD) on Altos R520 with integrated SAS hardware RAID 2.

### Drivers Required

For NetWare 6.5 SP5 installation with integrated SAS hardware RAID 2, the following device drivers are required.

Device	Version	EasyBUILD Version
Integrated SAS hardware RAID 2	1.04.04	EasyBUILD 8.0 build 200 (or later)
Onboard Chipset	N/A	OS built-in
Onboard Gigabit Ethernet	10.45	EasyBUILD 8.0 build 200 (or later)
Onboard VGA	N/A	OS built-in
Onboard USB 2.0	N/A	OS built-in

### Configuring integrated SAS hardware RAID 2

Please refer to the APPENDIX D. for the integrated SAS hardware RAID 2 configuration.

### Installation Tips

NOTE. There is no built-in driver of integrated SAS hardware RAID 2 in the NetWare 6.5 SP5. You need an external USB floppy drive to load driver during the OS installation.

1. Make a driver diskette for integrated SAS hardware RAID 2 and onboard Intel 82563EB Gigabit Ethernet from EasyBUILD.
2. Boot the system from the NetWare 6.5 SP5 OS CD.
3. At **Welcome to the NetWare 6.5 server installation** page, select **Manual** to install.
4. At **Prepare boot partition** page, create one 500 MB DOS partition.
5. When you see the following message, please select **Modify**. Then, move the cursor to **Storage adapters** and press **Enter**.

```
The following device drivers were detected for this
server. Add, change, or delete device drivers as
needed.
```

```
Device types                Driver names
-----
Storage adapters:          IDEATA, IDEATA, IDEATA
```

6. Please press **Delete** to delete below module

IDEATA.HAM Standard ATA/IDE RAID Adapter

7. Then, press **INSERT** key to insert the integrated SAS hardware RAID 2 driver. After the drivers are successfully loaded, please select Return to driver summary.
8. Continue the installation.
9. When you see the following message, please select Modify. Then, move the cursor to Network boards and press **Enter**.

The following device drivers were detected for this server. Add, change, or delete device drivers as needed.

```
Device types                Driver names
-----
Network boards:
NetWare Loadable Modules: (optional)
```

10. Please press **INSERT** key to insert the onboard Intel 82563EB Gigabit Ethernet driver. After the drivers are successfully loaded, please select Return to driver summary.
11. Then, you would see the following message. Please select Continue.

The following device drivers were detected for this server. Add, change, or delete device drivers as needed.

```
Device types                Driver names
-----
Network boards:            E1000E, E1000E
Network Loadable Modules: (optional)
```

12. Please follow the normal procedures to complete the NetWare 6.5 installation.

### **VMware ESX Server 3.5 (with integrated SAS hardware RAID)**

Below information describes how to manually install VMware ESX Server 3.5 on Altos R520 with integrated SAS hardware RAID.

#### **Drivers Required**

Please use VMware ESX Server 3.5 built-in drivers for the installation on Altos R520.

Device	Version	EasyBUILD Version
Onboard VGA	N/A	OS Built-in
Onboard Chipset	N/A	OS Built-in

Integrated SAS hardware RAID	00.00.03.09	OS Built-in
Onboard Gigabit Ethernet	7.3.15	OS Built-in
SAS Hot-swap backplane	N/A	OS Built-in

### Configuring integrated SAS hardware RAID

Please refer to the Appendix A. for the integrated SAS hardware RAID configuration.

### Installation Tips

1. Please use the built-in driver of VMware ESX Server 3.5 to install the OS.
2. Boot the system with VMware ESX Server 3.5 CD
3. When "boot : " prompted, press Enter to continue.
4. Select your Keyboard.
5. Select your mouse.
6. Accept the VMware license agreement.
7. Select a partitioning option.
  - Recommended – Configures default partitions, based on the capacity of the hard drive.
  - Advanced – You specify all partition settings.
8. Select how the ESX Server will boot in Advanced Options.

NOTE: VMware recommends to keep the default setting of "Form a drive (install on the MBR of the drive)" option.
9. Configure the ESX Server host network IP address.

NOTE: VMware recommends that you use a static IP address to simplify client access.
10. Follow the instruction to complete the installation of the VMware ESX Server 3.5.

### Downloading the VMware Infrastructure Client


1. When the installation is completed, boot the system into VMware ESX Server 3.5. The below message displayed:

To manage this ESX Server, use any browser to open the URL

`http://<IP address of the ESX Server>/`
2. Please remotely connect the ESX Server from a console system by typing in the IP address of the ESX Server with web browser.
3. When you login, please click "Download VMware Infrastructure




Client” to download the VMware Infrastructure Client utility.

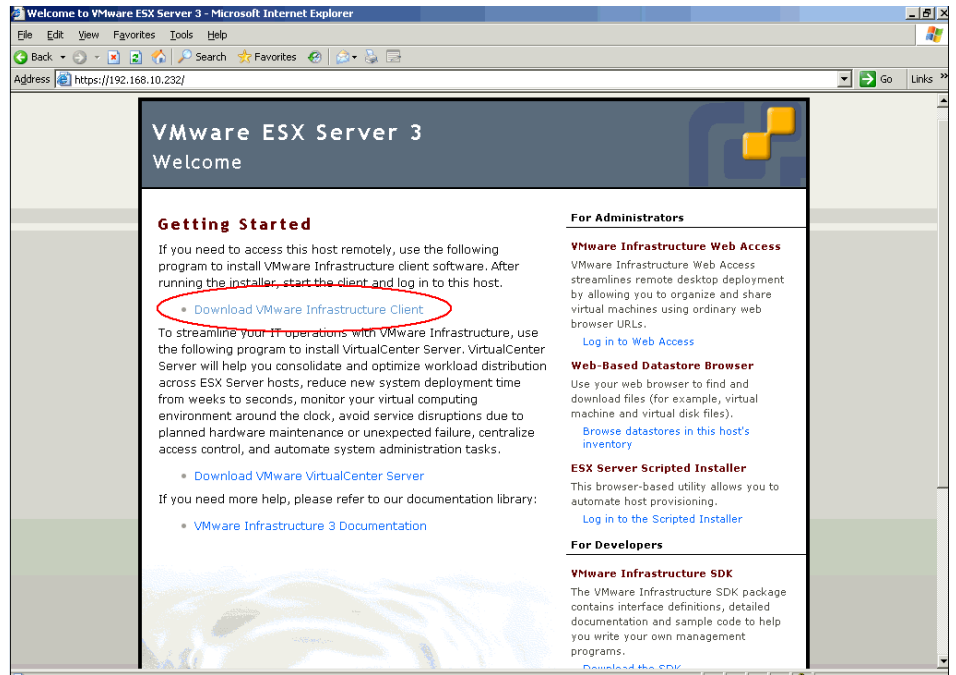


### VMware Infrastructure Client Installation on Windows

1. To install the VMware Infrastructure Client utility on your console system.
2. Launch VMware Infrastructure Client utility.

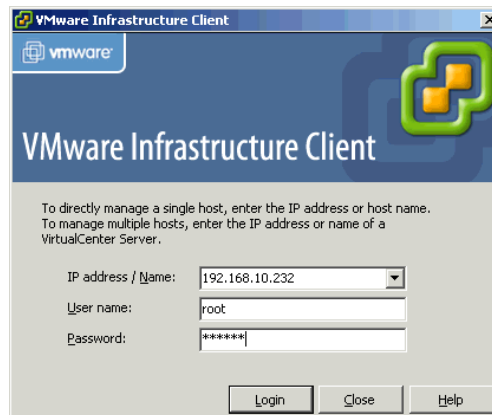

3. Now, you can manage the ESX Server or create virtual machines with the VMware Infrastructure Client utility.

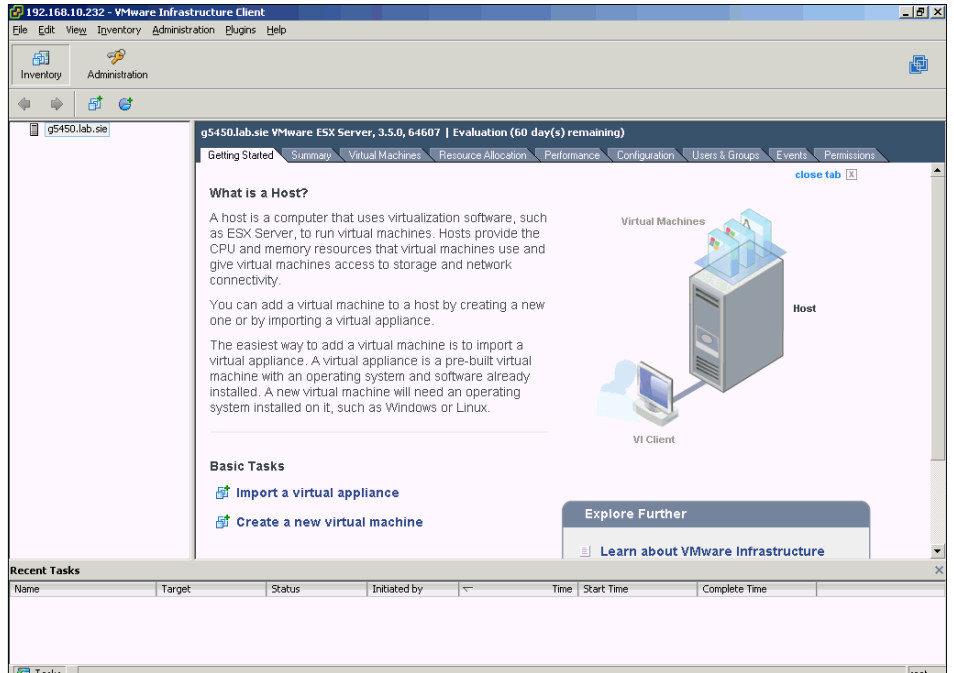

---

## APPENDIX A: INTEGRATED SAS HARDWARE RAID CREATION

### Configuring integrated SAS hardware RAID

This section briefly shows how to create RAID volume with integrated SAS hardware RAID when the hardware RAID components: RAID activation key and RAID cache, are installed.

#### Load BIOS default setting

1. Power on the server to start the system POST (Power On Self Test) process. During boot up, press <F2> to enter the BIOS setup screen.
2. Press <F9> to load BIOS default setting and press <F10> save the configuration changes and exit setup.

#### Enter the integrated SAS hardware RAID Configuration Utility

When you see the RAID Controller BIOS Version information shows on the screen during the POST (Power-On Self Test), press <Ctrl> + <G> to enter the Intel RAID BIOS Console Virtual Configuration.

When the Adapter Selection page displayed on the screen, please click on **Start** to continue.

#### Loading Factory Default Setting

3. In the left panel, select **Adapter Properties**. The current adapter settings will be listed. Please click on **Next** to change the setting.
4. Change the setting of **Set Factory Defaults** from **No** to **Yes** then click on **submit**.
5. Press **Ctrl+Alt+Del** to reboot the server.

#### Creating and Initialing a RAID Volume

6. In the left panel , select **Configuration Wizard**
7. Select **Add Configuration** (default) and click on **Next**.
8. Select **Custom Configuration** (default) and click on **Next**.
9. Select the drives that you want to add into the array with **Ctrl** key. Click on **Accept DG** then **Next**.
10. Select the **RAID Level** you want to configure. Create the logical volume by specify the size at **Select Size** and click on **Accept** to create the logical volume.
11. The RAID volume is created, click on **Accept** and **Yes** to save the configuration.
12. Select **Fast Initialize** and click on **Go** to initialize the new logical drives. You will see all the logical drives listed.
13. Click on **Home** to go back to the configuration menu.
14. Select **Exit**, click on **Yes** and press **Ctrl+Alt+Del** to reboot the system.

---

Now you can reboot the system and install the Operating System

**Assigning a Hot Spare Disk**

15. Insert an additional SAS HDD.
16. Enter the Intel RAID BIOS Console Virtual Configuration
17. Select a free disk marked as **UNCONF GOOD** and listed under **Physical Drives**.
18. Select **Make Global Dedicated HSP** or **Make Dedicated DSP** and click on **Go**.
19. Click on **Home** to go back to the configuration menu. You will see the disk marked as **Hotsapare** in pink and listed under Physical Drives.

---

## APPENDIX B: INTEGRATED SAS SW RAID CREATION

### Configuring the integrated SAS SW RAID

This section briefly shows how to create RAID 1 (mirror) volume with integrated SAS SW RAID function.

#### Load BIOS default setting

20. Power on the server to start the system POST (Power On Self Test) process. During boot up, press <F2> to enter the BIOS setup screen.
21. Press <F9> to load BIOS default setting and press <F10> save the configuration changes and exit setup.

#### Enable integrated SAS SW RAID function

22. In the BIOS Setup Utility, move cursor to <Advanced>. Then select <Mass Storage Controller> and press Enter.
23. Move cursor to Configure SAS as SW RAID and press Enter to change the Options to [Enabled]
24. Press <F10> save the configuration changes and exit setup.

#### Enter the integrated SAS SW RAID Configuration Utility

When you see the Intel Embedded Server RAID Technology II information shows on the screen during the POST (Power-On Self Test), press <Ctrl> + <E> to enter the Embedded RAID II Configuration Utility.

#### Loading integrated SAS SW RAID default setting

25. Select Objects from Management menu.
26. Select Adapter from Objects. The selectable adapter will be listed.
27. Press Enter on the adapter and the adapter setting will be shown on the screen. You can change the setting from this menu.
28. Select Factory Default and YES to load the default settings.
29. Exit the configuration utility and press <Ctrl> + <Alt> + <Del> to reboot the server.

#### Create RAID 1 volume

30. Select Configuration from Management Menu.
31. Select New Configuration from the Configuration menu and select YES to continue. An array selection menu displays the devices connected to the current controller.
32. Press the arrow keys to choose specific physical drives and press spacebar to associate the selected drive with the current array. The indicator for selected drive change from READY to ONLINE
33. Add 2 drives to current array and press <Enter> to finish creating current array.

- 
34. Press Enter again to select array to configure.
  35. Press spacebar to select the array and press <F10> to configure the logical drive
  36. The default RAID level for 2 disk drives is RAID1. Just select Accept to use the default setting and press <Enter> to return to the ARRAY SELECTION MENU.
  37. Press <Enter> to end the array configuration.
  38. Select YES to Save Configuration and press any key to return to the Configure menu.

#### **Initial RAID Volume**

39. Press <Esc> to return to the Management Menu.
40. Select Initialize from Management menu. All logical drives should be listed under Logical Drives.
41. Press <Spacebar> to select drives for initialization. The selected drive will be shown in yellow.
42. After selecting the drives, press <F10> and select YES to start the initialization process.
43. When initialization is complete, press any key to continue.
44. Press <Esc> to return to the Management Menu.

#### **Save and Exit Embedded RAID II Configuration Utility**

45. When RAID configuration and initialization is complete, press <Esc> in the Management Menu and select YES to exit the Embedded RAID Configuration Utility.
46. Press <Ctrl> + <Alt> + <Del> to reboot the server.

---

## APPENDIX C: ONBOARD SATA RAID CREATION

### Configuring the onboard SATA RAID

This section briefly shows how to create RAID 1 (mirror) volume with onboard SATA RAID function.

#### Load BIOS default setting

1. Power on the server to start the system POST (Power On Self Test) process. During boot up, press <F2> to enter the BIOS setup screen.
2. Press <F9> to load BIOS default setting and press <F10> save the configuration changes and exit setup.

#### Enable onboard SATA RAID function

3. In the BIOS Setup Utility, move cursor to <Advanced>. Then select <ATA Controller> and press Enter.
4. Move cursor to Configure SATA as RAID and press Enter to change the Options to [Enabled]
5. Press <F10> save the configuration changes and exit setup.

#### Enter the onboard SATA RAID Configuration Utility

When you see the Intel Embedded Server RAID Technology II information shows on the screen during the POST (Power-On Self Test), press <Ctrl> + <E> to enter the Embedded RAID II Configuration Utility.

#### Loading onboard SATA RAID default setting

6. Select Objects from Management menu.
7. Select Adapter from Objects. The selectable adapter will be listed.
8. Press Enter on the adapter and the adapter setting will be shown on the screen. You can change the setting from this menu.
9. Select Factory Default and YES to load the default settings.
10. Exit the configuration utility and press <Ctrl> + <Alt> + <Del> to reboot the server.

#### Create RAID 1 volume

11. Select Configuration from Management Menu.
12. Select New Configuration from the Configuration menu and select YES to continue. An array selection menu displays the devices connected to the current controller.
13. Press the arrow keys to choose specific physical drives and press spacebar to associate the selected drive with the current array. The indicator for selected drive change from READY to ONLINE
14. Add 2 drives to current array and press <Enter> to finish creating current array.

- 
15. Press Enter again to select array to configure.
  16. Press spacebar to select the array and press <F10> to configure the logical drive
  17. The default RAID level for 2 disk drives is RAID1. Just select Accept to use the default setting and press <Enter> to return to the ARRAY SELECTION MENU.
  18. Press <Enter> to end the array configuration.
  19. Select YES to Save Configuration and press any key to return to the Configure menu.

#### **Initial RAID Volume**

20. Press <Esc> to return to the Management Menu.
21. Select Initialize from Management menu. All logical drives should be listed under Logical Drives.
22. Press <Spacebar> to select drives for initialization. The selected drive will be shown in yellow.
23. After selecting the drives, press <F10> and select YES to start the initialization process.
24. When initialization is complete, press any key to continue.
25. Press <Esc> to return to the Management Menu.

#### **Save and Exit Embedded RAID II Configuration Utility**

26. When RAID configuration and initialization is complete, press <Esc> in the Management Menu and select YES to exit the Embedded RAID Configuration Utility.
27. Press <Ctrl> + <Alt> + <Del> to reboot the server.



---

## APPENDIX D: INTEGRATED SAS HARDWARE RAID 2 CREATION

### Configuring integrated SAS hardware RAID 2

This section briefly shows how to create RAID volume with integrated SAS hardware RAID 2 when the hardware RAID components: RAID activation key and RAID cache, are installed.

#### Load BIOS default setting

1. Power on the server to start the system POST (Power On Self Test) process. During boot up, press <F2> to enter the BIOS setup screen.
2. Press <F9> to load BIOS default setting and press <F10> save the configuration changes and exit setup.

#### Enter the integrated SAS hardware RAID 2 Configuration Utility

When you see the RAID Controller BIOS Version information shows on the screen during the POST (Power-On Self Test), press <Ctrl> + <G> to enter the Intel RAID BIOS Console Virtual Configuration.

When the Adapter Selection page displayed on the screen, please click on **Start** to continue.

#### Loading Factory Default Setting

3. In the left panel, select **Adapter Properties**. The current adapter settings will be listed. Please click on **Next** to change the setting.
4. Change the setting of **Set Factory Defaults** from **No** to **Yes** then click on **submit**.
5. Press **Ctrl+Alt+Del** to reboot the server.

#### Creating and Initialing a RAID Volume

6. In the left panel , select **Configuration Wizard**
7. Select **Add Configuration** (default) and click on **Next**.
8. Select **Custom Configuration** (default) and click on **Next**.
9. Select the drives that you want to add into the array with **Ctrl** key. Click on **Accept DG** then **Next**.
10. Select the **RAID Level** you want to configure. Create the logical volume by specify the size at **Select Size** and click on **Accept** to create the logical volume.
11. The RAID volume is created, click on **Accept** and **Yes** to save the configuration.
12. Select **Fast Initialize** and click on **Go** to initialize the new logical drives. You will see all the logical drives listed.
13. Click on **Home** to go back to the configuration menu.
14. Select **Exit**, click on **Yes** and press **Ctrl+Alt+Del** to reboot the system.

---

Now you can reboot the system and install the Operating System

**Assigning a Hot Spare Disk**

15. Insert an additional SAS HDD.
16. Enter the Intel RAID BIOS Console Virtual Configuration
17. Select a free disk marked as **UNCONF GOOD** and listed under **Physical Drives**.
18. Select **Make Global Dedicated HSP** or **Make Dedicated DSP** and click on **Go**.
19. Click on **Home** to go back to the configuration menu. You will see the disk marked as **Hotsapare** in pink and listed under Physical Drives.