

How to Update the Firmware of an SA50 using the Patch (.PCH) file method.

1. To check the firmware version of your SA50, please check the Bottom right hand Corner of your screen of the System Administrator->Services window:-

The screenshot shows the Acer System Administration Manager interface. The left sidebar contains a navigation menu with 'Services' selected. The main content area displays a table of services. The 'Shutdown' service is highlighted, and its 'Enable' button is circled in red. The bottom right corner of the window shows the firmware version 'Version:sa50-4.2-23'.

Status	Service Name	Enable/Disable
✖	Email	Enable
✔	Web	
✔	FTP	Disable
✖	DNS	Enable
✖	DHCP	Enable
✖	Proxy	Enable
✔	File Sharing	
✔	Printer Sharing	
✖	Service Account (Dial in, login, ftp)	Enable
✖	Shutdown	Enable

BIOS Version:V4.0 R01-A4 EN-JA


Version:sa50-4.2-23

Copyright © 2000 Acer Inc. and AniMeta Systems, Inc. All Rights Reserved

If you have a version earlier than V23, shown above, you can update it by using the Service.exe file.


How to Update the Firmware of an SA50 using the Patch (.PCH) file method.

2. Launch the service.exe file and click on the SA50 server you are using. Then enter in the Username and Password for this Server:-

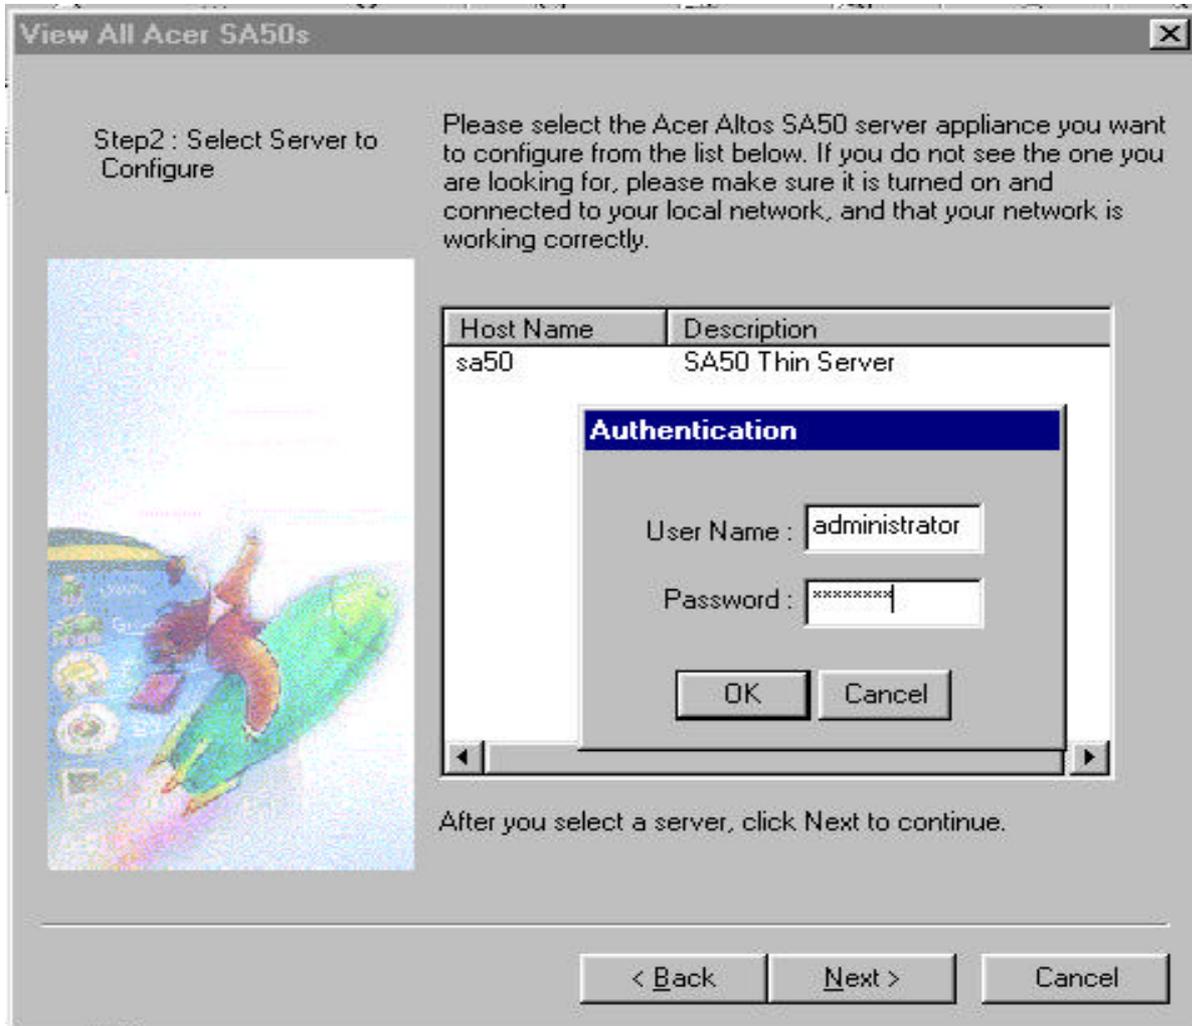


How to Update the Firmware of an SA50 using the Patch (.PCH) file method.

2. Select to Upgrade the Firmware of the SA50:-

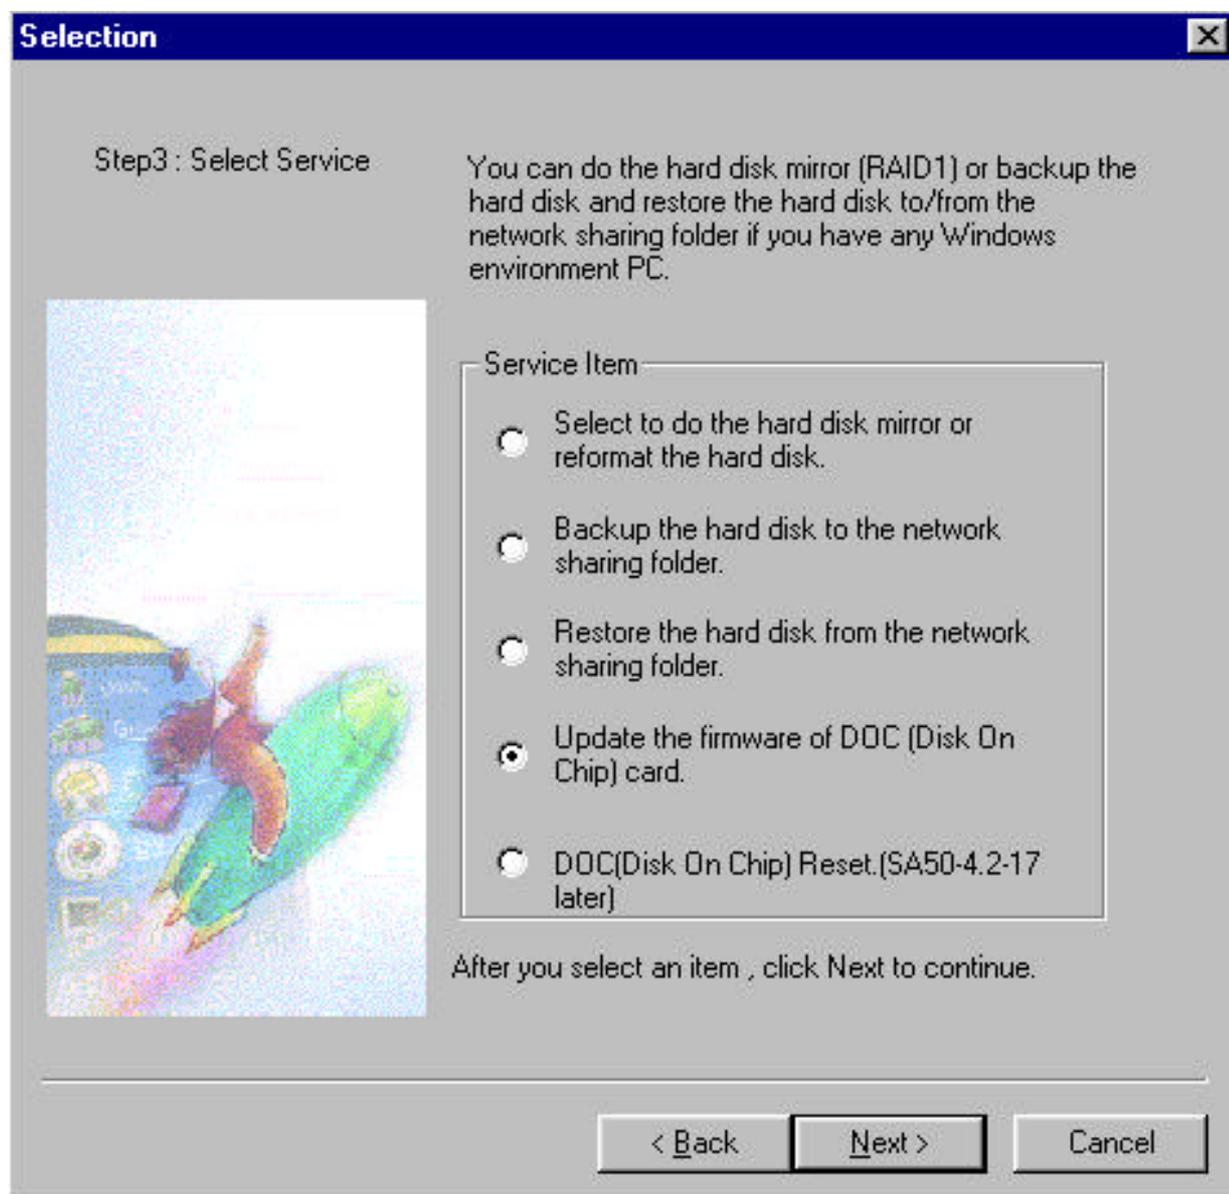

How to Update the Firmware of an SA50 using the Patch (.PCH) file method.

3. Using the Browse button, select the Source Path for the Patch file eg. 14-23.pch file:-

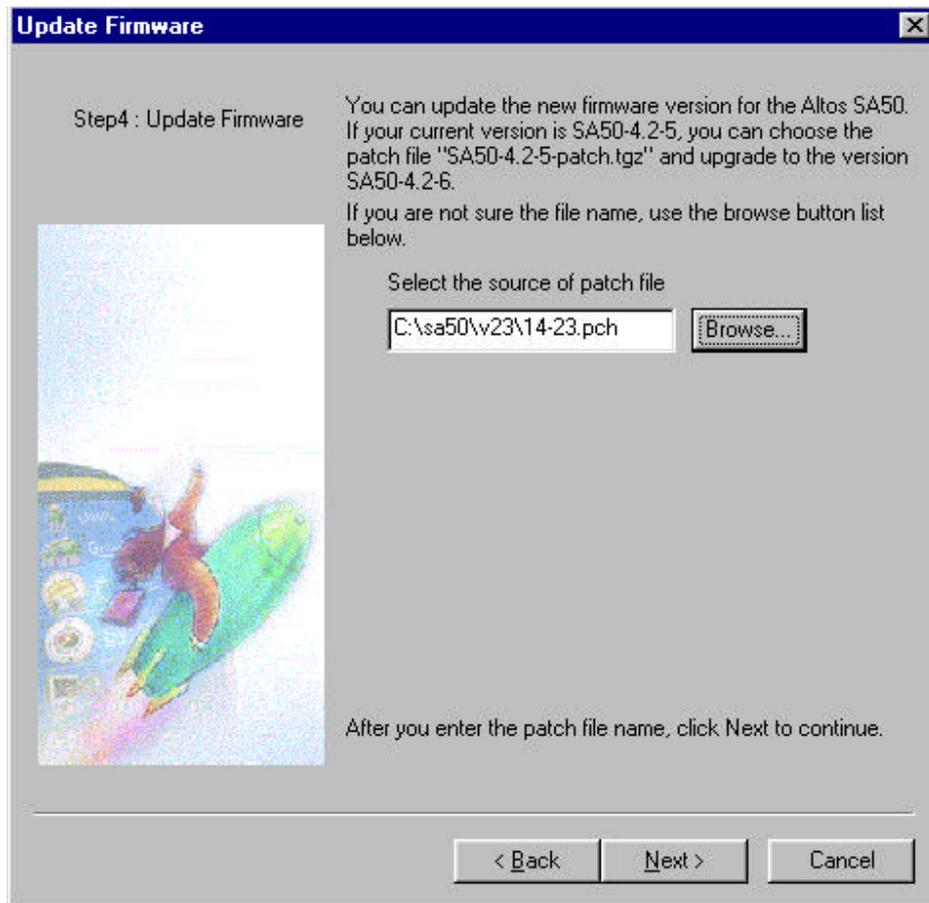

4. Congratulations! You have now finished upgrading the Firmware of your SA50.

